

FOLLOW US ON SOCIAL MEDIA
@QUALITYCHAINCORP



FLEX BINDER
FOLDING HANDLE
RATCHET BINDER

SEE PAGE 6
FOR DETAILS



XD ARMOR STRAPS
& RATCHETING
WINCH CAP

SEE PAGES 2 & 4
FOR DETAILS

2026-27
EFFECTIVE JUNE 2026

XD ARMOR

HEAVY DUTY STRAPS

LONGER LASTING ABRASION RESISTANT WEBBING WITH ANTI-FRAY PROTECTION

UNIQUE WEAVE CONSTRUCTION AND COATING PROCESS HEAVILY REDUCES WATER ABSORPTION AND FREEZING

2" XD ARMOR RATCHET STRAPS

WLL 3,666 LBS

FEATURING:
UPGRADED 12,000 LBS
RUBBER HANDLE RATCHET



2" x 30' w/FLAT HOOKS

CC23060FHXD



PART #
CC7031HR2XD



2" x 30' w/WIRE HOOKS

CC23060WHXD

4" XD ARMOR WINCH STRAPS

WLL 6,000 LBS



4" x 30' w/FLAT HOOK

CC4308FHXD



4" x 30' w/ V-RING

CC4308VRXD



*Can be cut to length

CC9045VB12 (100 PER BOX)

12" PLASTIC "V" BOARD

CC9045VB48 (10 PER BOX)

48" PLASTIC "V" BOARD



CC9041 (100 PER BOX)

PLASTIC CORNER PROTECTOR
FOR 2", 3" & 4" STRAPS



CC9046 (50 PER BOX)

6" STEEL CORNER PROTECTOR
FOR CHAIN, CABLE OR ROPE



CC9042 (L 12" X W 5.8")

2"- 4" RUBBER STRAP GUARD
CORNER PROTECTOR



DO NOT EXCEED WORKING LOAD LIMITS (WLL). NOT APPROVED FOR OVERHEAD LIFTING.



STRAPS AVAILABLE WITH THE FOLLOWING FITTINGS:



FLAT HOOK



WIRE HOOK



V-RING



CHAIN ANCHOR



SEWN LOOP

PART #	WIDTH	LENGTH	END FITTING	RATCHET (YES/NO)	WORKING LOAD LIMIT	QTY PER BOX
CC22760FH	2"	27'	FLAT HOOK	YES	3,335 LBS	10
CC22760WH	2"	27'	WIRE HOOK	YES	3,335 LBS	10
CC22760CX	2"	27'	CHAIN ANCHOR	YES	3,335 LBS	5
CC23060FH	2"	30'	FLAT HOOK	YES	3,335 LBS	10
CC23060WH	2"	30'	WIRE HOOK	YES	3,335 LBS	10
CC23060CX	2"	30'	CHAIN ANCHOR	YES	3,335 LBS	5
CC33060FH	3"	30'	FLAT HOOK	YES	5,400 LBS	4
CC33060WH	3"	30'	WIRE HOOK	YES	5,400 LBS	4
CC43060FH	4"	30'	FLAT HOOK	YES	5,400 LBS	4
CC43060WH	4"	30'	WIRE HOOK	YES	5,400 LBS	4
CC3306FH	3"	30'	FLAT HOOK	NO	5,400 LBS	10
CC4305FH	4"	30'	FLAT HOOK	NO	5,400 LBS	10
CC4305WH	4"	30'	WIRE HOOK	NO	5,400 LBS	10
CC4305VR	4"	30'	V-RING	NO	5,400 LBS	10
CC4305SL	4"	30'	SEWN LOOP	NO	5,400 LBS	10
CC4305CX	4"	30'	CHAIN ANCHOR	NO	5,400 LBS	5

OTHER LENGTHS, WIDTHS & FITTINGS ARE AVAILABLE UPON REQUEST

2" & 4" STRAPS AVAILABLE IN:

YELLOW RED BLUE ORANGE GREEN BLACK GREY

3" STRAPS AVAILABLE IN:

YELLOW RED



CC1525

SIDE MOUNT WELD-ON

Working Load Limit (WLL): **6,000 LBS**

WEIGHT 7.9LBS (5 PER BOX)



CC1530

UNDER MOUNT WELD-ON

Working Load Limit (WLL): **6,000 LBS**

WEIGHT 8LBS (5 PER BOX)



CC15452S

SIDE MOUNT PORTABLE
w/ BOLTS

Working Load Limit (WLL): **5,500 LBS**

WEIGHT 9.2LBS (5 PER BOX)



CC1572

UNDER MOUNT BOLT-ON
w/ 2" TOP PLATE

Working Load Limit (WLL): **5,500 LBS**

WEIGHT 8.5LBS (5 PER BOX)



CC1537N

NOTCHED SLIDING
FOR "C" TRACK

Working Load Limit (WLL): **6,000 LBS**

WEIGHT 10.9LBS (5 PER BOX)



CC1537LL

DOUBLE "L" SLIDING

Working Load Limit (WLL): **5,500 LBS**

WEIGHT 9.1LBS (5 PER BOX)



CC1537ET

SLIDING FOR
EAST TRAILERS

Working Load Limit (WLL): **5,500 LBS**

WEIGHT 8.4LBS (5 PER BOX)



CC15RWC

RATCHETING WINCH CAP

WEIGHT 3.4LBS

**NEW
PRODUCT**

WINCH BARS

w/ KNURLED HANDLES



CCWB-1

36" CHROME-PLATED

WEIGHT 5LBS (10 PER BOX)



CCWB-1B

36" BLACK PAINTED

WEIGHT 5LBS (10 PER BOX)



CCWB-3

39" CHROME-PLATED
- COMBINATION

WEIGHT 7LBS (10 PER BOX)



CCWB-3B

39" BLACK PAINTED
- COMBINATION

WEIGHT 7LBS (10 PER BOX)



CCDR037FW (L 2.75" x W 3.4")

3/8" FORGED D-RING
w/ WELD-ON CLIP
(WLL: 3,000 LBS / 1,361 KGS)



CCDR050FW (L 3.5" x W 3.4")

1/2" FORGED D-RING
w/ WELD-ON CLIP
(WLL: 4,000 LBS / 1,814 KGS)



CCDR062FW (L 4.3" x W 4.3")

5/8" FORGED D-RING
w/ WELD-ON CLIP
(WLL: 6,300 LBS / 2,858 KGS)



CCDR062FBW (L 4.0" x W 4.5" x H 2")

5/8" FORGED BENT D-RING
w/ WELD-ON CLIP
(WLL: 6,300 LBS / 2,858 KGS)



CCDR075FW (L 4.5" x W 4.5")

3/4" FORGED D-RING
w/ WELD-ON CLIP
(WLL: 9,000 LBS / 4,082 KGS)



CCDR100FWS (L 5" x W 5")

1" FORGED D-RING
w/ WELD-ON CLIP - SHORT
(WLL: 15,600 LBS / 7,076 KGS)



CCDR100FWL (L 6" x W 5")

1" FORGED D-RING
w/ WELD-ON CLIP - LONG
(WLL: 15,600 LBS / 7,076 KGS)



CCDR100FBW (L 5.4" x W 5" x H 2.6")

1" FORGED BENT D-RING
w/ WELD-ON CLIP
(WLL: 15,600 LBS / 7,076 KGS)



CCDR025B (L 1.75" x W 1.5")

1/4" WELDED WIRE D-RING
w/ BOLT-ON CLIP
(WLL: 400 LBS / 181 KGS)



CCDR037B (L 2.37" x W 2.35")

3/8" WELDED WIRE D-RING
w/ BOLT-ON CLIP
(WLL: 1,667 LBS / 756 KGS)



CCDR050FBSZ (L 3.5" x W 3.4")

1/2" FORGED D-RING
w/ BOLT-ON CLIP - SILVER ZINC
(WLL: 4,000 LBS / 1,814 KGS)



CCDR050FB (L 3.5" x W 3.4")

1/2" FORGED D-RING
w/ BOLT-ON CLIP
(WLL: 4,000 LBS / 1,814 KGS)



CC1016JJ

5/8" WELD-ON DOUBLE J HOOK
- FLAME CUT PLATE STOCK
(WLL: 6,600 LBS / 2,994 KGS)



CC1017S

5/8" WELD-ON SMALL C HOOK
- FLAME CUT PLATE STOCK
(WLL: 6,600 LBS / 2,994 KGS)



CC1017L

5/8" WELD-ON LARGE C HOOK
- FLAME CUT PLATE STOCK
(WLL: 6,600 LBS / 2,994 KGS)



CC1038BTH

3/8" BOLT-ON ROPE
J HOOK



CCWG312

5/16" WELD-ON
GRAB HOOK
WLL: 4,700 LBS



CCWG375

3/8" WELD-ON
GRAB HOOK
WLL: 6,600 LBS



CCWG500

1/2" WELD-ON
GRAB HOOK
WLL: 11,300 LBS



DO NOT EXCEED WORKING LOAD LIMITS (WLL). NOT APPROVED FOR OVERHEAD LIFTING.

LEVER LOAD BINDERS

LEVER CHAIN BINDER

	Use with:	Working Load Limit (WLL)	
CCBLT1	1/4" (G70)	3,150 LBS / 1,429 KGS	(10 PER BOX)
CCBLT5	5/16" (G70) - 3/8" (G70)	6,600 LBS / 2,994 KGS	(5 PER BOX)
CCBLT3	3/8" (G70) - 1/2" (G43)	9,200 LBS / 4,173 KGS	(5 PER BOX)



RECOILLESS LEVER CHAIN BINDER

	Use with:	Working Load Limit (WLL)	
CCBLT5R	5/16" (G70) - 3/8" (G70)	6,600 LBS / 2,994 KGS	(5 PER BOX)



RATCHET LOAD BINDERS

FLEX BINDER FOLDING HANDLE RATCHET CHAIN BINDER

- 3-POSITION PAWL FOR EASY ADJUSTMENT IN EITHER DIRECTION- EXTENSION, TAKE-UP OR FREE SPIN
- HIGH VISIBILITY GREEN POWDER COAT WITH GOLD ZINC HOOKS AND A VINYLE COATED BARREL FOR SAFE GRIP
- LOCKABLE DESIGN - ADD A LONG-SHANK PADLOCK FOR ADDED SECURITY & THEFT PREVENTION

	Use with:	Working Load Limit (WLL)	
CCBRT5-FLX	5/16" (G100) - 3/8" (G100)	7,100 LBS / 3,220 KGS	(4 PER BOX)
CCBRT3-FLX	3/8" (G100) - 1/2" (G80)	12,000 LBS / 5,443 KGS	(4 PER BOX)
CCBRT2-FLX	1/2" (G100) - 5/8" (G80)	18,100 LBS / 8,210 KGS	(2 PER BOX)



RATCHET CHAIN BINDER


	Use with:	Working Load Limit (WLL)	
CCBRT1	1/4" (G70)	3,150 LBS / 1,429 KGS	(10 PER BOX)
CCBRT5	5/16" (G70) - 3/8" (G70)	6,600 LBS / 2,994 KGS	(5 PER BOX)
CCBRT3	3/8" (G70) - 1/2" (G43)	9,200 LBS / 4,173 KGS	(5 PER BOX)
CCBRT2	1/2" (G70) - 5/8" (G43)	13,000 LBS / 5,897 KGS	(5 PER BOX)



EXTREME DUTY RATCHET CHAIN BINDER

- TWO PIECE HANDLE AND SPRING LOADED RATCHET GEAR FOR EASY CLEAN-UP OF MUD, ICE AND DEBRIS
- USE WITH GRADE 70, 80 OR 100 CHAIN

	Use with:	Working Load Limit (WLL)	
CCBRT5-XHD	5/16" (G100) - 3/8" (G100)	8,800 LBS / 3,992 KGS	(5 PER BOX)
CCBRT3-XHD	3/8" (G100) - 1/2" (G80)	12,000 LBS / 5,443 KGS	(5 PER BOX)

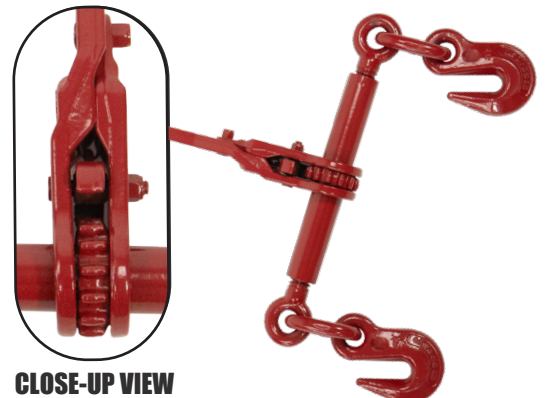

CLOSE-UP VIEW

DO NOT EXCEED WORKING LOAD LIMITS (WLL). NOT APPROVED FOR OVERHEAD LIFTING.

CHAIN ASSEMBLIES WITH CLEVIS GRAB HOOKS

GRADE 70 (G70) TRANSPORT CHAIN ASSEMBLIES

*MEETS DOT / CVSA REQUIREMENTS

YELLOW ZINC FINISH

NACM STANDARD LINK TRANSPORT CHAIN

	SIZE	LENGTH	Working Load Limit (WLL)	PCS/DRUM
CCG70516	5/16"	16'	4,700 LBS / 2,132 KGS	30
CCG70520	5/16"	20'	4,700 LBS / 2,132 KGS	25
CCG70520BX	5/16"	20'	4,700 LBS / 2,132 KGS	1 / BOX
CCG70525	5/16"	25'	4,700 LBS / 2,132 KGS	20
	SIZE	LENGTH	Working Load Limit (WLL)	PCS/DRUM
CCG70316	3/8"	16'	6,600 LBS / 2,994 KGS	20
CCG70320	3/8"	20'	6,600 LBS / 2,994 KGS	20
CCG70320BX	3/8"	20'	6,600 LBS / 2,994 KGS	1 / BOX
CCG70325	3/8"	25'	6,600 LBS / 2,994 KGS	15
	SIZE	LENGTH	Working Load Limit (WLL)	PCS/DRUM
CCG70220	1/2"	20'	11,300 LBS / 5,126 KGS	10
CCG70225	1/2"	25'	11,300 LBS / 5,126 KGS	10



*individually boxed packaging available (call for pricing)



ASTM SHORT LINK TRANSPORT CHAIN

	SIZE	LENGTH	Working Load Limit (WLL)	PCS/DRUM
CCG70520S	5/16"	20'	4,700 LBS / 2,132 KGS	25
CCG70320S	3/8"	20'	6,600 LBS / 2,994 KGS	20



ASTM Short Link chain features shorter, more round links than traditional NACM Standard Link. The increased number of links per foot provides more attachment points and greater flexibility. The compact link design reduces tangling, kinking and link deformation under heavy loads while allowing the chain to wrap more easily around cargo. Short link chain also offers more compact storage without tangling. While ASTM Short Link contains more steel per foot - making it slightly heavier and more expensive - many users prefer it for superior handling, durability and performance.

**NACM
STANDARD LINK**

**ASTM
SHORT LINK**

