QUALITY CHAIN CORP

CAT-2025
EFFECTIVE MARCH 2024



EASYSOX
THE ALTERNATIVE TRACTION DEVICE

VOLT 7

VIKING

KING COBRA

TRYGG

NORDIC tire chains
engineered in Canada

QUALTRAX

FOLLOW US ON SOCIAL MEDIA
@QUALITYCHAINCORP

WARNING: READ BEFORE USE!

- Vehicle operators unwilling to accept the possible risks associated with the use of traction devices, such as but not limited to accident, vehicle damage, tire damage or wheel damage, should not use any traction device on their vehicle.
- Traction devices may cause cosmetic scuffing on tire when installed. This condition is unavoidable on certain tread types and tire designs.
- Wheels are also at risk of cosmetic scuffing with the use of traction devices. Wheels using low profile tires such as 35, 40, 45 and 50 series tires are at higher risk due to the short height of the tire sidewall. QCC will not warranty alloy wheels or wheel covers damaged by chains or chain tighteners.
- Traction devices must hang down over the sidewall of the tire in order to stay on the tire while being used.
- Vehicle components (ABS sensors, brake lines, etc.) can be damaged if the traction device strikes the components. Pre-fit traction device before use and check for adequate clearance.
- Traction devices can break during the course of their service life.
  (If traction device breaks, remove immediately).
- Traveling at speeds faster than 30 MPH increases the chance of component failure.
- Using traction devices with component failure is extremely unsafe and may cause loss of control or damage to the vehicle. **(If traction device breaks, remove immediately.)**
- Traction devices with broken components should immediately be repaired or replaced.
- The use of traction devices are at the risk of the vehicle operator.
- Always wear eye protection when installing rubber bungees, tighteners or straps.

If these warnings are ignored, QCC and their distributors are not responsible for injury or vehicle damage. Under no circumstances will compensation for damage be considered by QCC where the damage is found to have resulted from the misuse of any traction device.

WARRANTIES

SPEEDS OVER 30 MPH, IMPROPER FIT OR IMPROPER INSTALLATION VOIDS THESE WARRANTIES

1. DISCLAIMER OF WARRANTIES: The products listed in this catalog are warranted free from defects in workmanship and material for thirty (30) days from the date of delivery. No other express warranty is given and no affirmation of seller, by words or action, shall constitute a warranty.
2. The above warranty is made only to the dealer, retailer or other direct customer of Quality Chain Corp. (hereby referred to as QCC). QCC makes no warranty to the end user and prohibits the transfer of the warranty given above to its direct customer or to any subsequent purchaser, including but not limited to end user.
3. REMEDIES: The buyer's sole remedy for breach of any warranty is limited exclusively to obtaining, at the discretion of the seller, either credit, repair or replacement of any product sold hereunder by QCC. Product shall be returned to seller's plant, transportation prepaid within thirty (30) days after the delivery to a user and within ten (10) days of discovery of alleged defect. QCC inspection shall identify the presence of any defects. Buyer shall not be entitled to recover any incidental or consequential damages. No material shall be returned without written consent of the seller.

RETURN MERCHANDISE: No merchandise will be accepted without prior written authorization. All return merchandise must be shipped freight prepaid. Collect shipments will be refused. A 20% restock/handling charge will be deducted from the credit amount.

TABLE OF CONTENTS

PASSENGER 5 - 16

LIGHT TRUCK / SUV 17 - 34

COMMERCIAL TRUCK 35 - 58

LOADER / GRADER 59 - 69

FORKLIFT 70 - 73

SKID STEER 74 - 77

ATV / UTV 78 - 79

FORESTRY 80 - 86

TRACTOR 87 - 97

GARDEN TRACTOR / SNOW BLOWER 98 - 99

ACCESSORIES 100 -115

MISC. INFORMATION 116 - 119

FINDING YOUR TIRE SIZE

THE TIRE SIZE CAN ALWAYS BE FOUND ON THE SIDEWALL OF A TIRE. IT USUALLY LOOKS LIKE THE EXAMPLE SHOWN: P235/70R15



TIRE TYPE: For example "P" for passenger or "LT" for Light Truck.

TIRE WIDTH: The width of the tire in millimeters (mm).

ASPECT RATIO: The sidewall height (from rim to tread), shown as a percentage of the tire width. In this example, the sidewall height is 70% of the tire width.

TIRE CONSTRUCTION: "R" stands for Radial. This is not as important when choosing a winter traction device.

RIM DIAMETER: The diameter of the rim in inches (in).

MINIMUM CLEARANCE REQUIREMENTS



PASSENGER AND LIGHT TRUCK

SAE CLASS	MINIMUM TREAD FACE CLEARANCE (A)	MINIMUM SIDEWALL CLEARANCE (C)
CLASS "S"	1.46" / 37 MM	0.59" / 15 MM
CLASS "U"	1.97" / 50 MM	0.91" / 23 MM
CLASS "W"	2.5" / 63.5 MM	1.5" / 38.1 MM

The minimum clearance specified must be maintained around spring clips, spring bolts, fenders, braces, splash pans, fuel lines, brake lines, brake controls and other mechanical components.

The tire size must be known in order to select a tire chain of correct fit. Traction products not only have to fit the tire, but must also fit within the space provided around the tires. It is important to check your vehicle owner's manual. The restricted wheel clearances in most of today's vehicles may require the use of SAE Class "S" tire chains.

The different SAE Classes incorporate two different measurements: (A) from the tread face of the tire to the nearest obstruction, and (C) from the inside sidewall of the tire to the nearest obstruction.

Please refer to your owner's manual for specific tire chain recommendations for your vehicle.

DEFINITIONS OF SAE CLASSIFICATIONS

S.A.E Classifications refers to the area around the drive tires that is allowed for tire chains and cables. This classification is created by the Society of Automotive Engineers and almost every vehicle since the mid 90's has been placed in a category. It is always recommended the vehicle owner look in their owner's manual before purchasing a traction product.

Regular (non-reinforced) passenger tire chains and cables for vehicles with restricted wheel well clearances.

Regular (non-reinforced) and lug reinforced passenger tire chains for vehicles with regular (non-restricted) wheel well clearances.

Those passenger tire chains that use light truck components, as well as some light truck chains.

EASYSOX

- PERFECT FOR WALKING ON PACKED SNOW AND ICE
- PROTECTION IN PARKING LOTS, DRIVEWAYS AND ON SIDEWALKS
- FIBERS IN FABRIC EXPAND TO GRIP WITH EACH STEP
- QUICKLY SLIDE ON/OFF AS NEEDED
- MACHINE WASHABLE & EASY TO STORE

NEW PRODUCT

SHOE SOCKS

MADE IN SPAIN

STOCK NUMBER	DESCRIPTION	MEN'S SHOE SIZE	WOMEN'S SHOE SIZE
ES-SM	KID'S SHOE SOCKS	-	-
ES-MD	MEDIUM SHOE SOCKS	4 - 7.5	5.5 - 9
ES-LG	LARGE SHOE SOCKS	8 - 11.5	9.5 - 13
ES-XL	EXTRA LARGE SHOE SOCKS	12 & UP	14 & UP



SHOE SOCKS

SHOE SPIKES

STOCK NUMBER	DESCRIPTION	SHOE SIZE
SC-SPIKES	UNIVERSAL SHOE SPIKES	ONE SIZE FITS ALL



SC-SPIKES

⚠ WARNING: ALWAYS USE CAUTION WHEN WALKING ON SNOW OR ICE COVERED SURFACES. THE USE OF SHOE SOCKS/SPIKES DOES NOT ALWAYS LESSEN THE RISK OF SLIPPING AND FALLING.



PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

TIRE SIZE	EASYSOX *ES* Page 12	VOLT CABLE *QV300* Page 15	HIGH VOLT CABLE *QV500* Page 15	COBRA CABLE *1000* Page 14	DIAMOND BACK *1500Q* Page 16	TYPE "PL" LINK CHAIN *1100* Page 14
185/70-13	***ES72***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
155/80-13	***ES81***	***QV315***	-	***1014***	***1515Q***	***1114***
175/80-13	***ES77***	***QV319***	***QV539***	***1022***	***1525Q***	***1122***
185/60-14	***ES81***	***QV319***	-	***1018***	***1520Q***	***1118***
195/60-14	***ES72***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
175/65-14	***ES81***	***QV315***	-	***1018***	***1520Q***	***1118***
185/65-14	***ES72***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
175/70-14	***ES72***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
185/70-14	***ES77***	***QV323***	***QV539***	***1026***	***1530Q***	***1126***
195/70-14	***ES78***	***QV327***	***QV547***	***1030***	***1535Q***	***1130***
205/70-14	***ES73***	***QV329***	***QV547***	***1034***	***1540Q***	***1134***
215/70-14	***ES79***	***QV335***	***QV547***	***1034***	***1545Q***	***1134***
195/75-14	***ES79***	***QV327***	***QV539***	***1030***	***1535Q***	***1130***
205/75-14	***ES79***	***QV331***	***QV539***	***1034***	***1540Q***	***1134***
215/75-14	***ES75***	***QV335***	***QV555***	***1034***	***1545Q***	***1138***
285/40-15	-	-	***QV555***	***1038***	-	***1138***
195/45-15	***ES71***	***QV315***	-	***1026***	***1520Q***	***1126***
195/50-15	***ES81***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
205/50-15	***ES76***	***QV323***	***QV539***	***1026***	***1525Q***	***1126***
225/50-15	***ES77***	***QV327***	***QV539***	***1030***	***1535Q***	***1130***
235/50-15	-	***QV327***	***QV547***	***1034***	-	***1138***
245/50-15	***ES78***	***QV331***	***QV555***	***1038***	-	***1138***
265/50-15	***ES79***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
275/50-15	-	***QV339***	***QV555***	***1042***	***1555Q***	***1142***
295/50-15	***ES80***	***QV339***	***QV563***	***1046***	-	***1146***
175/55-15	***ES81***	***QV315***	-	***1018***	***1520Q***	***1118***
185/55-15	***ES81***	***QV319***	***QV539***	***1022***	***1525Q***	***1122***
195/55-15	***ES72***	***QV323***	***QV539***	***1022***	***1525Q***	***1122***
205/55-15	***ES77***	***QV327***	***QV539***	***1034***	***1535Q***	***1134***
225/55-15	***ES78***	***QV327***	***QV547***	***1034***	***1540Q***	***1134***
155/60-15	***ES71***	***QV311***	-	***1014***	-	***1114***
165/60-15	***ES81***	***QV315***	-	***1018***	***1520Q***	***1118***
175/60-15	***ES72***	***QV319***	***QV539***	***1018***	***1525Q***	***1118***
185/60-15	***ES72***	***QV323***	***QV539***	***1026***	***1525Q***	***1126***
195/60-15	***ES77***	***QV327***	***QV539***	***1030***	***1530Q***	***1130***
205/60-15	***ES78***	***QV331***	***QV547***	***1030***	***1535Q***	***1130***
215/60-15	***ES73***	***QV331***	***QV547***	***1034***	***1540Q***	***1138***
225/60-15	***ES79***	***QV331***	***QV547***	***1034***	***1547Q***	***1134***
235/60-15	***ES79***	***QV335***	***QV555***	***1038***	***1550Q***	***1138***
245/60-15	***ES74***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
255/60-15	***ES75***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
265/60-15	-	-	***QV563***	***1042***	***1555Q***	***1142***
275/60-15	***ES83***	***QV729***	***QV563***	***1046***	***1555Q***	***1146***
145/65-15	***ES71***	***QV315***	-	***1014***	-	***1114***
165/65-15	***ES72***	***QV319***	***QV539***	***1022***	***1525Q***	***1122***
175/65-15	***ES77***	***QV319***	***QV539***	***1022***	***1525Q***	***1122***
185/65-15	***ES77***	***QV323***	***QV539***	***1030***	***1530Q***	***1130***
195/65-15	***ES73***	***QV329***	***QV547***	***1030***	***1535Q***	***1130***

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

TIRE SIZE	EASYSOX *ES* Page 12	VOLT CABLE *QV300* Page 15	HIGH VOLT CABLE *QV500* Page 15	COBRA CABLE *1000* Page 14	DIAMOND BACK *1500Q* Page 16	TYPE "PL" LINK CHAIN *1100* Page 14
205/65-15	***ES79***	***QV329***	***QV547***	***1034***	***1540Q***	***1134***
215/65-15	***ES79***	***QV335***	***QV555***	***1038***	***1545Q***	***1138***
225/65-15	***ES74***	***QV339***	***QV555***	***1038***	-	***1138***
235/65-15	***ES75***	***QV339***	***QV563***	***1042***	***1555Q***	***1142***
255/65-15	***ES83***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
175/70-15	***ES78***	***QV323***	***QV539***	***1022***	***1530Q***	***1122***
185/70-15	***ES73***	***QV323***	***QV547***	***1030***	***1535Q***	***1130***
185/70-15.5	***ES79***	***QV331***	***QV547***	***1030***	-	***1130***
195/70-15	***ES79***	***QV329***	***QV547***	***1034***	***1540Q***	***1134***
205/70-15	***ES74***	***QV335***	***QV555***	***1034***	***1545Q***	***1134***
215/70-15	***ES74***	***QV335***	***QV555***	***1038***	***1550Q***	***1138***
225/70-15	***ES75***	***QV343***	***QV563***	***1038***	***1553Q***	***1138***
235/70-15	***ES83***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
255/70-15	***ES83***	***QV735***	***QV571***	***1046***	***2319LW***	***1146***
185/75-15	-	***QV331***	***QV547***	***1026***	***1535Q***	***1130***
195/75-15	***ES74***	***QV331***	***QV547***	***1030***	***1540Q***	***1130***
205/75-15	***ES75***	***QV335***	***QV555***	***1034***	***1547Q***	***1138***
215/75-15	***ES80***	***QV339***	***QV563***	***1038***	***1550Q***	***1138***
225/75-15	***ES80***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
235/75-15	***ES82***	***QV343***	***QV571***	***1042***	***1555Q***	***1142***
155/80-15	***ES78***	***QV319***	***QV539***	***1022***	-	***1122***
165/80-15	***ES73***	***QV323***	***QV547***	***1022***	***1530Q***	***1122***
175/80-15	***ES79***	***QV329***	***QV547***	-	-	-
195/80-15	***ES75***	***QV335***	***QV563***	***1034***	***1545Q***	***1134***
215/80-15	***ES82***	***QV343***	***QV563***	***1038***	-	***1142***
205/40-16	***ES81***	***QV323***	***QV539***	***1026***	***1525Q***	***1126***
215/40-16	***ES81***	***QV323***	***QV539***	***1030***	***1525Q***	***1130***
195/45-16	***ES81***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
205/45-16	***ES76***	***QV323***	***QV539***	***1030***	***1525Q***	***1130***
215/45-16	***ES76***	***QV323***	***QV539***	***1030***	***1535Q***	***1130***
225/45-16	***ES77***	-	***QV539***	***1034***	***1540Q***	***1134***
245/45-16	***ES78***	***QV331***	***QV547***	***1038***	***1547Q***	***1138***
255/45-16	***ES73***	***QV335***	***QV555***	***1038***	-	***1138***
185/50-16	***ES72***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
195/50-16	***ES76***	***QV323***	***QV539***	***1030***	***1530Q***	***1130***
205/50-16	***ES77***	***QV327***	***QV539***	***1034***	***1535Q***	***1134***
215/50-16	***ES77***	***QV331***	***QV547***	***1034***	-	***1134***
225/50-16	***ES78***	***QV335***	***QV547***	***1034***	***1547Q***	***1134***
235/50-16	***ES73***	***QV335***	***QV555***	***1038***	***1545Q***	***1138***
245/50-16	***ES79***	***QV339***	***QV555***	***1038***	***1555Q***	***1138***
255/50-16	***ES79***	***QV343***	***QV555***	***1042***	***1555Q***	***1142***
265/50-16	-	***QV343***	***QV555***	***1042***	-	***1142***
175/55-16	***ES76***	***QV319***	***QV539***	***1026***	***1525Q***	***1126***
185/55-16	***ES77***	***QV323***	***QV539***	***1030***	***1535Q***	***1130***
195/55-16	***ES77***	***QV327***	***QV539***	***1030***	***1540Q***	***1130***
205/55-16	***ES78***	***QV331***	***QV547***	***1034***	***1540Q***	***1134***
215/55-16	***ES73***	***QV331***	***QV547***	***1034***	***1545Q***	***1134***
225/55-16	***ES79***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

TIRE SIZE	EASYSOX *ES* Page 12	VOLT CABLE *QV300* Page 15	HIGH VOLT CABLE *QV500* Page 15	COBRA CABLE *1000* Page 14	DIAMOND BACK *1500Q* Page 16	TYPE "PL" LINK CHAIN *1100* Page 14
235/55-16	***ES79***	***QV339***	***QV555***	***1038***	-	***1138***
245/55-16	***ES74***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
255/55-16	***ES75***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
175/60-16	***ES77***	***QV323***	***QV547***	***1026***	***1525Q***	***1122***
185/60-16	***ES78***	***QV327***	***QV547***	***1030***	***1530Q***	***1122***
195/60-16	***ES73***	***QV329***	***QV547***	***1030***	***1535Q***	***1130***
205/60-16	***ES79***	***QV331***	***QV547***	***1034***	***1542Q***	***1138***
215/60-16	***ES79***	***QV335***	***QV555***	***1038***	***1545Q***	***1138***
225/60-16	***ES74***	***QV339***	***QV555***	***1038***	***1545Q***	***1138***
235/60-16	***ES75***	***QV339***	***QV563***	***1042***	***1550Q***	***1142***
245/60-16	***ES80***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
255/60-16	***ES83***	***QV343***	***QV555***	-	-	-
195/65-16	***ES79***	***QV329***	***QV547***	***1034***	***1542Q***	***1134***
205/65-16	***ES74***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***
215/65-16	***ES74***	***QV335***	***QV555***	***1038***	***1550Q***	***1138***
225/65-16	***ES80***	***QV339***	***QV563***	***1038***	***1553Q***	***1138***
235/65-16	***ES80***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
205/70-16	***ES75***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***
215/70-16	***ES80***	***QV339***	***QV563***	***1038***	***1550Q***	***1138***
225/70-16	***ES82***	***QV343***	***QV571***	***1046***	***1555Q***	***1146***
185/75-16	***ES74***	***QV335***	***QV555***	***1030***	***1542Q***	***1130***
195/75-16	***ES80***	***QV339***	***QV563***	***1038***	***1545Q***	***1138***
205/75-16	-	***QV343***	***QV563***	***1038***	***1550Q***	***1138***
215/75-16	***ES82***	***QV343***	***QV571***	***1042***	-	***1142***
225/75-16	***ES82***	***QV343***	***QV571***	***1042***	***1555Q***	***1142***
175/80-16	***ES75***	***QV331***	***QV555***	***1030***	-	***1134***
195/80-16	-	***QV339***	***QV563***	***1038***	-	***1142***
205/80-16	-	***QV343***	***QV571***	***1042***	-	***1142***
215/80-16	-	***QV343***	***QV575***	-	-	-
205/40-17	***ES76***	***QV323***	***QV539***	***1026***	***1530Q***	***1126***
215/40-17	***ES77***	***QV327***	***QV539***	***1034***	***1535Q***	***1134***
225/40-17	***ES77***	-	***QV539***	-	-	-
235/40-17	***ES77***	***QV335***	***QV547***	***1034***	***1540Q***	***1134***
245/40-17	***ES78***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***
255/40-17	***ES73***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***
265/40-17	-	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
275/40-17	***ES79***	***QV343***	***QV555***	***1042***	***1553Q***	***1142***
285/40-17	***ES80***	***QV339***	***QV563***	***1046***	-	***1146***
195/45-17	***ES77***	***QV323***	***QV539***	***1030***	-	***1130***
205/45-17	***ES77***	***QV327***	***QV539***	***1030***	***1535Q***	***1130***
215/45-17	***ES78***	***QV331***	***QV547***	***1030***	***1540Q***	***1130***
225/45-17	***ES78***	***QV335***	***QV547***	***1034***	***1545Q***	***1134***
235/45-17	***ES73***	***QV335***	***QV555***	***1038***	***1545Q***	***1138***
245/45-17	***ES79***	***QV343***	***QV555***	***1042***	***1547Q***	***1138***
255/45-17	***ES79***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
205/50-17	***ES73***	***QV331***	***QV547***	***1034***	***1545Q***	***1134***
215/50-17	***ES79***	***QV331***	***QV547***	***1038***	***1547Q***	***1138***
225/50-17	***ES79***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

TIRE SIZE	EASYSOX *ES* Page 12	VOLT CABLE *QV300* Page 15	HIGH VOLT CABLE *QV500* Page 15	COBRA CABLE *1000* Page 14	DIAMOND BACK *1500Q* Page 16	TYPE "PL" LINK CHAIN *1100* Page 14
235/50-17	***ES79***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
245/50-17	***ES74***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
255/50-17	***ES75***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
175/55-17	***ES77***	***QV323***	***QV539***	***1022***	***1530Q***	***1122***
205/55-17	***ES79***	***QV335***	***QV555***	***1034***	-	***1134***
215/55-17	***ES74***	***QV335***	***QV555***	***1038***	***1545Q***	***1138***
225/55-17	***ES74***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
235/55-17	***ES75***	***QV343***	***QV563***	***1042***	***1553Q***	***1142***
245/55-17	***ES80***	***QV339***	***QV563***	***1042***	***1555Q***	***1142***
255/55-17	***ES83***	***QV729***	***QV563***	***1673***	***2317LW***	2219QC
275/55-17	-	***QV741***	***QV575***	***1673***	***2319LW***	3210QC
195/60-17	***ES74***	***QV335***	***QV555***	***1034***	***1545Q***	***1134***
215/60-17	***ES75***	***QV339***	***QV563***	***1042***	***1553Q***	***1142***
225/60-17	***ES80***	***QV339***	***QV563***	***1042***	***1555Q***	***1142***
235/60-17	***ES80***	***QV343***	***QV563***	***1042***	***1555Q***	***1146***
215/65-17	***ES80***	***QV339***	***QV563***	***1042***	***1555Q***	***1142***
225/65-17	***ES82***	***QV343***	***QV571***	***1046***	***1555Q***	***1146***
235/65-17	***ES82***	***QV729***	***QV571***	***1046***	***1555Q***	***1146***
245/65-17	***ES83***	***QV735***	***QV575***	***1046***	***2319LW***	***1146***
215/70-17	***ES82***	***QV729***	***QV571***	***1042***	-	***1142***
225/70-17	-	***QV729***	***QV575***	***1046***	***1555Q***	***1146***
215/35-18	***ES77***	***QV327***	***QV539***	***1030***	***1535Q***	***1130***
225/35-18	***ES77***	***QV329***	***QV547***	***1034***	***1542Q***	***1134***
235/35-18	***ES77***	***QV331***	***QV547***	***1038***	***1542Q***	***1138***
245/35-18	***ES78***	***QV331***	***QV555***	***1038***	***1545Q***	***1138***
255/35-18	***ES73***	***QV335***	***QV555***	***1038***	***1550Q***	***1138***
265/35-18	***ES79***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
275/35-18	***ES79***	***QV343***	***QV555***	***1046***	***1550Q***	***1146***
285/35-18	***ES80***	***QV339***	***QV555***	***1046***	-	***1146***
295/35-18	***ES80***	***QV729***	***QV555***	-	-	-
205/40-18	***ES77***	***QV327***	***QV539***	***1030***	***1535Q***	***1130***
215/40-18	***ES78***	***QV331***	***QV547***	***1034***	***1547Q***	***1134***
225/40-18	***ES73***	***QV335***	***QV547***	***1034***	***1547Q***	***1134***
235/40-18	***ES79***	***QV335***	***QV555***	***1038***	***1547Q***	***1138***
245/40-18	***ES79***	***QV339***	***QV555***	***1038***	***1550Q***	***1138***
255/40-18	***ES79***	***QV343***	***QV555***	***1042***	***1553Q***	***1142***
265/40-18	***ES74***	***QV343***	***QV555***	***1042***	***1553Q***	***1142***
275/40-18	***ES80***	***QV343***	***QV563***	***1046***	***1555Q***	***1146***
285/40-18	***ES80***	***QV343***	***QV563***	-	-	-
215/45-18	***ES79***	***QV331***	***QV547***	***1038***	***1547Q***	***1138***
225/45-18	***ES79***	***QV335***	***QV555***	***1038***	***1550Q***	***1138***
235/45-18	***ES74***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
245/45-18	***ES75***	***QV343***	***QV563***	***1042***	***1550Q***	***1142***
255/45-18	***ES75***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
275/45-18	***ES80***	***QV735***	***QV563***	***1046***	***2319LW***	***1146***
215/50-18	***ES75***	***QV339***	***QV563***	***1042***	***1553Q***	***1142***
225/50-18	***ES75***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
235/50-18	***ES75***	***QV343***	***QV563***	***1046***	***1553Q***	***1146***

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.


TIRE SIZE	EASYSOX *ES* Page 12	VOLT CABLE *QV300* Page 15	HIGH VOLT CABLE *QV500* Page 15	COBRA CABLE *1000* Page 14	DIAMOND BACK *1500Q* Page 16	TYPE "PL" LINK CHAIN *1100* Page 14
245/50-18	***ES80***	***QV343***	***QV563***	***1042***	***1555Q***	***1146***
255/50-18	***ES83***	***QV343***	***QV563***	***1042***	-	-
205/55-18	***ES75***	***QV339***	***QV563***	***1038***	-	***1138***
215/55-18	***ES75***	***QV339***	***QV571***	***1042***	***1553Q***	***1142***
225/55-18	***ES80***	***QV339***	***QV563***	***1042***	***1553Q***	***1142***
235/55-18	***ES80***	***QV729***	***QV563***	***1046***	-	***1146***
255/55-18	***ES82***	***QV735***	***QV575***	***1046***	***2319LW***	***1146***
215/60-18	***ES80***	***QV339***	***QV571***	***1042***	***1555Q***	***1142***
225/60-18	***ES82***	***QV729***	***QV571***	***1046***	***1555Q***	***1146***
235/60-18	***ES82***	***QV729***	***QV571***	***1046***	***2317LW***	***1146***
225/65-18	***ES83***	***QV735***	***QV575***	***1046***	***2319LW***	***1146***
235/65-18	***ES83***	***QV735***	***QV575***	***1046***	***2319LW***	***1146***
245/30-19	***ES78***	***QV331***	***QV555***	***1038***	***1545Q***	***1138***
255/30-19	***ES73***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
265/30-19	-	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
275/30-19	***ES79***	***QV343***	***QV571***	***1042***	***1553Q***	***1142***
285/30-19	***ES80***	***QV729***	***QV571***	***1673***	***2319LW***	-
295/30-19	***ES80***	***QV735***	***QV563***	***1673***	***2317LW***	-
325/30-19	***ES80***	-	-	-	-	-
215/35-19	-	***QV331***	***QV547***	***1034***	***1542Q***	***1134***
225/35-19	***ES79***	***QV323***	***QV539***	***1038***	***1545Q***	***1138***
235/35-19	***ES79***	***QV323***	***QV539***	***1038***	***1547Q***	***1138***
245/35-19	***ES75***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
255/35-19	***ES79***	***QV343***	***QV555***	***1042***	***1550Q***	***1142***
265/35-19	***ES80***	***QV339***	***QV563***	***1046***	***1555Q***	***1146***
275/35-19	***ES80***	***QV343***	***QV555***	***1046***	***1555Q***	***1146***
285/35-19	***ES80***	***QV343***	***QV563***	***1046***	-	***1146***
295/35-19	***ES80***	-	***QV563***	-	-	-
225/40-19	***ES79***	***QV339***	***QV555***	***1038***	***1545Q***	***1138***
235/40-19	***ES80***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
245/40-19	***ES75***	***QV339***	***QV555***	***1042***	***1553Q***	***1142***
255/40-19	***ES75***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
275/40-19	***ES80***	***QV729***	***QV563***	***1046***	***2319LW***	***1146***
285/40-19	***ES83***	***QV343***	***QV571***	-	-	-
225/45-19	***ES74***	***QV339***	***QV563***	***1042***	***1550Q***	***1142***
235/45-19	***ES74***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
245/45-19	***ES80***	***QV343***	***QV563***	***1046***	***1555Q***	***1146***
255/45-19	***ES83***	***QV729***	***QV563***	***1046***	***2319LW***	***1146***
195/50-19	***ES74***	***QV335***	***QV555***	***1034***	***1545Q***	***1134***
225/50-19	***ES80***	***QV339***	***QV563***	***1042***	***1553Q***	***1142***
235/50-19	***ES83***	***QV729***	***QV571***	***1046***	***1555Q***	***1146***
235/55-19	***ES82***	***QV735***	***QV575***	***1046***	***2319LW***	***1146***
275/55-19	***ES84***	***QV747***	***QV579***	***1679***	***2327LW***	2228QC
175/60-19	***ES80***	***QV335***	-	***1034***	-	***1134***
155/70-19	***ES80***	-	-	-	-	-
225/30-20	***ES73***	***QV335***	***QV555***	***1038***	***1545Q***	***1138***
235/30-20	***ES79***	***QV339***	***QV555***	***1038***	***1547Q***	***1138***
245/30-20	***ES79***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

TIRE SIZE	EASYSOX *ES* Page 12	VOLT CABLE *QV300* Page 15	HIGH VOLT CABLE *QV500* Page 15	COBRA CABLE *1000* Page 14	DIAMOND BACK *1500Q* Page 16	TYPE "PL" LINK CHAIN *1100* Page 14
255/30-20	***ES79***	***QV343***	***QV563***	***1042***	***1553Q***	***1142***
265/30-20	***ES80***	-	-	-	-	-
275/30-20	***ES80***	***QV729***	***QV571***	***1046***	***1555Q***	***1146***
285/30-20	***ES80***	***QV729***	***QV563***	-	-	-
295/30-20	***ES80***	***QV729***	***QV563***	***1673***	***2319LW***	-
225/35-20	***ES79***	***QV343***	***QV563***	***1038***	***1550Q***	***1138***
235/35-20	***ES80***	***QV339***	***QV555***	***1042***	***1550Q***	***1142***
245/35-20	***ES75***	***QV339***	***QV555***	***1042***	***1550Q***	***1146***
255/35-20	***ES75***	***QV343***	***QV563***	***1042***	***1555Q***	***1142***
265/35-20	***ES75***	***QV343***	***QV563***	***1046***	***1555Q***	***1146***
275/35-20	***ES80***	***QV729***	***QV563***	***1046***	***2319LW***	***1146***
285/35-20	***ES83***	***QV735***	***QV563***	-	-	-
315/35-20	***ES84***	***QV751***	***QV579***	-	***2321LW***	-
245/40-20	***ES80***	***QV343***	***QV563***	***1046***	***1555Q***	***1146***
255/40-20	***ES83***	***QV729***	***QV563***	***1661***	-	-
235/45-20	-	***QV343***	***QV571***	***1665***	***1555Q***	***1146***
195/50-20	***ES80***	-	-	-	-	-
235/50-20	***ES82***	***QV343***	***QV571***	***1042***	***1555Q***	***1142***
175/55-20	***ES80***	***QV335***	-	***1034***	-	***1134***
275/30-21	-	-	***QV563***	-	-	-
245/35-21	***ES75***	***QV343***	***QV563***	***1046***	-	***1146***
255/35-21	***ES83***	-	-	-	-	-
265/35-21	***ES83***	-	-	-	-	-
265/40-21	***ES83***	***QV741***	***QV579***	-	-	-
245/45-21	***ES83***	***QV735***	***QV575***	***1669***	-	-
275/45-21	***ES84***	***QV747***	***QV583***	-	-	-
235/30-22	***ES80***	***QV729***	***QV571***	***1046***	***1555Q***	***1146***
245/30-22	***ES80***	***QV729***	***QV571***	***1046***	-	***1146***
265/30-22	***ES83***	***QV735***	***QV575***	-	-	-
275/35-22	***ES83***	***QV741***	***QV579***	-	-	-
325/35-22	***ES85***	-	-	-	-	-

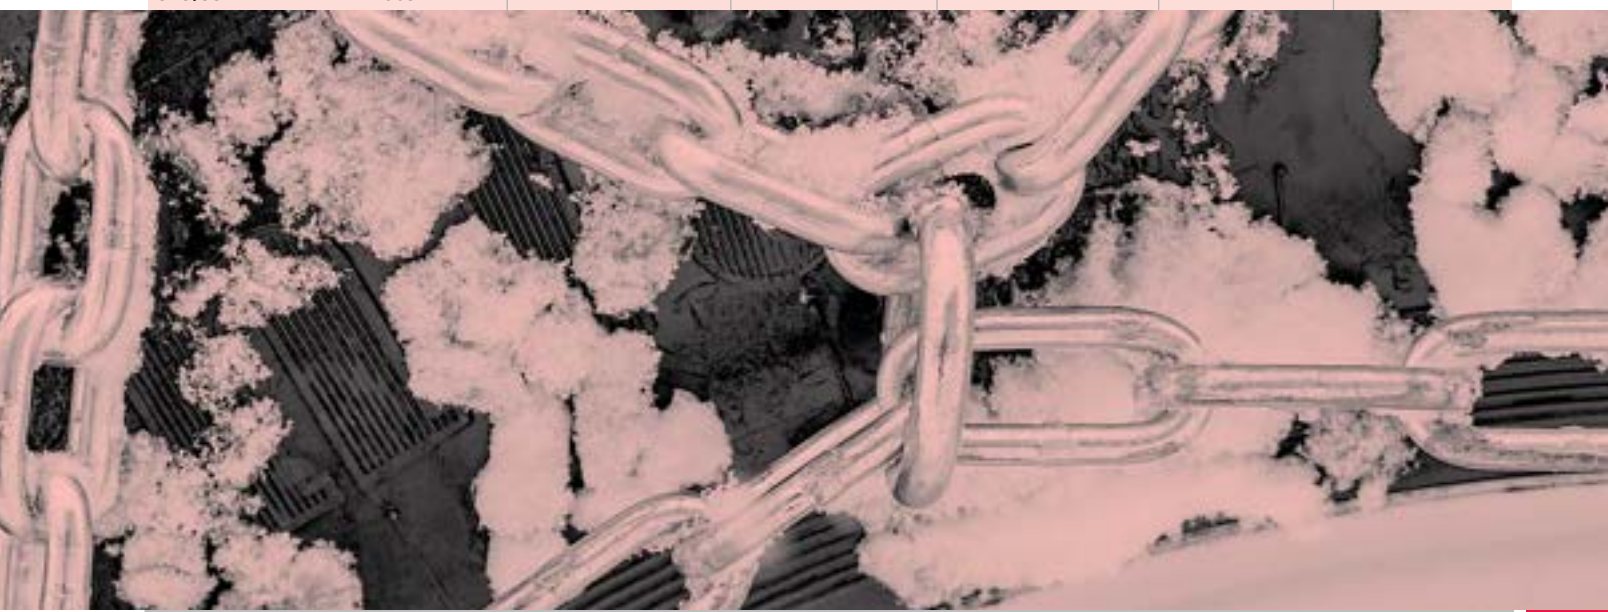

EASYSOX PASSENGER

EasySox provide great traction on snow and ice!
Advanced technology fabric traction device.
(See instructions and disclaimers on next page)

STOCK NUMBER	WEIGHT PER PAIR (LBS)
ES70	1
ES71	1.8
ES72	2
ES73	2.2
ES74	3.5
ES75	2.1
ES76	2.2
ES77	2.6
ES78	2.2
ES79	2.3
ES80	2.4
ES81	2

APPROVED FOR USE IN

ALL 50 STATES





STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton



Quick and Easy to Install

EASYSOX

SCAN CODE
FOR INSTALLATION VIDEO

EMERGENCY TRACTION DEVICE

PASSENGER / LIGHT TRUCK & SUV

THE TRUE ALTERNATIVE TO TRADITIONAL TRACTION

LIGHT WEIGHT: EASIER TO HANDLE AND STORE!

LESS BULKY: CAN BE APPLIED TO VEHICLES WITH EXTREMELY LOW CLEARANCE!

LOWER RISK: OF VEHICLE DAMAGE, NO METAL OR PLASTIC COMPONENTS THAT CAN STRIKE VEHICLE OR SCUFF WHEELS!

APPROVED FOR USE IN:

ALL 50 STATES

ÖNORM EN 1662-1:2020

ISSE

ISO 9001

EASY AS...



QUALITY CHAIN CORP

For more info please visit our website:
WWW.EASYSOX.COM

GO GREEN
ECO-FRIENDLY TRACTION ALTERNATIVE

EASYSOX are an environmentally friendly traction alternative. No steelmaking or zinc plating involved in the manufacturing process.

Arch.Ing ZT
Dipl.-Ing. Dr. Moschik ZT GmbH
Accreditation body #288
Device tested and certified according
EN 16662-1
Reg.Nr: 288-20637

DISCLAIMER:
EASYSOX ARE GUARANTEED FOR WORKMANSHIP AND MATERIAL ONLY.
THE CONSUMER ACCEPTS ALL LIABILITY IN USE OF THIS PRODUCT. ALL SALES ARE FINAL.

COBRA™ CABLE

For Traction That Bites!

Low profile carbon steel rollers allow increased tire-to-road contact, resulting in better stability as well as considerable reduction in noise and vibration.

LOW CLEARANCE CROSS CHAIN! .344" DIAMETER ROLLERS





⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN WIDTH (INCHES)	OVERALL LENGTH (INCHES)
1014	5	10.4"	56.8"
1018	5		61.8"
1022	6		66.8"
1026	6	11.6"	61.8"
1030	6		66.8"
1034	6	12.8"	
1038	7		71.8"
1042	8	14.0"	
1046	9		76.0"

SAE INTERNATIONAL CLASS



STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0212
SEE PAGES 106-107 FOR DETAILS

PASSENGER LIMITED LINK

The Passenger Limited series are carbon steel link chains designed for use on cars with minimal clearance, using original equipment size tires with highway tread.



SAE INTERNATIONAL CLASS



11/64" - 4.5 MM

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN
1114	9	5414	1134	12	5420
1118	10		1138	13	
1122	11		1142	13	5422
1126	11	5419	1146	14	
1130	11				

Packed 1 Pair Per Bag

VOLT

PREMIUM PASSENGER

Volt cable chains provide better traction and a smoother ride than ladder style cables and chains due to the diagonal cross cable design; which keeps the cable in nearly constant contact with the road. Volt's alloy steel rollers make it a longer lasting option than the carbon steel rollers on the entry level Cobra cable.

POPULAR FOR EASY INSTALLATION

RUBBER TIGHTENERS INCLUDED

⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	BUNGEE
QV311	9	QV1332	QV1172
QV315	10	QV1334	
QV319	10	QV1336	
QV323	10	QV1338	
QV327	10		
QV329	10		
QV331	10	QV1340	
QV335	10	QV1342	
QV339	11		QV1174
QV343	11	QV1344	





STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton

HIGH VOLT

PREMIUM EMERGENCY VEHICLES
(POLICE, FIRE & AMBULANCE)

High Volt cable chains are engineered to meet the high-performance needs of emergency vehicles. Larger alloy rollers and high strength aircraft cable provide maximum traction and durability.
Easy installation with no rubber tighteners needed.

⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN
QV539	11	QV9380
QV547	12	QV9384
QV555	12	QV9388
QV563	12	
QV571	12	QV9390
QV575	13	QV9394
QV579	13	
QV583	13	QV9398





STANDARD PACKAGING
Packed 1 Pair Per Box
4 Pair Per Master Carton

DIAMOND BACK PASSENGER

3.7 MM

European Hoop Style Chain
Made of alloy steel with square links in a diamond pattern for excellent traction, a smooth ride, and long wear.

POPULAR FOR EASY INSTALLATION

⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN
1505Q	9	1572
1510Q	9	1574
1515Q	9	1576
1520Q	9	
1525Q	10	1578
1530Q	10	1582
1535Q	10	1584
1540Q	11	1588
1542Q	11	
1545Q	11	
1547Q	13	1592
1550Q	13	1594
1553Q	13	1596
1555Q	13	





INSIDE FASTENER



STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton

PARTS AND PIECES


STOCK NUMBER	APPLICATION	STANDARD PACKAGE	WEIGHT PER PKG (LBS)
F-3	1500Q & 2300LW / 2500Q Quick Hook	10	1
L-3	1500Q & 2300LW / 2500Q Lock System		1
R-1	1500Q Rubber End		5
R-2	2500Q & 2300LW Rubber End		5
PK-1	1500Q & 2300LW Repair Kit		1
PK-2	2500Q Repair Kit		1
S-1	1500Q & 2300LW / 2500Q Short Hook		1


F-3


L-3


R-1 & R-2


PK-1 & PK-2


S-1

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408


LIGHT TRUCK/SUV
TUNDRA
EASYSOX

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT LT CABLE *QV700*	HIGH VOLT CABLE *QV500*	COBRA JR CABLE *1600*	DIAMOND BACK LT *2500Q*	DIAMOND LIGHT *2300LW*	HIGHWAY SINGLE *2200QC* *3200QC*	V-BAR SINGLE *2800QC* *3800QC*	SQ. LINK SINGLE *2100SLC* *3100SLC*	NORDIC STUDDED *S200* *S300*	MUD SERVICE *2400HH* *3400HH*
	Page 26	Page 27	Page 27	Page 26	Page 28	Page 29	Pgs. 30 & 33	Pgs. 30 & 33	Pgs. 31 & 34	Page 32	Pgs. 32-33
7.50-16	-	***QV741***	***QV579***	***1669***	2519Q	***2319LW***	2221QC	2821QC	2121SLC	S315	2437HH
7-17.5	-	***QV343***	***QV571***	-	-	-	2211QC	2811QC	-	-	-
8-19.5	-	***QV747***	***QV579***	***1663***	2514Q	***2314LW***	2221QC	2821QC	2121SLC	-	2439HH
185-14	***ES73***	***QV327***	***QV539***	***1030***	-	-	2209QC	2809QC	2109SLC	-	-
225/60-14	***ES78***	***QV327***	***QV547***	-	2519Q	***2319LW***	2209QC	2809QC	2109SLC	-	-
195/75-14	***ES79***	***QV327***	***QV539***	***1030***	***1535Q***	-	2209QC	2809QC	2109SLC	-	-
215/75-14	***ES75***	***QV335***	***QV555***	***1661***	***1545Q***	-	2216QC	2816QC	2116SLC	-	-
275/60-15	***ES83***	***QV729***	***QV563***	***1661***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2437HH
225/70-15	***ES75***	***QV343***	***QV563***	***1661***	2515Q	***2315LW***	2216QC	2816QC	2116SLC	-	2433HH
235/70-15	***ES83***	***QV729***	***QV563***	***1661***	2517Q	***2317LW***	2216QC	2816QC	2116SLC	-	2435HH
245/70-15	-	***QV729***	***QV563***	***1661***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2437HH
255/70-15	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
265/70-15	***ES83***	***QV735***	***QV575***	***1665***	2519Q	***2319LW***	2221QC	2821QC	2121SLC	-	2437HH
285/70-15	-	***QV747***	***QV579***	***1661***	2529Q	***2329LW***	2219QC	2819QC	2119SLC	-	-
295/70-15	-	***QV751***	***QV579***	-	-	-	-	-	-	-	-
215/75-15	***ES80***	***QV339***	***QV563***	***1661***	2515Q	***2315LW***	2216QC	2816QC	2116SLC	-	2433HH
225/75-15	***ES80***	***QV343***	***QV563***	***1661***	2515Q	***2315LW***	2216QC	2816QC	2116SLC	-	2435HH
235/75-15	***ES82***	***QV729***	***QV571***	***1661***	2517Q	***2317LW***	2219QC	2819QC	2119SLC	-	2435HH
245/75-15	***ES83***	***QV729***	***QV575***	***1669***	2521Q	***2321LW***	2229QC	2829QC	2129SLC	-	2437HH
255/75-15	***ES83***	***QV735***	***QV575***	***1669***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	2439HH
265/75-15	***ES83***	***QV741***	***QV575***	***1669***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	S315	2437HH
275/75-15	***ES84***	***QV747***	***QV575***	***1675***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	-	3428HH
285/75-15	-	***QV747***	***QV579***	-	-	-	-	-	-	-	-
225/50-16	***ES78***	***QV335***	***QV547***	***1034***	***1547Q***	-	2209QC	2809QC	2109SLC	-	-
215/55-16	***ES73***	***QV331***	***QV547***	-	***1545Q***	-	-	-	-	-	-
235/60-16	***ES75***	***QV339***	***QV563***	***1042***	***1550Q***	***2315LW***	***1142***	-	-	-	-
255/60-16	***ES83***	***QV729***	***QV555***	***1665***	2517Q	***2317LW***	2229QC	2829QC	2129SLC	-	-
265/60-16	-	***QV729***	***QV571***	-	-	-	3210QC	3810QC	3110SLC	-	3410HH
275/60-16	***ES83***	***QV741***	***QV575***	***1669***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	-	2439HH
285/60-16	-	***QV735***	***QV579***	***1673***	-	-	2228QC	2828QC	2128SLC	-	2439HH
235/65-16	***ES80***	***QV729***	***QV563***	***1665***	2517Q	***2317LW***	2216QC	2816QC	2116SLC	-	-
245/65-16	-	***QV729***	***QV563***	***1661***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
255/65-16	***ES82***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2435HH
265/65-16	***ES83***	***QV735***	***QV575***	***1661***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2437HH
275/65-16	***ES83***	***QV741***	***QV579***	***1673***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	-	-
285/65-16	***ES84***	***QV747***	***QV579***	-	-	-	-	-	-	-	-
215/70-16	***ES80***	***QV343***	***QV563***	***1661***	2515Q	***2315LW***	2216QC	2816QC	2116SLC	-	2435HH
225/70-16	***ES82***	***QV343***	***QV571***	***1661***	2517Q	***2317LW***	2219QC	2819QC	2119SLC	-	2435HH
235/70-16	***ES82***	***QV729***	***QV571***	***1665***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2435HH
245/70-16	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2435HH
255/70-16	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	2221QC	2821QC	2121SLC	-	2437HH
265/70-16	***ES83***	***QV741***	***QV579***	***1669***	2529Q	***2329LW***	3210QC	3810QC	3110SLC	S320	3410HH
275/70-16	***ES84***	***QV747***	***QV579***	***1675***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	S320	3428HH
285/70-16	***ES84***	***QV751***	***QV579***	***1675***	-	-	3229QC	3829QC	3129SLC	S320	3429HH
305/70-16	***ES85***	***QV757***	***QV583***	***1678***	2536Q	***2335LW***	3228QC	3828QC	3128SLC	S295	2440HH
315/70-16	***ES188***	***QV751***	QV841	-	-	-	3231QC	3831QC	3131SLC	S296	3431HH
205/75-16	***ES80***	***QV343***	***QV563***	***1661***	***1550Q***	-	2216QC	2816QC	2116SLC	-	2433HH

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT LT CABLE *QV700*	HIGH VOLT CABLE *QV500*	COBRA JR CABLE *1600*	DIAMOND BACK LT *2500Q*	DIAMOND LIGHT *2300LW*	HIGHWAY SINGLE *2200QC 3200QC*	V-BAR SINGLE *2800QC 3800QC*	SQ. LINK SINGLE *2100SLC 3100SLC*	NORDIC STUDDED *S200 S300*	MUD SERVICE *2400HH 3400HH*
	Page 26	Page 27	Page 27	Page 26	Page 28	Page 29	Pgs. 30 & 33	Pgs. 30 & 33	Pgs. 31 & 34	Page 32	Pgs. 32-33
215/75-16	***ES82***	***QV729***	***QV571***	***1669***	2515Q	***2315LW***	2216QC	2816QC	2116SLC	-	-
225/75-16	***ES82***	***QV729***	***QV571***	***1665***	2517Q	***2317LW***	2219QC	2819QC	2119SLC	S315	2435HH
235/75-16	***ES83***	***QV735***	***QV575***	***1665***	2519Q	***2319LW***	2219QC	2819QC	2119SLC	S315	2435HH
245/75-16	***ES83***	***QV741***	***QV575***	***1669***	2519Q	***2319LW***	2221QC	2821QC	2121SLC	S315	2437HH
255/75-16	-	***QV747***	***QV575***	-	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S315	2439HH
265/75-16	***ES84***	***QV747***	***QV579***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S320	2439HH
275/75-16	***ES85***	***QV747***	***QV579***	-	-	-	3228QC	3828QC	3128SLC	-	2439HH
285/75-16	***ES85***	***QV751***	***QV583***	***1678***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S295	2440HH
295/75-16	***ES85***	***QV757***	-	***1678***	2521Q	***2321LW***	3229QC	3829QC	3129SLC	S296	2440HH
315/75-16	***ES195***	***QV761***	QV853	-	2536Q	***2337LW***	3231QC	3831QC	3131SLC	S296	2441HH
205/80-16	***ES82***	***QV343***	***QV571***	***1661***	-	-	2229QC	2829QC	2129SLC	-	-
215/80-16	-	***QV729***	***QV575***	-	-	-	2219QC	2819QC	2119SLC	-	2435HH
235/80-16	***ES83***	***QV741***	***QV575***	***1669***	2519Q	***2319LW***	2219QC	2819QC	2119SLC	S320	-
265/80-16	-	***QV747***	***QV583***	-	-	-	-	-	-	-	-
215/85-16	***ES83***	***QV729***	***QV575***	***1665***	2519Q	***2319LW***	2219QC	2819QC	2119SLC	S315	2435HH
225/85-16	-	***QV735***	***QV575***	***1669***	2517Q	***2317LW***	2221QC	2821QC	2121SLC	S315	2437HH
235/85-16	***ES84***	***QV741***	***QV579***	***1669***	2521Q	***2321LW***	2221QC	2821QC	2121SLC	S320	2437HH
245/85-16	***ES84***	***QV747***	***QV579***	***1663***	-	-	3228QC	3828QC	3128SLC	S322	2439HH
255/85-16	***ES85***	***QV751***	***QV583***	***1675***	2514Q	***2314LW***	3228QC	3828QC	3128SLC	S322	2439HH
265/85-16	***ES85***	-	***QV583***	***1675***	2519Q	***2319LW***	3228QC	3828QC	3128SLC	S322	2439HH
275/85-16	***ES195***	-	-	***1675***	-	-	3228QC	3828QC	3128SLC	S295	3428HH
245/45-17	***ES79***	***QV343***	***QV555***	***1042***	***1547Q***	-	***1138***	-	-	-	-
235/50-17	***ES79***	***QV339***	***QV555***	***1042***	***1550Q***	-	***1142***	-	-	-	-
275/50-17	-	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	-	3410HH
235/55-17	***ES75***	***QV343***	***QV563***	***1661***	***1553Q***	***2315LW***	***1142***	-	-	-	-
255/55-17	***ES83***	***QV729***	***QV563***	***1673***	2517Q	***2317LW***	2219QC	2819QC	2119SLC	S315	-
265/55-17	-	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	S315	3410HH
275/55-17	-	***QV741***	***QV575***	***1673***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	S320	3410HH
235/60-17	***ES80***	***QV343***	***QV563***	***1665***	***1555Q***	***2317LW***	***1142***	-	-	S315	-
245/60-17	***ES83***	***QV729***	***QV563***	***1665***	2517Q	***2317LW***	2229QC	2829QC	2129SLC	S315	-
255/60-17	***ES83***	***QV735***	***QV571***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2435HH
265/60-17	***ES83***	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	S320	3410HH
275/60-17	***ES83***	***QV741***	***QV579***	***1675***	2529Q	***2329LW***	2228QC	2828QC	2128SLC	S320	3427HH
285/60-17	***ES84***	***QV747***	***QV579***	***1675***	2527Q	***2327LW***	3228QC	3828QC	3128SLC	S295	2439HH
305/60-17	-	-	-	-	-	-	3235QC	3835QC	3135SLC	S296	3435HH
225/65-17	***ES82***	***QV343***	***QV571***	***1665***	2517Q	***2317LW***	2216QC	2816QC	2116SLC	-	-
235/65-17	***ES82***	***QV729***	***QV571***	***1665***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2435HH
245/65-17	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2439HH
255/65-17	***ES83***	***QV735***	***QV575***	***1663***	2519Q	***2321LW***	3210QC	3810QC	3110SLC	S320	2439HH
265/65-17	***ES83***	***QV741***	***QV579***	***1663***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S320	2439HH
275/65-17	***ES84***	***QV747***	***QV579***	***1663***	2514Q	***2314LW***	2228QC	2828QC	2128SLC	S320	2439HH
285/65-17	***ES84***	***QV747***	***QV583***	***1678***	2514Q	***2314LW***	3227QC	3827QC	3127SLC	-	3427HH
305/65-17	-	***QV751***	***QV583***	***1680***	2536Q	***2335LW***	3229QC	3829QC	3129SLC	S295	3429HH
225/70-17	***ES82***	***QV729***	***QV575***	***1665***	2517Q	***2317LW***	2219QC	2819QC	2119SLC	-	-
235/70-17	***ES83***	***QV735***	***QV579***	***1665***	2519Q	***2319LW***	2219QC	2819QC	2119SLC	S315	2439HH
245/70-17	***ES84***	***QV741***	***QV575***	***1673***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S315	3410HH
255/70-17	***ES84***	***QV747***	***QV579***	***1663***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S320	2439HH

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES* Page 26	VOLT LT CABLE *QV700* Page 27	HIGH VOLT CABLE *QV500* Page 27	COBRA JR CABLE *1600* Page 26	DIAMOND BACK LT *2500Q* Page 28	DIAMOND LIGHT *2300LW* Page 29	HIGHWAY SINGLE *2200QC 3200QC* Pgs. 30 & 33	V-BAR SINGLE *2800QC 3800QC* Pgs. 30 & 33	SQ. LINK SINGLE *2100SLC 3100SLC* Pgs. 31 & 34	NORDIC STUDDED *S200 S300* Page 32	MUD SERVICE *2400HH 3400HH* Pgs. 32-33
265/70-17	***ES84***	***QV747***	***QV579***	***1675***	2521Q	***2314LW***	3228QC	3828QC	3128SLC	S320	2439HH
275/70-17	***ES85***	***QV751***	***QV583***	***1675***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S322	2439HH
285/70-17	***ES85***	***QV753***	***QV583***	***1678***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S295	3428HH
295/70-17	***ES188***	***QV761***	***QV583***	***1678***	2536Q	***2337LW***	3229QC	3829QC	3129SLC	S295	3429HH
305/70-17	***ES85***	***QV761***	QV853	***1678***	2536Q	-	3229QC	3829QC	3129SLC	S296	3429HH
315/70-17	***ES195***	***QV761***	QV853	***1681***	2536Q	-	3231QC	3831QC	3131SLC	S296	3431HH
225/75-17	***ES83***	***QV729***	***QV575***	***1669***	2519Q	***2319LW***	2219QC	2819QC	2119SLC	S315	-
235/75-17	***ES83***	***QV735***	***QV579***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S320	3410HH
245/75-17	***ES84***	***QV741***	***QV579***	***1675***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	S320	2439HH
255/75-17	***ES84***	***QV751***	***QV579***	***1663***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	S320	2439HH
265/75-17	-	***QV751***	***QV583***	***1678***	2521Q	***2321LW***	3228QC	3828QC	3128SLC	S322	-
285/75-17	***ES188***	***QV757***	***QV583***	***1680***	2536Q	-	3229QC	3829QC	3129SLC	S295	3429HH
235/80-17	***ES84***	***QV747***	***QV579***	***1669***	2519Q	***2319LW***	2221QC	2821QC	2121SLC	S320	2437HH
255/80-17	***ES85***	QV835	***QV583***	***1675***	2514Q	***2314LW***	2237QC	2837QC	2137SLC	-	2437HH
275/80-17	***ES195***	-	-	***1680***	-	-	3231QC	3831QC	3131SLC	S295	3431HH
245/85-17	-	-	-	***1675***	-	-	2228QC	2828QC	2128SLC	S322	-
215/70-17.5	***ES82***	***QV729***	***QV575***	***1673***	2515Q	***2315LW***	2219QC	2819QC	2119SLC	S315	2435HH
225/70-17.5	-	-	-	***1663***	2517Q	***2317LW***	2214QC	2814QC	2114SLC	S315	2439HH
235/70-17.5	***ES83***	***QV735***	***QV579***	-	-	-	2221QC	2821QC	2121SLC	-	-
245/70-17.5	***ES83***	***QV741***	***QV579***	***1675***	2521Q	***2321LW***	3228QC	3828QC	3128SLC	S320	-
275/70-17.5	-	-	-	-	2519Q	***2319LW***	3228QC	3828QC	3128SLC	S295	2440HH
205/75-17.5	-	***QV729***	***QV575***	***1661***	2529Q	***2329LW***	-	-	-	-	-
215/75-17.5	***ES83***	***QV729***	***QV575***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S315	2437HH
225/75-17.5	***ES83***	***QV735***	***QV575***	***1665***	2521Q	***2321LW***	-	-	-	-	-
235/75-17.5	***ES84***	***QV741***	***QV579***	***1665***	2514Q	***2314LW***	3228QC	3828QC	3128SLC	S320	2439HH
245/75-17.5	***ES84***	***QV741***	***QV579***	-	-	-	3228QC	3828QC	3128SLC	-	2439HH
265/45-18	-	***QV729***	***QV571***	-	-	-	-	-	-	-	-
275/45-18	-	***QV735***	***QV563***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	-
285/45-18	-	***QV735***	***QV563***	-	-	-	-	-	-	-	-
295/45-18	***ES83***	***QV735***	***QV575***	***1673***	2529Q	***2329LW***	3210QC	3810QC	3110SLC	-	2439HH
285/50-18	***ES83***	***QV735***	***QV575***	***1675***	2529Q	***2329LW***	2228QC	2828QC	2128SLC	-	2439HH
225/55-18	***ES80***	***QV729***	***QV563***	***1661***	2517Q	***2317LW***	2229QC	2829QC	2129SLC	-	2435HH
235/55-18	***ES80***	***QV729***	***QV563***	***1673***	2517Q	***2317LW***	2229QC	2829QC	2129SLC	-	-
245/55-18	***ES83***	***QV735***	***QV571***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	-
255/55-18	***ES82***	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S320	2435HH
265/55-18	-	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	-	3410HH
275/55-18	***ES83***	***QV741***	***QV579***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S322	3410HH
285/55-18	-	***QV747***	-	***1679***	2527Q	***2327LW***	3210QC	3810QC	3110SLC	S295	3410HH
225/60-18	***ES82***	***QV729***	***QV571***	***1661***	***1555Q***	-	2229QC	2829QC	2129SLC	-	2435HH
235/60-18	***ES82***	***QV729***	***QV571***	***1669***	2517Q	***2317LW***	2229QC	2829QC	2129SLC	S320	2439HH
245/60-18	***ES83***	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S320	2439HH
255/60-18	***ES83***	***QV741***	***QV579***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S320	3410HH
265/60-18	***ES83***	***QV741***	***QV579***	***1675***	2521Q	***2321LW***	3228QC	3828QC	3128SLC	S320	-
275/60-18	***ES84***	***QV747***	***QV579***	***1675***	2527Q	***2327LW***	3228QC	3828QC	3128SLC	S320	2439HH
285/60-18	***ES84***	***QV751***	***QV579***	***1675***	2527Q	***2327LW***	3228QC	3828QC	3128SLC	S295	2439HH
295/60-18	-	***QV751***	***QV579***	-	-	-	3227QC	3827QC	3127SLC	-	3427HH
305/60-18	***ES85***	***QV753***	QV841	***1681***	2536Q	-	3231QC	3831QC	3131SLC	S296	3431HH

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT LT CABLE *QV700*	HIGH VOLT CABLE *QV500*	COBRA JR CABLE *1600*	DIAMOND BACK LT *2500Q*	DIAMOND LIGHT *2300LW*	HIGHWAY SINGLE *2200QC 3200QC*	V-BAR SINGLE *2800QC 3800QC*	SQ. LINK SINGLE *2100SLC 3100SLC*	NORDIC STUDDED *S200 S300*	MUD SERVICE *2400HH 3400HH*
	Page 26	Page 27	Page 27	Page 26	Page 28	Page 29	Pgs. 30 & 33	Pgs. 30 & 33	Pgs. 31 & 34	Page 32	Pgs. 32-33
325/60-18	***ES85***	***QV753***	QV853	-	2536Q	-	3231QC	3831QC	3131SLC	S296	3431HH
225/65-18	***ES83***	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	-
235/65-18	***ES83***	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S320	2439HH
255/65-18	***ES84***	***QV747***	***QV579***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	S320	2439HH
265/65-18	***ES84***	***QV747***	***QV579***	***1663***	2527Q	***2327LW***	3228QC	3828QC	3128SLC	S320	2439HH
275/65-18	***ES85***	***QV751***	***QV583***	***1675***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S320	2439HH
285/65-18	***ES85***	***QV751***	***QV583***	***1678***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S295	3429HH
295/65-18	***ES188***	QV841	-	***1680***	2536Q	-	3229QC	3829QC	3129SLC	-	3429HH
305/65-18	***ES188***	-	-	***1681***	2536Q	-	3231QC	3831QC	3131SLC	S296	3431HH
325/65-18	***ES199***	***QV761***	QV853	***1681***	-	-	3231QC	3831QC	3131SLC	S298	3431HH
355/65-18	-	QV881	-	-	-	-	3255QC	3855QC	3155SLC	-	3455HH
225/70-18	***ES83***	***QV735***	***QV579***	***1663***	-	-	2221QC	2821QC	2121SLC	S320	2435HH
235/70-18	-	***QV741***	***QV579***	-	-	-	2221QC	2821QC	2121SLC	-	2437HH
245/70-18	-	***QV747***	***QV579***	-	-	-	2228QC	2828QC	2128SLC	-	-
255/70-18	***ES84***	***QV747***	***QV579***	***1663***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	S320	2439HH
265/70-18	***ES85***	***QV751***	***QV583***	***1678***	2533Q	***2328LW***	2228QC	2828QC	2128SLC	S322	2439HH
275/70-18	***ES85***	***QV753***	***QV583***	***1680***	2536Q	-	3228QC	3828QC	3128SLC	S322	3428HH
285/70-18	***ES85***	***QV757***	***QV583***	***1681***	2536Q	-	3229QC	3829QC	3129SLC	S295	3431HH
295/70-18	***ES195***	QV835	***QV583***	***1681***	2536Q	-	3231QC	3831QC	3131SLC	S296	3431HH
305/70-18	***ES195***	QV859	-	-	2539Q	-	3231QC	3831QC	3131SLC	S296	3431HH
245/75-18	***ES84***	***QV751***	***QV583***	-	-	-	2228QC	2828QC	2128SLC	-	-
265/75-18	***ES85***	QV837	***QV583***	***1679***	-	-	3229QC	3829QC	3129SLC	S322	3429HH
285/75-18	***ES195***	***QV761***	-	***1681***	2536Q	***2337LW***	3231QC	3831QC	3131SLC	S296	3431HH
235/80-18	-	-	-	***1675***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	S322	2439HH
275/45-19	***ES83***	***QV741***	***QV575***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S320	-
285/45-19	***ES83***	***QV735***	***QV575***	***1663***	2529Q	***2329LW***	3210QC	3810QC	3110SLC	S322	3410HH
225/50-19	***ES80***	***QV339***	***QV563***	***1042***	***1553Q***	-	***1142***	-	-	-	-
235/50-19	***ES83***	***QV729***	***QV571***	***1673***	-	***2319LW***	-	-	-	-	-
245/50-19	***ES83***	***QV729***	***QV571***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
255/50-19	***ES82***	***QV735***	***QV575***	***1669***	2529Q	***2329LW***	2229QC	2829QC	2129SLC	-	2435HH
265/50-19	***ES83***	***QV741***	***QV575***	***1675***	2529Q	***2329LW***	3210QC	3810QC	3110SLC	-	2437HH
275/50-19	***ES83***	***QV735***	***QV579***	-	-	-	-	-	-	-	-
225/55-19	***ES82***	***QV729***	***QV571***	***1673***	-	***2319LW***	-	-	-	-	-
235/55-19	***ES82***	***QV735***	***QV575***	***1669***	-	***2319LW***	-	-	-	-	-
245/55-19	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	-	3410HH
255/55-19	***ES83***	***QV735***	***QV579***	***1663***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
265/55-19	***ES83***	***QV741***	-	-	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
275/55-19	***ES84***	***QV747***	***QV579***	***1679***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	-
285/55-19	-	***QV747***	***QV579***	-	-	-	2228QC	2828QC	2128SLC	-	-
255/60-19	***ES84***	***QV747***	***QV579***	***1663***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	-	2437HH
285/60-19	***ES85***	-	***QV583***	-	-	-	3229QC	3829QC	3129SLC	-	3429HH
235/65-19	***ES83***	***QV741***	-	-	-	-	2228QC	2828QC	2128SLC	-	2439HH
255/65-19	***ES84***	***QV747***	***QV579***	***1663***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	2439HH
275/65-19	***ES85***	-	-	-	-	-	3228QC	3828QC	3128SLC	-	-
225/70-19.5	***ES84***	***QV747***	***QV579***	***1663***	2521Q	***2321LW***	2221QC	2821QC	2121SLC	S320	2437HH
235/70-19.5	***ES85***	***QV747***	***QV579***	-	-	-	-	-	-	-	-
245/70-19.5	***ES188***	***QV751***	***QV583***	***1675***	2514Q	***2314LW***	3228QC	3828QC	3128SLC	S322	2439HH

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES* Page 26	VOLT LT CABLE *QV700* Page 27	HIGH VOLT CABLE *QV500* Page 27	COBRA JR CABLE *1600* Page 26	DIAMOND BACK LT *2500Q* Page 28	DIAMOND LIGHT *2300LW* Page 29	HIGHWAY SINGLE *2200QC 3200QC* Pgs. 30 & 33	V-BAR SINGLE *2800QC 3800QC* Pgs. 30 & 33	SQ. LINK SINGLE *2100SLC 3100SLC* Pgs. 31 & 34	NORDIC STUDDED *S200 S300* Page 32	MUD SERVICE *2400HH 3400HH* Pgs. 32-33
265/70-19.5	***ES195***	QV837	-	***1680***	2536Q	-	2237QC	2837QC	2137SLC	S322	2440HH
275/70-19.5	***ES195***	QV837	-	-	-	-	-	-	-	-	-
285/70-19.5	***ES195***	QV853	-	-	2527Q	***2327LW***	2246QC	2846QC	2146SLC	-	-
305/70-19.5	***ES199***	QV869	-	-	2514Q	***2314LW***	2239QC	2839QC	2139SLC	-	-
215/75-19.5	-	***QV747***	***QV579***	-	-	-	-	-	-	-	-
225/75-19.5	***ES85***	***QV747***	***QV579***	***1663***	2521Q	***2321LW***	2214QC	2814QC	2114SLC	S320	2437HH
305/30-20	***ES84***	-	-	-	-	-	3257QC	3857QC	3157SLC	-	-
285/35-20	-	***QV735***	***QV563***	-	-	-	-	-	-	-	-
315/35-20	-	***QV751***	***QV579***	-	2521Q	***2321LW***	-	-	-	-	-
235/40-20	***ES75***	-	-	-	-	-	-	-	-	-	-
255/40-20	***ES83***	***QV729***	***QV563***	-	2521Q	***2321LW***	-	-	-	-	-
265/40-20	***ES83***	***QV729***	***QV571***	-	-	-	-	-	-	-	-
275/40-20	***ES83***	***QV735***	***QV575***	***1663***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
285/40-20	***ES83***	***QV741***	***QV579***	-	-	-	-	-	-	-	-
295/40-20	***ES83***	***QV735***	***QV579***	***1675***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	-	2439HH
305/40-20	***ES84***	-	-	-	-	-	-	-	-	-	-
235/45-20	***ES80***	***QV343***	***QV571***	***1665***	-	***2319LW***	-	-	-	-	-
245/45-20	***ES82***	***QV729***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	S295	-
255/45-20	***ES82***	***QV729***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	-
265/45-20	***ES83***	***QV735***	***QV575***	***1673***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	-	2437HH
275/45-20	***ES83***	***QV741***	***QV579***	***1669***	2521Q	***2321LW***	2229QC	2829QC	2129SLC	S298	2439HH
285/45-20	***ES83***	***QV741***	***QV579***	-	-	-	-	-	-	-	-
295/45-20	***ES84***	***QV747***	***QV579***	***1679***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	2439HH
305/45-20	***ES85***	***QV741***	***QV579***	***1679***	2514Q	***2314LW***	3229QC	3829QC	3129SLC	-	3429HH
235/50-20	***ES82***	***QV343***	***QV571***	***1042***	***1555Q***	-	***1142***	-	-	-	-
245/50-20	***ES83***	***QV735***	***QV575***	***1669***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
255/50-20	***ES84***	***QV741***	***QV579***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
265/50-20	***ES84***	***QV747***	***QV579***	***1675***	2527Q	***2327LW***	3210QC	3810QC	3110SLC	-	3410HH
275/50-20	***ES84***	***QV747***	***QV579***	***1679***	2527Q	-	2228QC	2828QC	2128SLC	S320	-
285/50-20	***ES84***	***QV751***	***QV579***	***1679***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S295	3428HH
295/50-20	-	***QV751***	***QV579***	***1680***	-	-	3228QC	3828QC	3128SLC	-	3428HH
305/50-20	***ES85***	***QV761***	***QV583***	***1681***	2536Q	***2328LW***	3228QC	3828QC	3128SLC	S295	2440HH
325/50-20	-	***QV751***	QV841	-	-	-	3231QC	3831QC	3131SLC	-	3431HH
235/55-20	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	-	2437HH
255/55-20	***ES84***	***QV747***	***QV579***	***1675***	2521Q	***2321LW***	2228QC	2828QC	2128SLC	-	2439HH
275/55-20	***ES85***	***QV751***	***QV583***	***1679***	2533Q	***2328LW***	3228QC	3828QC	3128SLC	S295	3428HH
285/55-20	***ES85***	***QV757***	***QV583***	***1681***	2536Q	-	3228QC	3828QC	3128SLC	-	3428HH
295/55-20	***ES85***	QV837	-	-	-	-	-	-	-	-	-
305/55-20	***ES188***	QV853	-	***1681***	2536Q	-	3231QC	3831QC	3131SLC	S298	3431HH
245/60-20	***ES84***	***QV741***	***QV579***	-	-	-	2228QC	2828QC	2128SLC	-	-
255/60-20	***ES84***	***QV747***	-	***1679***	-	-	2228QC	2828QC	2128SLC	-	-
265/60-20	***ES84***	***QV751***	***QV579***	***1678***	2533Q	-	3228QC	3828QC	3128SLC	S295	3428HH
275/60-20	***ES188***	***QV751***	***QV583***	***1679***	2533Q	-	2228QC	2828QC	2128SLC	S295	2440HH
285/60-20	***ES188***	***QV757***	-	***1679***	2536Q	-	3229QC	3829QC	3129SLC	S296	-
295/60-20	***ES199***	***QV761***	QV853	***1681***	-	-	3229QC	3829QC	3129SLC	-	3429HH
315/60-20	***ES199***	QV859	-	-	-	-	3231QC	3831QC	3131SLC	-	3431HH
325/60-20	***ES199***	QV865	-	-	2539Q	-	3235QC	3835QC	3135SLC	S298	3435HH

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT LT CABLE *QV700*	HIGH VOLT CABLE *QV500*	COBRA JR CABLE *1600*	DIAMOND BACK LT *2500Q*	DIAMOND LIGHT *2300LW*	HIGHWAY SINGLE *2200QC 3200QC*	V-BAR SINGLE *2800QC 3800QC*	SQ. LINK SINGLE *2100SLC 3100SLC*	NORDIC STUDDED *S200 S300*	MUD SERVICE *2400HH 3400HH*
	Page 26	Page 27	Page 27	Page 26	Page 28	Page 29	Pgs. 30 & 33	Pgs. 30 & 33	Pgs. 31 & 34	Page 32	Pgs. 32-33
355/60-20	-	QV869	-	-	-	-	3251QC	3851QC	3151SLC	-	-
265/65-20	***ES85***	***QV757***	***QV583***	-	-	-	3227QC	3827QC	3127SLC	-	3427HH
275/65-20	***ES195***	***QV757***	-	***1681***	2536Q	-	3231QC	3831QC	3131SLC	S296	3431HH
285/65-20	***ES195***	***QV757***	QV859	***1681***	2536Q	-	3231QC	3831QC	3131SLC	-	3431HH
295/65-20	***ES195***	-	QV853	-	-	-	3231QC	3831QC	3131SLC	-	3431HH
225/75-20	-	***QV747***	***QV579***	-	-	-	2228QC	2828QC	2128SLC	-	-
285/30-21	-	***QV735***	***QV563***	-	-	-	-	-	-	-	-
315/30-21	***ES85***	-	-	-	-	-	-	-	-	-	-
275/35-21	***ES83***	-	-	-	-	-	-	-	-	-	-
295/35-21	***ES83***	***QV747***	***QV579***	-	-	-	-	-	-	-	-
315/35-21	***ES85***	-	-	-	-	-	-	-	-	-	-
255/40-21	***ES82***	***QV735***	***QV575***	-	-	-	2229QC	2829QC	2129SLC	-	2435HH
265/40-21	***ES83***	***QV741***	***QV579***	***1673***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
275/40-21	***ES83***	***QV741***	***QV579***	-	-	-	-	-	-	-	-
285/40-21	***ES83***	-	-	-	-	-	-	-	-	-	-
295/40-21	***ES83***	***QV747***	***QV579***	-	-	-	-	-	-	-	-
315/40-21	***ES85***	-	-	-	-	-	-	-	-	-	-
265/45-21	***ES83***	***QV735***	***QV575***	***1675***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
275/45-21	***ES84***	***QV747***	***QV583***	-	2527Q	-	2228QC	2828QC	2128SLC	-	3410HH
285/45-21	***ES84***	***QV751***	***QV583***	-	-	-	-	-	-	-	-
235/50-21	***ES83***	***QV735***	-	-	-	-	-	-	-	-	-
255/50-21	***ES84***	***QV747***	***QV579***	-	-	-	-	-	-	-	-
275/50-21	***ES84***	***QV751***	***QV583***	-	-	-	3229QC	3829QC	3129SLC	-	3429HH
275/55-21	***ES85***	***QV757***	***QV583***	-	-	-	-	-	-	-	-
295/30-22	***ES83***	***QV735***	***QV575***	***1675***	-	-	2228QC	2828QC	2128SLC	-	-
255/35-22	***ES82***	***QV741***	***QV571***	***1673***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
265/35-22	***ES83***	***QV741***	***QV575***	***1673***	2521Q	***2321LW***	2229QC	2829QC	2129SLC	-	-
275/35-22	***ES83***	***QV741***	***QV579***	-	-	-	-	-	-	-	-
285/35-22	***ES83***	***QV747***	***QV579***	***1675***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	-
295/35-22	-	***QV747***	***QV579***	-	-	-	-	-	-	-	-
305/35-22	-	***QV747***	***QV579***	-	-	-	-	-	-	-	-
315/35-22	***ES85***	-	-	-	-	-	-	-	-	-	-
325/35-22	***ES85***	-	-	-	-	-	-	-	-	-	-
245/40-22	***ES83***	***QV735***	***QV575***	-	-	-	-	-	-	-	-
265/40-22	***ES83***	***QV741***	***QV579***	***1663***	2521Q	***2321LW***	3210QC	3810QC	3110SLC	-	3410HH
275/40-22	***ES83***	***QV747***	***QV579***	-	-	-	-	-	-	-	-
285/40-22	***ES84***	***QV741***	***QV579***	***1675***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	-
295/40-22	***ES84***	-	-	-	-	-	-	-	-	-	-
305/40-22	***ES84***	***QV751***	***QV583***	***1679***	-	***2328LW***	2228QC	2828QC	2128SLC	-	3428HH
325/40-22	***ES85***	-	-	***1681***	-	***2328LW***	3228QC	3828QC	3128SLC	-	-
265/45-22	-	***QV735***	***QV575***	***1675***	2527Q	***2327LW***	2228QC	2828QC	2128SLC	-	-
275/45-22	***ES84***	***QV747***	***QV579***	***1679***	2514Q	***2314LW***	-	-	-	-	-
285/45-22	***ES85***	***QV751***	***QV583***	***1679***	2533Q	***2328LW***	2228QC	2828QC	2128SLC	-	-
295/45-22	***ES85***	-	***QV583***	-	-	-	-	-	-	-	-
305/45-22	***ES85***	***QV757***	***QV583***	***1678***	2536Q	***2335LW***	2228QC	2828QC	2128SLC	-	2440HH
265/50-22	***ES85***	***QV751***	-	-	-	-	-	-	-	-	-
275/50-22	***ES85***	***QV757***	***QV583***	-	-	-	-	-	-	-	-

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT LT CABLE *QV700*	HIGH VOLT CABLE *QV500*	COBRA JR CABLE *1600*	DIAMOND BACK LT *2500Q*	DIAMOND LIGHT *2300LW*	HIGHWAY SINGLE *2200QC 3200QC*	V-BAR SINGLE *2800QC 3800QC*	SQ. LINK SINGLE *2100SLC 3100SLC*	NORDIC STUDDED *S200 S300*	MUD SERVICE *2400HH 3400HH*
	Page 26	Page 27	Page 27	Page 26	Page 28	Page 29	Pgs. 30 & 33	Pgs. 30 & 33	Pgs. 31 & 34	Page 32	Pgs. 32-33
285/50-22	***ES188***	***QV757***	***QV583***	***1680***	2536Q	-	3228QC	3828QC	3128SLC	-	3428HH
305/50-22	-	QV859	-	-	-	-	3231QC	3831QC	3131SLC	-	3431HH
325/50-22	***ES199***	-	-	-	2539Q	-	3235QC	3835QC	3135SLC	-	3435HH
285/55-22	-	-	-	-	-	-	3231QC	3831QC	3131SLC	-	3431HH
265/60-22	***ES195***	-	-	***1675***	-	-	-	-	-	-	-
295/30-23	-	***QV741***	***QV579***	-	-	-	-	-	-	-	-
285/40-23	***ES85***	-	-	-	-	-	-	-	-	-	-
305/40-23	-	***QV751***	-	-	-	-	-	-	-	-	-
245/30-24	***ES83***	***QV747***	-	-	-	-	-	-	-	-	-
255/30-24	***ES83***	***QV747***	***QV579***	***1675***	-	-	-	-	-	-	-
275/30-24	***ES83***	***QV751***	***QV583***	***1679***	-	-	-	-	-	-	-
295/30-24	-	-	***QV583***	***1680***	2514Q	***2314LW***	-	-	-	-	-
285/35-24	-	***QV741***	***QV579***	-	-	-	-	-	-	-	-
295/35-24	***ES85***	***QV751***	***QV583***	***1681***	-	-	-	-	-	-	-
305/35-24	***ES85***	***QV757***	***QV583***	***1681***	2536Q	-	3231QC	3831QC	3131SLC	-	3431HH
315/35-24	-	-	***QV583***	-	-	-	-	-	-	-	-
285/40-24	-	***QV757***	***QV583***	***1680***	2536Q	-	3229QC	3829QC	3129SLC	-	3429HH
295/40-24	***ES188***	***QV761***	***QV583***	***1681***	2536Q	***2337LW***	3231QC	3831QC	3131SLC	-	3431HH
305/30-26	***ES188***	-	-	***1681***	-	-	-	-	-	-	-
27x8.50-14	***ES75***	***QV335***	***QV563***	***1661***	***1545Q***	-	2216QC	2816QC	2116SLC	-	-
27x9.50-14	***ES75***	-	-	***1665***	-	-	2216QC	2816QC	2116SLC	-	-
29x9.50-14	***ES82***	***QV729***	***QV571***	***1665***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
29x9.50-15	***ES82***	***QV729***	***QV571***	***1661***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
29x10.50-15	***ES82***	***QV729***	***QV571***	***1661***	2519Q	***2319LW***	3210QC	3810QC	3110SLC	S315	3410HH
30x9.50-15	***ES83***	***QV735***	***QV575***	***1669***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2435HH
31x9.50-15	-	***QV741***	***QV579***	***1673***	2519Q	***2319LW***	3227QC	3827QC	3127SLC	S315	2437HH
31x10.50-15	***ES84***	***QV741***	***QV575***	***1669***	2529Q	***2329LW***	3210QC	3810QC	3110SLC	S315	3410HH
31x11.50-15	-	***QV747***	***QV579***	***1669***	2529Q	***2329LW***	3227QC	3827QC	3127SLC	S320	3427HH
31x12.50-15	-	-	-	***1675***	2514Q	***2314LW***	3229QC	3829QC	3129SLC	S295	3429HH
32x9.50-15	-	***QV741***	***QV579***	***1669***	2519Q	***2319LW***	3227QC	3827QC	3127SLC	S315	3427HH
32x11.50-15	***ES84***	***QV747***	***QV583***	***1675***	2514Q	***2314LW***	3229QC	3829QC	3129SLC	S320	3429HH
33x9.50-15	-	***QV751***	***QV583***	***1675***	2514Q	***2314LW***	3210QC	3810QC	3110SLC	S320	3410HH
33x10.50-15	-	***QV747***	***QV583***	***1675***	2514Q	***2314LW***	3229QC	3829QC	3129SLC	S320	3429HH
33x12.50-15	***ES188***	***QV757***	-	***1678***	2536Q	***2335LW***	3229QC	3829QC	3129SLC	S295	3429HH
33x13.50-15	***ES188***	-	-	-	-	-	3229QC	3829QC	3129SLC	S298	3429HH
35x10.50-15	***ES195***	-	-	***1679***	2514Q	***2314LW***	3229QC	3829QC	3129SLC	S295	3427HH
35x12.50-15	***ES195***	***QV761***	QV853	***1681***	2539Q	-	3231QC	3831QC	3131SLC	S296	3431HH
35x13.50-15	***ES199***	***QV761***	QV853	***1681***	2539Q	-	3231QC	3831QC	3131SLC	S298	3431HH
35x14.50-15	***ES199***	-	-	-	-	***2337LW***	3235QC	3835QC	3135SLC	S298	3435HH
37x12.50-15	***ES199***	QV859	-	-	2539Q	-	3235QC	3835QC	3135SLC	S298	3435HH
37x14.50-15	-	QV869	-	-	-	-	3251QC	3851QC	3151SLC	-	-
38x12.50-15	-	-	-	-	-	-	3259QC	3859QC	3159SLC	-	-
29x9.50-16	***ES82***	***QV729***	***QV571***	***1661***	2519Q	***2319LW***	2229QC	2829QC	2129SLC	-	2437HH
33x13.50-16	***ES188***	-	-	-	2533Q	-	3229QC	3829QC	3129SLC	S298	3429HH
35x12.50-16	***ES195***	***QV761***	QV853	***1681***	2539Q	-	3231QC	3831QC	3131SLC	S296	3431HH
35x13.50-16	***ES199***	***QV761***	QV853	***1681***	2539Q	-	3231QC	3831QC	3131SLC	S298	3431HH
33x12.50-17	***ES188***	***QV757***	-	***1678***	2536Q	***2335LW***	3229QC	3829QC	3129SLC	S295	3429HH

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT LT CABLE *QV700*	HIGH VOLT CABLE *QV500*	COBRA JR CABLE *1600*	DIAMOND BACK LT *2500Q*	DIAMOND LIGHT *2300LW*	HIGHWAY SINGLE *2200QC* *3200QC*	V-BAR SINGLE *2800QC* *3800QC*	SQ. LINK SINGLE *2100SLC* *3100SLC*	NORDIC STUDDED *S200* *S300*	MUD SERVICE *2400HH* *3400HH*
	Page 26	Page 27	Page 27	Page 26	Page 28	Page 29	Pgs. 30 & 33	Pgs. 30 & 33	Pgs. 31 & 34	Page 32	Pgs. 32-33
35x11.50-17	***ES195***	***QV761***	-	**-**	-	**-**	3231QC	3831QC	3131SLC	S296	3431HH
35x12.50-17	***ES195***	***QV761***	QV853	***1681***	2539Q	**-**	3231QC	3831QC	3131SLC	S296	3431HH
37x12.50-17	***ES199***	QV859	-	-	2539Q	**-**	3235QC	3835QC	3135SLC	S298	3435HH
37x13.50-17	***ES199***	QV869	-	2316	-	**-**	3235QC	3835QC	3135SLC	S298	3435HH
40x13.50-17	**-**	QV881	-	**-**	-	**-**	3254QC	3854QC	3154SLC	-	3455HH
42x14.50-17	**-**	**-**	-	3355	-	**-**	3255QC	3855QC	3155SLC	-	3455HH
33x12.50-18	***ES188***	***QV757***	-	***1678***	2536Q	***2335LW***	3229QC	3829QC	3129SLC	S295	3429HH
35x12.50-18	***ES195***	***QV761***	QV853	***1681***	2539Q	**-**	3231QC	3831QC	3131SLC	S296	3431HH
37x12.50-18	***ES199***	QV859	-	-	2539Q	**-**	3235QC	3835QC	3135SLC	S298	3435HH
37x13.50-18	***ES199***	QV869	-	2316	-	**-**	3235QC	3835QC	3135SLC	S298	3435HH
38x15.50-18	**-**	QV881	-	**-**	-	**-**	-	-	-	-	-
33x12.50-20	***ES188***	***QV757***	-	***1678***	2536Q	***2335LW***	3229QC	3829QC	3129SLC	S295	3429HH
35x12.50-20	***ES195***	***QV761***	QV853	***1681***	2539Q	**-**	3231QC	3831QC	3131SLC	S296	3431HH
35x13.50-20	***ES199***	***QV761***	QV853	***1681***	2539Q	**-**	3231QC	3831QC	3131SLC	S298	3431HH
37x12.50-20	***ES199***	QV859	-	-	2539Q	**-**	3235QC	3835QC	3135SLC	S298	3435HH
37x13.50-20	***ES199***	QV869	-	2316	-	**-**	3235QC	3835QC	3135SLC	-	3435HH
38x14.50-20	**-**	QV881	-	**-**	-	**-**	-	-	-	-	-
40x15.50-20	**-**	QV891	-	3355	-	**-**	3255QC	3855QC	3155SLC	-	3455HH
33x12.50-22	***ES188***	***QV757***	-	***1678***	2536Q	***2335LW***	3229QC	3829QC	3129SLC	S295	3429HH
37x13.50-24	***ES199***	QV869	-	2316	-	**-**	3235QC	3835QC	3135SLC	-	3435HH



COBRA JR™ CABLE

For Traction That Bites!

Low profile carbon steel rollers allow increased tire-to-road contact, resulting in better stability as well as considerable reduction in noise and vibration.

LOW CLEARANCE CROSS CHAIN! .375" DIAMETER ROLLERS



SAE CLASS

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0216
SEE PAGES 106-107 FOR DETAILS



⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	CROSS CHAIN WIDTH (INCHES)	OVERALL LENGTH (INCHES)
1661	10	8818	13.5"	75"
1663	13	8820	14.5"	85"
1665	11			74.5"
1669	12			80"
1673	12	8822	15.5"	75"
1675	14			85"
1678	14			90.5"
1679	14	8823	16.25"	85"
1680	15	8824	17.5"	
1681	16	8826	17"	90"



STANDARD PACKAGING
Packed 1 Pair Per Bag
(Boxes available upon request)

EASYSOX LT/SUV

EASYSOX
THE ALTERNATIVE TO TRADITIONAL TRACTION!

THE ALTERNATIVE TO TRADITIONAL TRACTION

LIGHT WEIGHT: ***EASIER TO HANDLE AND STORE!***

LESS BULKY: ***CAN BE APPLIED TO VEHICLES WITH EXTREMELY LOW CLEARANCE!***

LOWER RISK: ***OF VEHICLE DAMAGE, NO METAL OR PLASTIC COMPONENTS THAT CAN STRIKE VEHICLE OR SCUFF WHEELS!***



STOCK NUMBER	WEIGHT PER PAIR (LBS)
ES82	3
ES83	4.2
ES84	2.7
ES85	4.7



STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton

VOLT LT

PREMIUM LIGHT TRUCK/SUV

Volt cable chains provide better traction and a smoother ride than ladder style cables and chains due to the diagonal cross cable design; which keeps the cable in nearly constant contact with the road. Volt's larger alloy steel rollers make it a longer lasting option than the carbon steel rollers on the entry level Cobra cable.

LOW CLEARANCE CROSS CHAIN! .420" DIAMETER ROLLERS



POPULAR FOR EASY INSTALLATION

RUBBER TIGHTENERS INCLUDED

⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	BUNGEE
QV729	12	QV1742	QV1174
QV735	13		QV1176
QV741	13	QV1744	
QV747	13	QV1746	
QV751	13		
QV753	14	QV1748	
QV757	14		
QV761	14	QV1750	



STANDARD PACKAGING
Packed 1 Pair Per Bag
2 Pair Per Master Carton

HIGH VOLT

PREMIUM EMERGENCY VEHICLES
(POLICE, FIRE & AMBULANCE)

High Volt cable chains are engineered to meet the high-performance needs of emergency vehicles. Large alloy rollers and high strength aircraft cable provide maximum traction and durability.
Easy installation with no rubber tighteners needed.



⚠ DO NOT USE ON TRAILERS

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN
QV539	11	QV9380
QV547	12	QV9384
QV555	12	QV9388
QV563	12	
QV571	12	QV9390
QV575	13	QV9394
QV579	13	
QV583	13	QV9398

LOW CLEARANCE CROSS CHAIN! .420" DIAMETER ROLLERS



STANDARD PACKAGING
Packed 1 Pair Per Plastic Box
4 Pair Per Master Carton

DIAMOND BACK LT

5.5 MM

European Hoop Style Chain

Made of alloy steel with square links in a diamond pattern. Provides a smoother ride than ladder style chains and better tire coverage.

The asymmetrical design gives the added benefit of lateral traction in addition to linear traction for improved cornering.

Rubber tightener OR pull chain tightening system.

⚠ DO NOT USE ON TRAILERS

POPULAR FOR EASY INSTALLATION



PULL CHAIN TYPE

PULL CHAIN TYPE

RUBBER TIGHTENERS NOT REQUIRED

STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
2515Q	23	5.5 MM
2517Q	23	
2519Q	26	
2521Q	26	
2527Q	28	
2529Q	27	
2533Q	25	
2536Q	28	
2539Q	30	



INSIDE FASTENER

RUBBER TIGHTENER TYPE

RUBBER TIGHTENER INCLUDED

STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
2514Q	27	5.5 MM



STANDARD PACKAGING
Packed 1 Pair Per Bag
2 Pair Per Master Carton



RUBBER TIGHTENER TYPE

FOR REPAIR PARTS, SEE PAGE 16

DIAMOND LIGHT

3.7 MM

Light Weight European Hoop Style Chain

All the benefits of the standard Diamond Back chain, but made from smaller material to accomodate lower clearance vehicles and to provide a lighter weight option for easier handling.

Rubber tightener OR pull chain tightening system.

⚠ DO NOT USE ON TRAILERS

POPULAR FOR EASY INSTALLATION



PULL CHAIN TYPE

PULL CHAIN TYPE

RUBBER TIGHTENER NOT REQUIRED

STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
2314LW	16	3.7 MM
2315LW	14	
2317LW	13	
2321LW	15	
2327LW	17	
2328LW	17	
2329LW	16	
2335LW	17	
2337LW	17	



INSIDE FASTENER

RUBBER TIGHTENER TYPE

RUBBER TIGHTENER INCLUDED

STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
2319LW	15	3.7 MM



STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton



RUBBER TIGHTENER TYPE

FOR REPAIR PARTS, SEE PAGE 16

HIGHWAY SERVICE

- ENTRY LEVEL ON-ROAD CHAIN
- CARBON STEEL, ROUND TWIST LINKS

ALSO AVAILABLE: LONG MILEAGE ALLOY (LMC)
Same chain but made from alloy steel for a stronger, longer running on-road option. Runs 3-4x longer. Perfect for fleets.



SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0216
SEE PAGES 106-107 FOR DETAILS



SINGLE



DUAL TRIPLE

NOT FOR PLOW, FORKLIFT, TOW TRUCK OR OFF-ROAD USE.
SEE PAGE 31 FOR THESE APPLICATIONS.

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

NON-CAM		CAM STYLE		NON-CAM		CAM STYLE			
STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
-	-	2209QC	21	-	-	-	-	6219	5.5 MM
-	-	2211QC	23	-	-	4211QC	46		
2214	27	2214QC	29	4214	50	4214QC	54	6221	
2216	22	2216QC	23	-	-	4216QC	40		
2219	25	2219QC	25	4219	44	4219QC	46		
2221	25	2221QC	27	4221	47	4221QC	50		
2228	29	2228QC	30	4228	51	4228QC	56	6225	
2229	25	2229QC	25	4229	45	4229QC	52		

V-BAR

- HIGHWAY SERVICE CHAIN WITH "ICE BREAKER" CLEATS WELDED ONTO CROSS LINKS
- V-BAR LINKS GRIP ICE AND PACKED SNOW BETTER THAN REGULAR HIGHWAY SERVICE
- CARBON STEEL





SINGLE



DUAL TRIPLE

NOT FOR PLOW, FORKLIFT, TOW TRUCK OR OFF-ROAD USE.
SEE PAGE 31 FOR THESE APPLICATIONS.

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

NON-CAM		CAM STYLE		NON-CAM		CAM STYLE			
STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
-	-	2809QC	26	-	-	-	-	6819	5.5 MM
2811	25	2811QC	26	-	-	-	-		
2814	31	2814QC	32	4814	55	4814QC	57	6821	
2816	24	2816QC	25	-	-	-	-		
2819	26	2819QC	29	4819	51	4819QC	51		
2821	28	2821QC	30	4821	54	4821QC	54		
2828	32	2828QC	33	4828	57	4828QC	60	6825	
2829	27	2829QC	29	4829	53	4829QC	55		

SQUARE LINK & TWISTED SQUARE LINK

- FOR HIGHWAY AND LIGHT OFF-ROAD USE
- TWISTED SQUARE LAYS LOWER ON THE TREAD RESULTING IN A SMOOTHER RIDE

UPGRADES OVER HIGHWAY SERVICE CHAIN:

- Made from alloy steel, which is a stronger, longer lasting material than carbon steel.
- Square rod material gives each link edges for more aggressive bite and grip.

ALSO AVAILABLE: NON-CAM ("SL" & "SLTWIST")



SQUARE



TWISTED SQUARE





SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

CAM STYLE		TWISTED CAM STYLE		CAM STYLE		TWISTED CAM STYLE			
STOCK NUMBER	WT/PR (LBS)	STOCK NUMBER	WT/PR (LBS)	STOCK NUMBER	WT/PR (LBS)	STOCK NUMBER	WT/PR (LBS)	CROSS CHAIN (SQUARE & TWISTED)	WIRE SIZE
2114SLC	30	2114SLCTWIST	29	4114SLC	52	4114SLCTWIST	52	6221SL & 6221SLTWIST	5.5 MM
2116SLC	23	2116SLCTWIST	22	-	-	-	-		
2119SLC	26	2119SLCTWIST	25	4119SLC	47	4119SLCTWIST	47		
2121SLC	28	2121SLCTWIST	29	4121SLC	52	4121SLCTWIST	53		
2128SLC	29	2128SLCTWIST	31	4128SLC	55	4128SLCTWIST	56	6225SL & 6225SLTWIST	
2129SLC	26	2129SLCTWIST	27	4129SLC	56	-	-		

HEAVY DUTY SQUARE LINK

- FOR HEAVY DUTY ON/OFF-ROAD APPLICATIONS SUCH AS PLOW, UTILITY AND TOW TRUCK USE
- RHD = NON-CAM STYLE
- HDQC = CAM STYLE

ALSO AVAILABLE: HEAVY DUTY TWISTED SQUARE LINK (ADD "TWIST" TO END OF THE PART NUMBER)

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0216
SEE PAGES 106-107 FOR DETAILS



SINGLE



DUAL TRIPLE

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

NON-CAM		CAM STYLE		NON-CAM		CAM STYLE			
STOCK NUMBER	WT/PR (LBS)	STOCK NUMBER	WT/PR (LBS)	STOCK NUMBER	WT/PR (LBS)	STOCK NUMBER	WT/PR (LBS)	CROSS CHAIN	WIRE SIZE
2114RHD	39	2114HDQC	41	4114RHD	72	4114HDQC	74	6251SL	7 MM
2119RHD	36	2119HDQC	37	4119RHD	64	4119HDQC	68		
2121RHD	36	2121HDQC	37	4121RHD	66	4121HDQC	67		
2128RHD	38	2128HDQC	40	4128RHD	72	4128HDQC	74	6253SL	
2129RHD	40	2129HDQC	42	4129RHD	66	4129HDQC	65		

NORDIC™ STUDDED

- OUR MOST AGGRESSIVE OFF-ROAD CHAIN
- USE ON DIFFICULT TERRAIN FOR LOGGING, OIL FIELDS, HUNTING, ETC
- ALLOY STEEL, STUDDED LINK, NON-CAM

ALSO AVAILABLE: CAM STYLE (ADD "QC" TO END OF PART NUMBER)



NORDIC™ tire chains
engineered in Canada

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0216
SEE PAGES 106-107 FOR DETAILS



SINGLE



DUAL TRIPLE

TIRE SIZE	SINGLE (1 PR/BAG) STOCK NUMBER	SINGLE (1 PR/BAG) WEIGHT PER PAIR (LBS)	DUAL TRIPLE (1/2 PR/BAG) STOCK NUMBER	DUAL TRIPLE (1/2 PR/BAG) WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
285/75-16; 285/70-17; 295/70-17; 285/75-17 33x12.50x15; 33x12.50x17	S295	48	-	-	6915	7 MM
315/70-16; 315/70-17; 305/65-18; 35x12.50x17 35x12.50x18	S296	53	-	-		
325/65-18; 37x12.50x17; 37x13.50x17; 37x13.50x18	S298	66	-	-	6926	8 MM
235/75-16; 245/75-16; 215/85-16; 225/85-16; 245/70-17; 225/70-17.5; 31x10.50x15; 32x9.50x15	S315	44	S715	81	6912	7 MM
265/75-16; 265/70-17; 235/80-17; 225/70-19.5 32x11.50x15	S320	48	S720	86		
245/85-16; 265/85-16; 265/70-18; 275/70-18 245/70-19.5; 265/70-19.5	S322	52	S722	93	6913	

MUD SERVICE

- BUILT OUT OF LARGER MATERIAL THAN OUR STANDARD HIGHWAY SERVICE CHAIN TO TACKLE OFF-ROAD MUD USE APPLICATIONS
- EXTRA HEAVY HOOKS STAND UP TO INCREASED TORQUE FROM DIGGING THROUGH DEEP MUD
- CARBON STEEL, OVERSIZED ROUND TWIST LINKS, NON-CAM

ALSO AVAILABLE: CAM STYLE
(ADD "QC" TO END OF PART NUMBER)



SINGLE



DUAL TRIPLE

TIRE SIZE	SINGLE (1 PR/BAG) STOCK NUMBER	SINGLE (1 PR/BAG) WEIGHT PER PAIR (LBS)	DUAL TRIPLE (1/2 PR/BAG) STOCK NUMBER	DUAL TRIPLE (1/2 PR/BAG) WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
205/75-16; 215/75-15; 225/70-15	2433HH	35	-	-	6256HH	8 MM
225/75-15; 235/75-16; 225/70-16; 235/75-16 215/85-16; 215/70-17.5; 235/70-16; 215/70-16 225/55-18	2435HH	41				
7.50-16; 275/60-15; 245/70-15; 265/70-15; 265/75-15 225/70-19.5; 245/75-16; 235/85-16; 235/80-17	2437HH	44	4412HH	78		
245/65-17; 255/70-17; 265/70-17; 275/70-17 275/60-18; 245/70-19.5	2439HH	43	4425HH	86	6260HH	
305/70-16; 285/75-16; 285/70-17; 275/70-17.5 305/50-20; 275/60-20; 295/75-16	2440HH	48	-	-		
245/85-15; 315/75-16	2441HH	71	4435HH	123	6434HH	10 MM

WIDE BASE OPTIONS FOR LARGER ALL-TERRAIN TIRES

WIDE BASE HIGHWAY SERVICE

- ENTRY LEVEL ON-ROAD CHAIN
- CARBON STEEL, ROUND TWIST LINKS

NOT FOR PLOW, FORKLIFT, TOW TRUCK OR OFF-ROAD USE.
SEE PAGE 34 FOR THESE APPLICATIONS.



HIGHWAY SERVICE


NON-CAM **CAM STYLE** **(1 PR/BAG)**

STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
3210	26	3210QC	28	6225	5.5 MM
3227	35	3227QC	36	6253	7 MM
3228	30	3228QC	32		
3229	30	3229QC	32	6259	
3231	33	3231QC	34		
3235	43	3235QC	37		

WIDE BASE V-BAR

- HIGHWAY SERVICE CHAIN WITH "ICE BREAKER" CLEATS WELDED ONTO CROSS LINKS
- V-BAR LINKS GRIP ICE AND PACKED SNOW BETTER THAN REGULAR HIGHWAY SERVICE
- CARBON STEEL

NOT FOR PLOW, FORKLIFT, OR TOW TRUCK USE.
SEE PAGE 34 FOR THESE APPLICATIONS.

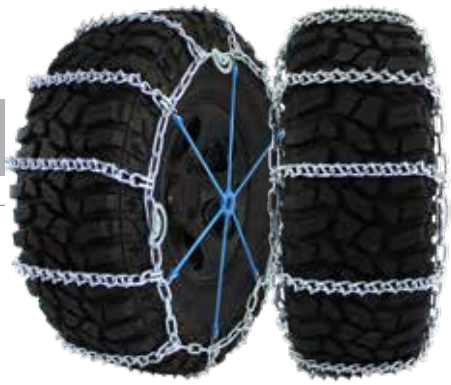

V-BAR

NON-CAM **CAM STYLE** **(1 PR/BAG)**

STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
3810	31	3810QC	31	6825	5.5 MM
3827	37	3827QC	39	6853	7 MM
3828	40	3828QC	42		
3829	40	3829QC	42	6859	
3831	45	3831QC	46		
3835	49	3835QC	50		

WIDE BASE MUD SERVICE

- BUILT OUT OF LARGER MATERIAL THAN OUR STANDARD HIGHWAY SERVICE CHAIN TO TACKLE OFF-ROAD MUD USE APPLICATIONS
- EXTRA HEAVY HOOKS STAND UP TO INCREASED TORQUE FROM DIGGING THROUGH DEEP MUD
- CARBON STEEL, OVERSIZED ROUND TWIST LINKS, NON-CAM

ALSO AVAILABLE: CAM STYLE (ADD "QC" TO END OF PART NUMBER)



MUD SERVICE

NON-CAM **(1 PR/BAG)**

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
3410HH	31	6253	7 MM
3427HH	56	6453HH	10 MM
3428HH	58		
3429HH	64	6434HH	
3431HH	73		
3435HH	76		

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0216
SEE PAGES 106-107 FOR DETAILS

WIDE BASE OPTIONS FOR LARGER ALL-TERRAIN TIRES

WIDE BASE SQUARE LINK

- FOR HIGHWAY AND LIGHT OFF-ROAD USE
- TWISTED SQUARE LAYS LOWER ON THE TREAD RESULTING IN A SMOOTHER RIDE

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0216
SEE PAGES 106-107 FOR DETAILS

UPGRADES OVER HIGHWAY SERVICE CHAIN:

- Made from alloy steel, which is a stronger, longer lasting material than carbon steel.
- Square rod material gives each link edges for more aggressive bite and grip.


ALSO AVAILABLE: NON-CAM ("SL" & "SLTWIST")



SQUARE LINK

TYPE SLC — TYPE SLCTWIST — (1 PR/BAG)

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
3110SLC	28	6225SL	3110SLCTWIST	30	6225 SLTWIST	5.5 MM
3127SLC	39	6253SL	3127SLCTWIST	41	6253 SLTWIST	7 MM
3128SLC	43		3128SLCTWIST	43		
3129SLC	42	6259SL	3129SLCTWIST	42	6259 SLTWIST	
3131SLC	47		3131SLCTWIST	53		
3135SLC	54		3135SLCTWIST	56		

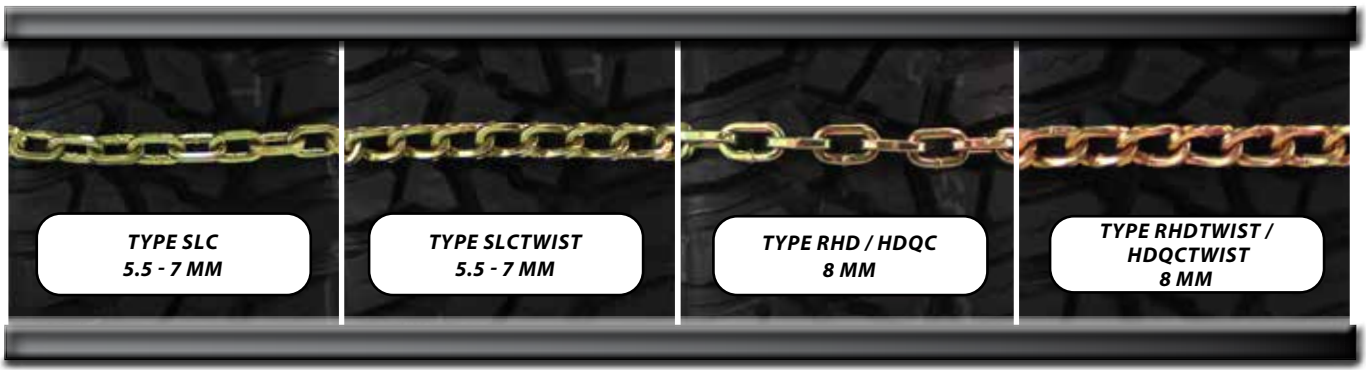

WIDE BASE HEAVY DUTY SQUARE LINK

- FOR HEAVY DUTY ON/OFF-ROAD APPLICATIONS SUCH AS PLOW, UTILITY AND TOW TRUCK USE
- RHD = NON-CAM STYLE
- HDQC = CAM STYLE

ALSO AVAILABLE: HEAVY DUTY TWISTED SQUARE LINK
(ADD "TWIST" TO END OF THE PART NUMBER)



HD SQUARE LINK

NON-CAM — CAM STYLE — (1 PR/BAG)

STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
3128RHD	54	3128HDQC	50	6260SL	8 MM
3129RHD	49	3129HDQC	50	6263SL	
3131RHD	54	3131HDQC	58		
3135RHD	57	3135HDQC	58		


COMMERCIAL TRUCK
6-378
HILLSBORO
BR3
FIRE & RESCUE
F-350

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT TRUCK *QV800*	KING COBRA *2300 3300*	HIGHWAY SINGLE *2200QC 3200QC*	HWY DUAL TRIPLES *4200QC*	V-BAR SINGLE *2800QC 3800QC*	LT. WEIGHT ALLOY SINGLE *2200CAML 3200CAML-7*	LMC ALLOY SINGLE *2200LMC 3200LMC*	SQUARE LINK SINGLE *2100SLC 3100SLC*	MUD SERVICE *2400HH 3400HH*	NORDIC STUDDED *S300*
	Page 40	Page 43	Page 42	Pgs. 44 & 50	Page 44	Page 44	Pgs. 45 & 50	Pgs. 45 & 50	Pgs. 46 & 51	Pgs. 47 & 50	Pgs. 52 & 53
8.25-15	-	QV835	-	2228QC	4228QC	2828QC	-	2228LMC	2128SLC	-	-
9.00-15	-	QV837	-	2237QC	4237QC	2837QC	-	2237LMC	2137SLC	-	S322
10.00-15	-	QV853	-	-	-	-	-	-	-	-	-
9.5-17.5	***ES195***	QV837	-	-	-	-	-	-	-	-	-
10-17.5	-	QV841	-	2228QC	4228QC	2828QC	-	2228LMC	2128SLC	-	-
15-19.5	-	-	-	3265QC	-	-	-	3265LMC	3165SLC	-	-
16.5-19.5	-	-	3355	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	-
18-19.5	-	-	-	3257QC	-	-	-	3257LMC	3157SLC	-	-
7.00-20	-	***QV583***	***1663***	2233QC	4233QC	2833QC	-	2233LMC	2133SLC	-	S322
7.50-20	***ES199***	-	-	2237QC	4237QC	2837QC	-	2237LMC	2137SLC	2441HH	S322
8.25-20	***ES205***	QV859	2339	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	2441HH	S332
9.00-20	***ES205***	QV869	2341	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	2445HH	S342
10.00/90-20	-	QV877	-	2245QC	4245QC	2845QC	2245CAML	2245LMC	2145SLC	-	-
10.00-20	***ES245***	QV887	2345	2245QC	4245QC	2845QC	2245CAML	2245LMC	2145SLC	2448HH	S343HD
11.00-20	***ES245***	QV887	2351	2251QC	4251QC	2851QC	-	2251LMC	2151SLC	2452HH	S355HD
12.00-20	-	QV896	-	3261QC	-	3861QC	-	3261LMC	3161SLC	3461HH	-
13/80-20	-	-	2345	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2448HH	-
14/80-20	-	QV892	-	2257QC	4257QC	2857QC	-	2257LMC	2157SLC	3455HH	-
38/18.00-20	-	QV897	3369	-	-	-	-	-	-	3469HH	-
10.00-22	-	QV887	2349	2249QC	4249QC	2849QC	2249CAML	2249LMC	2149SLC	2452HH	S344HD
11.00-22	***ES245***	QV891	-	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2452HH	-
7-22.5	-	***QV751***	***1663***	2233QC	4233QC	2833QC	-	2233LMC	2133SLC	2439HH	S320
8-22.5	-	-	-	2237QC	4237QC	2837QC	-	2237LMC	2137SLC	-	S322
9-22.5	***ES205***	QV859	2339	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	2441HH	S332
10-22.5	***ES205***	QV869	2341	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	2445HH	S343HD
11-22.5	***ES225***	QV881	2345	2245QC	4245QC	2845QC	2245CAML	2245LMC	2145SLC	2448HH	S343HD
12-22.5	***ES245***	QV887	2351	2251QC	4251QC	2851QC	-	2251LMC	2151SLC	2452HH	S355HD
12.5-22.5	-	QV887	2351	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2452HH	S355HD
15-22.5	-	-	-	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	-
16.5-22.5	-	QV896	3371	3271QC	-	3871QC	-	3271LMC	3171SLC	3471HH	-
18-22.5	-	QV818	-	3261QC	-	3861QC	-	3261LMC	3161SLC	3461HH	-
11.00-24	-	QV891	-	2253QC	4253QC	2853QC	-	2253LMC	2153SLC	2470HH	S355HD
12.00-24	-	QV899	-	2257QC	4257QC	2857QC	-	2257LMC	2157SLC	-	S382HD
11-24.5	***ES245***	QV887	2349	2249QC	4249QC	2849QC	2249CAML	2249LMC	2149SLC	2452HH	S344HD
12-24.5	-	-	-	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2486HH	-
325/80-16	-	QV859	-	3251QC	-	-	-	-	3151SLC	-	-
305/85-16	-	QV853	-	-	-	-	-	-	-	-	-
325/75-17	-	QV853	-	2226QC	4226QC	2826QC	-	-	2126SLC	-	-
295/75-17.5	-	QV859	-	2226QC	4226QC	2826QC	-	-	2126SLC	-	-
375/60-18	-	QV853	-	-	-	-	-	-	-	-	-
355/65-18	-	-	-	3254QC	-	3854QC	-	-	3154SLC	-	-
445/65-19.5	-	QV896	3371	3271QC	-	3871QC	-	3271LMC	3171SLC	3471HH	S382HD
245/70-19.5	***ES188***	QV835	***1675***	2228QC	4228QC	2828QC	-	2228LMC	2128SLC	2439HH	S322
255/70-19.5	-	QV835	-	2228QC	4228QC	2828QC	-	2228LMC	2128SLC	-	-
265/70-19.5	***ES195***	QV837	-	2237QC	4237QC	2837QC	-	2237LMC	2137SLC	-	S332
275/70-19.5	***ES195***	QV837	-	2237QC	4237QC	2837QC	-	2237LMC	2137SLC	-	-
285/70-19.5	***ES195***	QV853	-	2246QC	4246QC	2846QC	-	2246LMC	2146SLC	-	S342
295/70-19.5	-	QV853	-	-	-	-	-	-	-	-	-
305/70-19.5	***ES199***	-	-	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	-	S343HD
265/75-19.5	-	QV837	-	2237QC	4237QC	2837QC	-	2237LMC	2137SLC	-	-
285/65-20	-	QV859	***1681***	2226QC	4226QC	2826QC	-	-	2126SLC	3431HH	-

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

NOTE: Part numbers that are ***BOLD ITALIC*** meet and/or exceed S.A.E. Class "S" Clearance requirements.

*** Most tire chains are available in CAM (QC) and NON-CAM versions.**

TIRE SIZE	EASYSOX *ES*	VOLT TRUCK *QV800*	KING COBRA *2300 3300*	HIGHWAY SINGLE *2200QC 3200QC*	HWY DUAL TRIPLES *4200QC*	V-BAR SINGLE *2800QC 3800QC*	LT. WEIGHT ALLOY SINGLE *2200CAML 3200CAML-7*	LMC ALLOY SINGLE *2200LMC 3200LMC*	SQUARE LINK SINGLE *2100SLC 3100SLC*	MUD SERVICE *2400HH 3400HH*	NORDIC STUDDED *S300*
	Page 40	Page 43	Page 42	Pgs. 44 & 50	Page 44	Page 44	Pgs. 45 & 50	Pgs. 45 & 50	Pgs. 46 & 51	Pgs. 47 & 50	Pgs. 52 & 53
400/70-20	-	QV892	3355	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	-
335/80-20	-	-	-	3254QC	-	-	-	3254LMC	3154SLC	-	-
365/80-20	-	QV892	-	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	-
395/85-20	-	-	-	3261QC	-	3861QC	-	3261LMC	3161SLC	3461HH	-
315/60-22	-	QV865	-	-	-	-	-	-	-	-	-
445/50-22.5	***ES445***	QV897	3369	3269QC	-	3869QC	3269CAML-7	3269LMC	3169SLC	3469HH	S372HD
455/50-22.5	***ES455***	QV897	3369	3269QC	-	3869QC	3269CAML-7	3269LMC	3169SLC	3469HH	-
425/55-22.5	-	QV896	3371	3271QC	-	3871QC	-	3271LMC	3171SLC	3471HH	S377HD
445/55-22.5	-	QV897	3369	3269QC	-	3869QC	3269CAML-7	3269LMC	3169SLC	3469HH	S377HD
455/55-22.5	***ES455***	QV899	3371	3271QC	-	3871QC	-	3271LMC	3171SLC	3471HH	S377HD
295/60-22.5	-	QV859	-	3231QC	-	3831QC	-	3231LMC	3131SLC	-	-
285/65-22.5	-	QV869	-	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	-	-
385/65-22.5	***ES385***	QV892	3355	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	S372HD
425/65-22.5	***ES425***	QV896	3371	3271QC	-	3871QC	-	3271LMC	3171SLC	3471HH	S377HD
445/65-22.5	-	QV818	-	3261QC	-	3861QC	-	3261LMC	3161SLC	3461HH	S382HD
225/70-22.5	-	***QV583***	***1669***	2233QC	4233QC	2833QC	-	2233LMC	2133SLC	-	S332
245/70-22.5	-	QV853	-	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	2441HH	S332
255/70-22.5	***ES199***	QV859	2339	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	2441HH	S332
275/70-22.5	***ES199***	QV869	-	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	2445HH	S342
295/70-22.5	***ES205***	QV877	2343	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	-	-
305/70-22.5	***ES205***	QV881	2345	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	2448HH	-
315/70-22.5	***ES205***	QV881	2345	-	-	-	-	-	-	-	-
365/70-22.5	-	QV892	3355	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	-
425/70-22.5	-	-	3371	3271QC	-	3871QC	-	3271LMC	3171SLC	3471HH	-
235/75-22.5	-	-	-	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	-	S332
245/75-22.5	***ES199***	QV859	-	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	2441HH	S332
255/75-22.5	-	QV859	2339	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	-	-
265/75-22.5	***ES205***	QV865	-	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	2445HH	S342
275/75-22.5	-	QV877	2343	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	2448HH	-
285/75-22.5	***ES205***	QV877	2343	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	2448HH	S343HD
295/75-22.5	***ES205***	QV877	2343	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	2448HH	S343HD
235/80-22.5	***ES199***	QV859	2339	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	2441HH	S332
245/80-22.5	-	QV859	2339	2239QC	4239QC	2839QC	-	2239LMC	2139SLC	-	-
255/80-22.5	***ES205***	QV865	-	2241QC	4241QC	2841QC	-	2241LMC	2141SLC	2441HH	S342
275/80-22.5	***ES205***	QV881	2343	2245QC	4245QC	2845QC	2245CAML	2245LMC	2145SLC	2445HH	S343HD
285/80-22.5	***ES225***	QV881	2351	2251QC	4251QC	2851QC	-	2251LMC	2151SLC	-	-
295/80-22.5	***ES225***	QV881	2351	2251QC	4251QC	2851QC	-	2251LMC	2151SLC	2448HH	S355HD
305/80-22.5	-	QV881	2347	2251QC	4251QC	2851QC	-	2251LMC	2151SLC	2452HH	-
315/80-22.5	***ES245***	QV887	2349	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2486HH	S355HD
365/80-22.5	-	-	3355	3255QC	-	3855QC	3255CAML-7	3255LMC	3155SLC	3455HH	-
275/85-22.5	-	-	-	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	-	S343HD
305/85-22.5	-	QV887	-	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2486HH	S344HD
320/75-24	-	QV887	2351	2251QC	4251QC	2851QC	-	2251LMC	2151SLC	2452HH	-
285/70-24.5	-	QV877	2343	2245QC	4245QC	2845QC	2245CAML	2245LMC	2145SLC	-	-
285/75-24.5	***ES245***	QV881	2347	2249QC	4249QC	2849QC	2249CAML	2249LMC	2149SLC	2452HH	S344HD
295/75-24.5	***ES245***	-	-	2249QC	4249QC	2849QC	2249CAML	2249LMC	2149SLC	2452HH	S344HD
305/75-24.5	-	QV887	-	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2452HH	S344HD
315/75-24.5	-	-	3355	2255QC	4255QC	2855QC	-	2255LMC	2155SLC	2452HH	S355HD
275/80-24.5	***ES225***	QV877	2347	2247QC	4247QC	2847QC	2247CAML	2247LMC	2147SLC	2452HH	S344HD
285/80-24.5	-	QV881	2351	2249QC	4249QC	2849QC	2249CAML	2249LMC	2149SLC	2452HH	S344HD

Quick and Easy to Install

SCAN CODE
FOR INSTALLATION VIDEO

EASYSOX

COMMERCIAL TRUCK

THE TRUE ALTERNATIVE TO TRADITIONAL TRACTION

EMERGENCY TRACTION DEVICE

LIGHT WEIGHT: EASIER TO HANDLE AND STORE!

LESS BULKY: CAN BE APPLIED TO VEHICLES WITH EXTREMELY LOW CLEARANCE!

SAFE TO USE WITH FAIRINGS, COWLINGS OR AIR DEFLECTORS!

LOWER RISK: OF VEHICLE DAMAGE, NO METAL OR PLASTIC COMPONENTS THAT CAN STRIKE VEHICLE OR SCUFF WHEELS!

APPROVED FOR USE IN:

ALL 50 STATES

ÖNORM EN 1662-1:2020

ISSE

B26

TUV



EASY AS...



Dipl.-Ing. Dr. Moschik ZT GmbH
Accreditation body #288
Device tested and certified according
EN 16662-1
Reg.Nr: 288-20637

DISCLAIMER:
EASYSOX ARE GUARANTEED FOR WORKMANSHIP AND MATERIAL ONLY.
THE CONSUMER ACCEPTS ALL LIABILITY IN USE OF THIS PRODUCT. ALL SALES ARE FINAL.

GO GREEN

EASYSOX are an environmentally friendly traction alternative. No steelmaking or zinc plating involved in the manufacturing process.

QUALITY CHAIN CORP

For more info please visit our website:
WWW.EASYSOX.COM

COMMERCIAL TRUCK

EASY INSTALLATION:

INSTALL EASYSOX IN A SAFE PLACE AWAY FROM TRAFFIC. AFTER BRINGING VEHICLE TO A COMPLETE STOP, PUT VEHICLE IN PARK, TURN OFF ENGINE AND ENGAGE PARKING BRAKE.




LAY EASYSOX OVER THE DRIVE AXLE TIRES. STARTING FROM THE TOP OF THE TIRE, WORK THE EASYSOX OVER THE TREADFACE AND WRAP OVER THE INNER SIDEWALL OF THE TIRE, WORKING YOUR WAY DOWN TOWARD THE ROAD SURFACE.

PULL VEHICLE FORWARD (ABOUT A HALF REVOLUTION OF TIRE) UNTIL THE TIRE IS RESTING ON THE TOP OF THE MOUNTED SECTION OF THE EASYSOX. CONTINUE TO PULL THE FABRIC OVER THE INNER SIDEWALL UNTIL IT IS EVENLY DISTRIBUTED AROUND THE ENTIRE TIRE.

IT'S JUST THAT EASY!

EASYSOX TIPS:

- ACCELERATE SLOWLY.
- DO NOT BRAKE HARD.
- DO NOT SPIN TIRES WHILE EASYSOX ARE MOUNTED AS IT MAY DAMAGE THE FABRIC.
- MAKE SURE EASYSOX ARE TEST FITTED BEFORE FIRST USE.
- EASYSOX ARE RECOMMENDED FOR SHORT DISTANCE DRIVING ONLY.
- CHECK EASYSOX PERIODICALLY FOR WEAR AND PROPER PLACEMENT.
- FOR SAFER OPERATION, EASYSOX CAN BE INSTALLED ON ALL WHEEL POSITIONS OF VEHICLE.
- DO NOT PARK FOR EXTENDED PERIODS WITH EASYSOX MOUNTED AS THEY MAY FREEZE TO THE ROAD.
- AFTER EACH USE LAY EASYSOX OUT TO DRY BEFORE RETURNING TO BAG FOR STORAGE.
- WHEN THE FABRIC ON THE TREAD FACE IS MORE THAN 50% WORN, REMOVE AND DISCARD IN A PROPER RECEPTACLE.

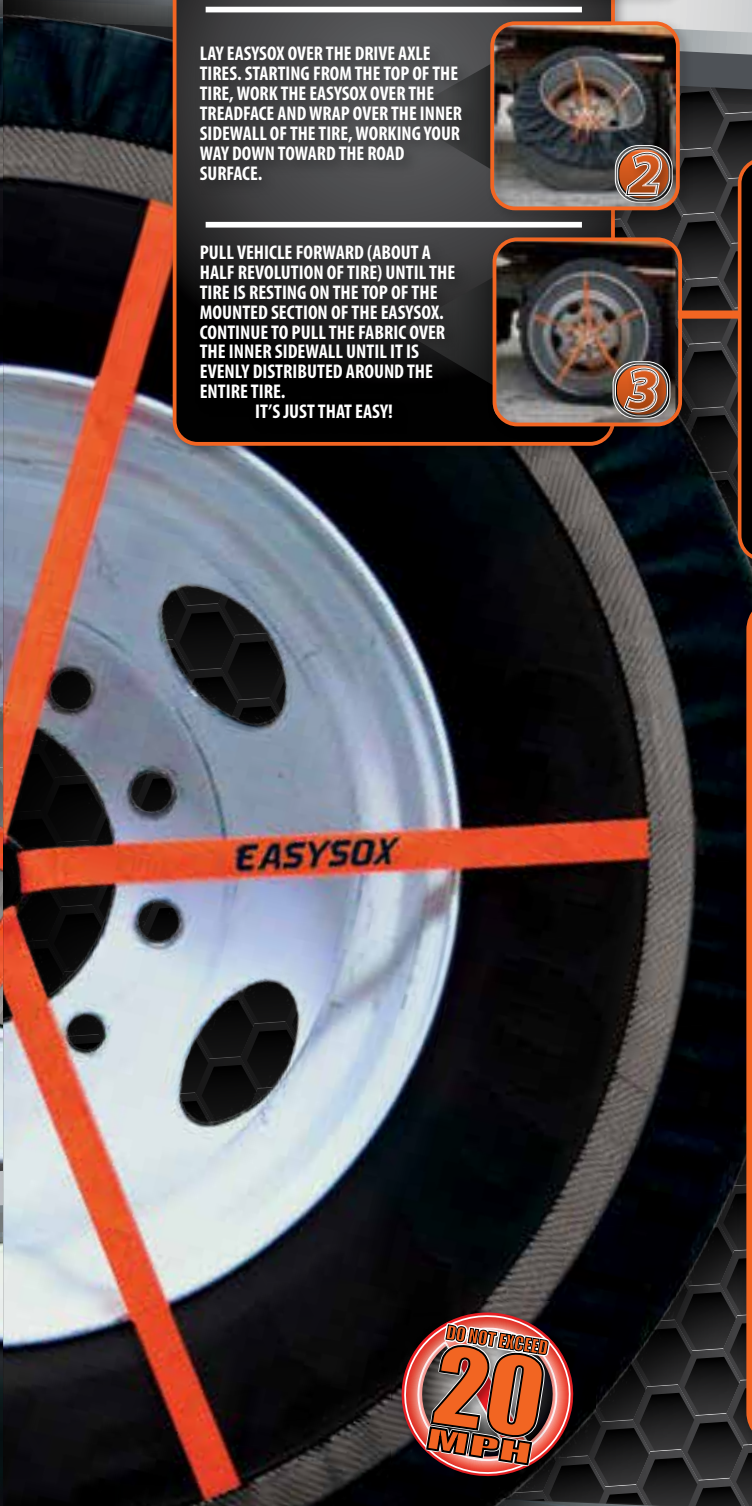

COMMERCIAL TRUCK FITMENT CHART

TIRE SIZE	EASYSOX NUMBER
245/70-19.5	ES188
285/70-19.5; 265/70-19.5; 275/70-19.5 9.5-17.5	ES195
255/70-22.5; 7.50-20; 305/70-19.5 275/70-22.5; 245/75-22.5; 235/80-22.5	ES199
295/70-22.5; 295/75-22.5; 8.25-20 9.00-20; 9-22.5; 10-22.5; 305/70-22.5 315/70-22.5; 265/75-22.5; 285/75-22.5 255/80-22.5; 275/80-22.5	ES205
11-22.5; 285/80-22.5; 295/80-22.5 275/80-24.5	ES225
11-24.5; 315/80-22.5; 12-22.5 10.00-20; 11.00-20; 285/75-24.5 295/75-24.5	ES245
385/65-22.5	ES385
425/65-22.5	ES425
445/50-22.5	ES445
455/50-22.5; 455/55-22.5	ES455

PLEASE NOTE: This is a guide only. Actual fitments and clearances may vary. Please check prior to use.

Quick and Easy to Install

EASYSOX

WWW.EASYSOX.COM

⚠ CHECK YOUR VEHICLE OWNER'S MANUAL BEFORE USING EASYSOX TO CONFIRM CLEARANCE FOR TRACTION DEVICES. FOLLOW ALL VEHICLE GUIDELINES.

⚠ EASYSOX ARE ONLY INTENDED FOR USE ON SNOW OR ICE COVERED SURFACES; NOT ON WET OR DRY PAVEMENT. REMOVE EASYSOX WHEN THE ROAD SURFACE IS CLEAR.

⚠ REFER TO THE FITMENT CHART TO CONFIRM THE EASYSOX IS THE CORRECT SIZE FOR THE TIRE YOU ARE APPLYING IT TO. PRIOR TO USE, PRE-FIT EASYSOX TO VEHICLE TIRE TO VERIFY CORRECT FITMENT.

EASYSOX TRUCK

EasySox provide great traction on snow and ice!
Advanced technology fabric traction device.
(See instructions and disclaimers on previous page)

STOCK NUMBER	WEIGHT PER PAIR (LBS)
ES188	3.7
ES195	3.8
ES199	5
ES205	4.9
ES225	5
ES245	4.5
ES385	5
ES425	5
ES445	5.2
ES455	5

APPROVED FOR USE IN

ALL 50 STATES





STANDARD PACKAGING
Packed 1 Pair Per Bag
4 Pair Per Master Carton



TRUCK

EMERGENCY STRAP-ON TRUCK CHAIN

- **USE ONLY TO GET VEHICLE UNSTUCK FROM PARKING LOT, DOCK OR SIDE STREET. REMOVE AS SOON AS VEHICLE IS FREE.**
- **EASY ON AND OFF INSTALLATION**
- **MUST USE WHEELS WITH HOLES OR SLOTS FOR PROPER MOUNTING/USE**









EMERGENCY TRUCK CHAIN WITH LINK FASTENER

STOCK NUMBER	APPLICATION	NO. OF CROSS CHAINS	STANDARD PACKAGING	WEIGHT PER PAIR (LBS)	PICTURE NUMBER
AEMC1399	19.5 - 24.5	1	1 Pair	6	1
AEMC1013		2		13	2
AEMC1013V		2		14	3
AEMC445	Super Single	2		15	2
AEMC445V		2		15	3

EMERGENCY TRUCK CHAIN WITH WEB FASTENER

STOCK NUMBER	APPLICATION	NO. OF CROSS CHAINS	STANDARD PACKAGING	WEIGHT PER PAIR (LBS)	PICTURE NUMBER
AEMC1013S	19.5 - 24.5	2	1 Pair	13	4
AEMC445S	Super Single	2		15	



STANDARD PACKAGING
1 PAIR PER BOX/BAG

UNIVERSAL CHAIN HANGER

STOCK NUMBER	APPLICATION	STANDARD PACKAGING	WEIGHT PER PKG (LBS)
CH-1	Universal Chain Hanger (with Hinged Lid)	1 Per Box	31
CH-1LID	Replacement Lid for Chain Hanger		8





KING COBRA™ CABLE

- ECONOMY HIGHWAY SERVICE CABLE CHAIN
- MANGANESE ALLOY SPRING ROLLERS WEAR EVENLY
- DESIGNED TO REDUCE WEAR ON SIDEWALL OF TIRES
- LIGHT WEIGHT AND LOW PROFILE

For Traction That Bites!

KING COBRA

EXTRA LARGE CROSS CHAIN! .525" DIAMETER ROLLERS
EXCEEDS MINIMUM REGULATIONS FOR ALL 50 STATES

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

SINGLE

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	CROSS CHAIN WIDTH (INCHES)	OVERALL LENGTH (INCHES)
2339	20	8611	14.89"	88.5"
2341	21			94"
2343	22	8615	15.94"	
2345	21	8619	16.88"	
2347	22	8623	17.44"	
2349	23			100.5"
2351	23	8627	18"	103.6"



SINGLE

DUAL TRIPLE

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	CROSS CHAIN WIDTH (INCHES)	OVERALL LENGTH (INCHES)
4339	33	8611	14.89"	88.5"
4341	35			94"
4343	37	8615	15.94"	
4345	38	8619	16.88"	
4347	39	8623	17.44"	
4349	40			100.5"



DUAL TRIPLE

WIDE BASE

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	CROSS CHAIN WIDTH (INCHES)	OVERALL LENGTH (INCHES)
3355	28	8635	21"	98"
3369	30	8639	24"	92.5"
3371	30	8637	23"	99"



WIDE BASE



STANDARD PACKAGING
- Singles Packed In Pairs
- Dual Triples Packed In 1/2 Pairs (Bags Optional)



FASTENER

TRUCK

VOLT TRUCK

PREMIUM COMMERCIAL TRUCK

- MANGANESE ALLOY ROLLERS PROVIDE EVEN WEAR, LONGEVITY AND REDUCED ROAD VIBRATION
- SPLIT CABLE DESIGN OFFERS FAST, EASY INSTALLATION WITHOUT HAVING TO MOVE THE VEHICLE OR STOP TO RE-ADJUST
- BETTER TIRE-TO-ROAD CONTACT THAN TRADITIONAL LINK CHAINS
- LIGHTER WEIGHT OPTION THAN STANDARD LINK CHAINS

RUBBER TIGHTENERS AND BUNGEE INSTALLATION TOOL INCLUDED



SINGLE

SINGLE

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	BUNGEE
QV835	34	QV8259	QV1882
QV837	35	QV8261	
QV841	35		
QV853	36	QV8263	
QV859	36		
QV865	36		
QV869	36		
QV877	38	QV8265	
QV881	37	QV8263	QV1870
QV887	39	QV8265	



STANDARD PACKAGING
(Packed 1 Pair Per Cardboard Box)

WIDE BASE

STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	BUNGEE
QV891	40	QV8267	QV1882
QV892	40		
QV896	47	QV8275	
QV897	43	QV8269	QV1870
QV899	44	QV8277	
QV818	45	QV8265	QV1874



WIDE BASE



QV1897

Bungee Installation Tool



QV1893

Repair Pliers
(see page 103)

HIGHWAY SERVICE

- ENTRY LEVEL ON-ROAD CHAIN
- CARBON STEEL, ROUND TWIST LINKS
- NEW - 7 MM QC NOW MADE WITH LIGHTWEIGHT ALLOY SIDE CHAIN AND HOOKS





SINGLE DUAL TRIPLE

NOT FOR PLOW, FORKLIFT, TOW TRUCK, FIRE TRUCK OR OFF-ROAD USE.
SEE PAGE 46 FOR THESE APPLICATIONS.

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

NON-CAM		CAM STYLE		NON-CAM		CAM STYLE			
STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
2239	43	2239QC	35	4239	76	4239QC	64	6251	7 MM
2241	46	2241QC	38	4241	86	4241QC	87		
2245	49	2245QC	40	4245	94	4245QC	72		
2247	44	2247QC	39	4247	88	4247QC	73	6253	
2249	50	2249QC	41	4249	91	4249QC	76		
2251	66	2251QC	68	4251	116	4251QC	120	6260	8 MM
2255	67	2255QC	70	4255	127	4255QC	128	6263	
2257	78	2257QC	79	4257	138	4257QC	142		

V-BAR

- HIGHWAY SERVICE CHAIN WITH "ICE BREAKER" CLEATS WELDED ONTO CROSS LINKS
- V-BAR LINKS GRIP ICE AND PACKED SNOW BETTER THAN REGULAR HIGHWAY SERVICE
- CARBON STEEL

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS



STANDARD BAG



SINGLE DUAL TRIPLE



NOT FOR PLOW, FORKLIFT, TOW TRUCK OR FIRE TRUCK USE.
SEE PAGE 46 FOR THESE APPLICATIONS.

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

NON-CAM		CAM STYLE		NON-CAM		CAM STYLE			
STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
2839	44	2839QC	49	4839	85	4839QC	94	6822	7 MM
2841	51	2841QC	51	4841	91	4841QC	104		
2845	52	2845QC	54	4845	100	4845QC	97		
2847	52	2847QC	54	4847	104	4847QC	98	6853	
2849	55	2849QC	57	4849	103	4849QC	102		
2851	71	2851QC	72	4851	131	4851QC	133	6860	8 MM
2855	74	2855QC	75	4855	140	4855QC	140	6863	
2857	86	2857QC	87	4857	152	4857QC	160		

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408

LIGHT WEIGHT ALLOY

- 5.9 MM ALL ALLOY CONSTRUCTION
- CAN RUN 2-3 TIMES LONGER THAN CARBON CHAIN
- PERFECT FOR ON-ROAD FLEETS
- LESS WEIGHT THAN STANDARD HIGHWAY SERVICE MAKES INSTALLATION EASIER FOR DRIVERS

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS



SINGLE



DUAL TRIPLE

NOT FOR PLOW, FORKLIFT, TOW TRUCK, FIRE TRUCK OR OFF-ROAD USE.
SEE PAGE 46 FOR THESE APPLICATIONS.

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

CAM STYLE		CAM STYLE			
STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
2245CAML	38	4245CAML	71	6251CL	5.9 MM
2247CAML	36	4247CAML	68	6253CL	
2249CAML	39	4249CAML	76		



STANDARD BAG

LONG MILEAGE ALLOY

- IMPROVED QUALITY AND LONGEVITY OVER STANDARD HIGHWAY SERVICE CHAIN
- ALLOY STEEL, ROUND TWIST LINKS
- CAN RUN 3-4 TIMES LONGER THAN CARBON CHAIN
- GREAT OPTION FOR FLEETS MAKING MULTIPLE RUNS OVER SNOW-PACKED PASSES THAT REQUIRE CHAIN USE





SINGLE



DUAL TRIPLE

NOT FOR PLOW, FORKLIFT, TOW TRUCK, FIRE TRUCK OR OFF-ROAD USE.
SEE PAGE 46 FOR THESE APPLICATIONS.

SINGLE MOUNT (1 PR/BAG)

DUAL TRIPLE MOUNT (1/2 PR/BAG)

CAM STYLE		CAM STYLE			
STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
2239LMC	45	4239LMC	88	6251LM	7 MM
2241LMC	48	4241LMC	89		
2245LMC	51	4245LMC	90		
2247LMC	49	4247LMC	87	6253LM	
2249LMC	53	4249LMC	97		
2251LMC	66	4251LMC	123	6260LM	8 MM
2255LMC	73	4255LMC	126	6263LM	



STANDARD BAG

SQUARE LINK

- FOR HIGHWAY AND LIGHT OFF-ROAD USE

UPGRADES OVER HIGHWAY SERVICE CHAIN:

- Made from alloy steel, which is a stronger, longer lasting material than carbon steel.
- Square rod material gives each link edges for more aggressive bite and grip.

ALSO AVAILABLE: NON-CAM ("SL")



STANDARD BAG


SINGLE


DUAL TRIPLE



SINGLE (1 PR/BAG) — DUAL TRIPLE (1/2 PR/BAG)

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
7.50-20; 8-22.5; 9.00-15; 265/70-19.5	2137SLC	50	4137SLC	91	6251SL	7 MM
8.25-20; 9-22.5; 245/70-22.5; 255/70-22.5	2139SLC	47	4139SLC	86		
9.00-20; 10-22.5; 275/70-22.5	2141SLC	57	4141SLC	107		
11-22.5; 10.00-20; 275/80-22.5	2145SLC	53	4145SLC	112		
285/75-22.5; 295/75-22.5; 275/85-22.5	2147SLC	55	4147SLC	108	6253SL	
11-24.5; 10.00-22; 285/75-24.5; 285/80-24.5	2149SLC	59	4149SLC	124		
11.00-20; 12-22.5; 295/80-22.5; 305/85-22.5	2151SLC	71	4151SLC	129	6260SL	8 MM
315/80-22.5; 11.00-22; 12-24.5	2155SLC	77	4155SLC	138	6263SL	

HEAVY DUTY SQUARE LINK

- FOR HEAVY DUTY ON/OFF-ROAD APPLICATIONS SUCH AS PLOW, UTILITY AND TOW TRUCK USE
- RHD = NON-CAM STYLE
- HDQC = CAM STYLE

ALSO AVAILABLE: HEAVY DUTY TWISTED SQUARE LINK (ADD "TWIST" TO THE END OF THE PART NUMBER)



SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS


SINGLE


DUAL TRIPLE

HEAVY DUTY CAM STYLE

SINGLE (1 PR/BAG) — DUAL TRIPLE (1/2 PR/BAG)

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
9.00-20; 10-22.5; 275/70-22.5	2141HDQC	66	4141HDQC	121	6260SL	8 MM
11-22.5; 10.00-20; 275/80-22.5	2145HDQC	71	4145HDQC	129		
285/75-22.5; 295/75-22.5; 275/85-22.5	2147HDQC	72	4147HDQC	155	6263SL	
11-24.5; 10.00-22; 285/75-24.5; 285/80-24.5	2150HDQC	76	4150HDQC	139		

HEAVY DUTY NON-CAM STYLE

9.00-20; 10-22.5; 275/70-22.5	2141RHD	65	4141RHD	117	6260SL	8 MM
11-22.5; 10.00-20; 275/80-22.5	2145RHD	68	4145RHD	129		
285/75-22.5; 295/75-22.5; 275/85-22.5	2147RHD	69	4147RHD	155	6263SL	
11-24.5; 10.00-22; 285/75-24.5; 285/80-24.5	2150RHD	73	4150RHD	138		

TWISTED SQUARE LINK

- FOR HIGHWAY AND LIGHT OFF-ROAD USE
- TWISTED SQUARE LAYS LOWER ON THE TREAD OF THE TIRE RESULTING IN A SMOOTHER RIDE

UPGRADES OVER HIGHWAY SERVICE CHAIN:

- Made from alloy steel, which is a stronger, longer lasting material than carbon steel.
- Twisted square rod material gives each link edges for more aggressive bite and grip.



SINGLE



DUAL TRIPLE



SINGLE (1 PR/BAG)

DUAL TRIPLE (1/2 PR/BAG)

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
7.50-20; 8-22.5; 9.00-15; 265/70-19.5	2137SLCTWIST	52	4137SLCTWIST	94	6251SL TWIST	7 MM
8.25-20; 9-22.5; 245/70-22.5; 255/70-22.5	2139SLCTWIST	48	4139SLCTWIST	99		
9.00-20; 10-22.5; 275/70-22.5	2141SLCTWIST	59	4141SLCTWIST	107		
11-22.5; 10.00-20; 275/80-22.5	2145SLCTWIST	55	4145SLCTWIST	114		
285/75-22.5; 295/75-22.5; 275/85-22.5	2147SLCTWIST	53	4147SLCTWIST	116	6253SL TWIST	
11-24.5; 10.00-22; 285/75-24.5; 285/80-24.5	2149SLCTWIST	58	4149SLCTWIST	125		
11.00-20; 12-22.5; 295/80-22.5; 305/85-22.5	2151SLCTWIST	72	4151SLCTWIST	134	6260SL TWIST	8 MM
315/80-22.5; 11.00-22; 12-24.5	2155SLCTWIST	76	4155SLCTWIST	139	6263SL TWIST	

MUD SERVICE

- BUILT OUT OF LARGER MATERIAL THAN OUR STANDARD HIGHWAY SERVICE CHAIN TO TACKLE OFF-ROAD MUD USE APPLICATIONS
- EXTRA HEAVY HOOKS STAND UP TO INCREASED TORQUE FROM DIGGING THROUGH DEEP MUD
- CARBON STEEL, OVERSIZED ROUND TWIST LINKS, NON-CAM

ALSO AVAILABLE: CAM STYLE
(ADD "QC" TO END OF PART NUMBER)



SINGLE



DUAL TRIPLE



SINGLE (1 PR/BAG)

DUAL TRIPLE (1/2 PR/BAG)

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN	WIRE SIZE
9-22.5; 245/70-22.5; 255/70-22.5; 255/80-22.5	2441HH	71	4435HH	123	6434HH	10 MM
9.00-20; 10-22.5; 275/70-22.5; 275/80-22.5	2445HH	78	4437HH	145		
11-22.5; 10.00-20; 285/75-22.5; 295/75-22.5	2448HH	87	4448HH	158		
11-24.5; 10.00-22; 11.00-20; 12-22.5; 285/75-24.5 275/80-24.5; 315/75-24.5	2452HH	93	4461HH	180		
315/80-22.5; 12-24.5	2486HH	100	4486HH	186	6438HH	

ASVQ EXTREME

- MADE FROM BORON ENHANCED ALLOY STEEL FOR RUGGED USE AND LONGER LIFE
- HASSLE FREE INSTALLATION WITH THE QUICK AND EASY PULL CHAIN TIGHTENING SYSTEM
- DESIGNED SPECIFICALLY FOR EQUIPMENT IN THE MOST EXTREME APPLICATIONS, BOTH ON AND OFF-ROAD
- THE UNIQUE ASYMMETRICAL PATTERN ALLOWS FOR CONTINUOUS CONTACT WITH THE ROAD'S SURFACE, CREATING AN EXCEPTIONALLY SMOOTH RIDE
- IDEAL FOR VEHICLES THAT REQUIRE THE UTMOST IN LATERAL TRACTION CONTROL (SNOW PLOWS, UTILITY AND EMERGENCY VEHICLES)

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
11-22.5	ASVQ94	82	7 MM
11-24.5; 315/80-22.5	ASVQ97	88	
385/65-22.5	ASVQ01	96	
425/65-22.5	ASVQ155	96	
445/65-22.5	ASVQ160	114	8 MM



PREMIUM RALLYE/POLAR-S

- PREMIUM ALLOY SQUARE LINK DIAMOND PATTERN CHAIN
- DESIGNED TO BE LIGHT WEIGHT, REVERSIBLE & DURABLE
- EXCELLENT TRACTION FOR HEAVY TRUCKS AND BUSES
- POLAR-S TYPE MADE WITH LINK-OVER-LINK DESIGN FOR EXTRA TRACTION AND DURABILITY



SINGLE RALLYE

9/32" - 7 MM

SINGLE RALLYE

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN
11-22.5; 10.00-20; 275/80-22.5 315/70-22.5	310	62	310XC
11-24.5; 10.00-22; 285/75-24.5 315/80-22.5; 285/80-24.5; 12-22.5	315	72	315XC



PATTERN CLOSE-UP

7/32" - 5.5 MM

WIDE BASE POLAR-S

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	CROSS CHAIN
385/65-22.5	385	66	385XC
445/50-22.5; 425/65-22.5	445	70	445XC



WIDE BASE POLAR-S

WIDE BASE HIGHWAY SERVICE

- HIGHWAY SERVICE QC'S BUILT OF 8 MM CARBON STEEL
- CAML-7 BUILT OF LIGHT WEIGHT 7 MM ALLOY, CAN RUN 2-3 TIMES LONGER THAN STANDARD CARBON
- LMC LONG MILEAGE ALLOY BUILT OF 8 MM ALLOY, CAN RUN 3-4 TIMES LONGER THAN STANDARD CARBON

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

ALSO AVAILABLE: NON-CAM STYLE

NOT FOR PLOW, FORKLIFT, TOW TRUCK, FIRE TRUCK OR OFF-ROAD USE.
SEE PAGE 51 FOR THESE APPLICATIONS.



HIGHWAY (QC)
GOOD



LIGHT WEIGHT ALLOY (CAML-7)
BETTER



LONG MILEAGE ALLOY (LMC)
BEST

TRUCK

TIRE SIZE	HIGHWAY 8 MM (1 PR/BAG) STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	LT. WT. 7MM ALLOY (1 PR/BAG) STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	LONG MILEAGE 8MM ALLOY (1 PR/BAG) STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN
385/65-22.5; 365/70-22.5 365/80-22.5	3255QC	56	7213	3255CAML-7	52	7213CL	3255LMC	70	7213LM
445/65-22.5; 395/85-20	3261QC	67	7214	-	-	-	3261LMC	84	7214LM
445/50-22.5; 445/55-22.5	3269QC	57	7215	3269CAML-7	49.5	7215CL	3269LMC	70	7215LM
425/65-22.5; 425/55-22.5 455/55-22.5	3271QC	62		-	-	-	3271LMC	76	

WIDE BASE MUD SERVICE

- BUILT OUT OF LARGER MATERIAL THAN OUR STANDARD HIGHWAY SERVICE CHAIN TO TACKLE OFF-ROAD MUD USE APPLICATIONS
- EXTRA HEAVY HOOKS STAND UP TO INCREASED TORQUE FROM DIGGING THROUGH DEEP MUD
- CARBON STEEL, OVERSIZED ROUND TWIST LINKS, NON-CAM

ALSO AVAILABLE: CAM STYLE (ADD "QC" TO END OF PART NUMBER)



TIRE SIZE	MUD SERVICE (1/2 PR/BAG) STOCK NUMBER	WEIGHT PER PR (LBS)	CROSS CHAIN	WIRE SIZE
385/65-22.5; 365/70-22.5; 365/80-22.5	3455HH	87	6445	10 MM
445/65-22.5; 395/85-20	3461HH	112	7420	
445/50-22.5; 445/55-22.5	3469HH	95	6630	
425/65-22.5; 425/55-22.5; 455/55-22.5	3471HH	100		

WIDE BASE SQUARE LINK & WIDE BASE TWISTED SQUARE LINK

- FOR HIGHWAY AND LIGHT OFF-ROAD USE
- TWISTED SQUARE LAYS LOWER ON THE TREAD OF THE TIRE RESULTING IN A SMOOTHER RIDE

UPGRADES OVER HIGHWAY SERVICE CHAIN:

- Made from alloy steel, which is a stronger, longer lasting material than carbon steel.
- Square rod material gives each link edges for more aggressive bite and grip.

ALSO AVAILABLE: NON-CAM ("SL" & "SLTWIST")



SQUARE LINK

TWISTED SQUARE LINK

SQUARE LINK CAM STYLE (1 PR/BAG) | **TWISTED SQUARE LINK CAM STYLE (1 PR/BAG)**

TIRE SIZE	STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	WIRE SIZE
385/65-22.5; 365/70-22.5 365/80-22.5	3155SLC	74	6268SL	3155SLCTWIST	78	6268SLTWIST	8 MM
445/65-22.5; 395/85-20	3161SLC	91	7215SL	3161SLCTWIST	88	7214SLTWIST	
445/50-22.5; 445/55-22.5	3169SLC	75		3169SLCTWIST	80	7215SLTWIST	
425/65-22.5; 425/55-22.5 455/55-22.5	3171SLC	81		3171SLCTWIST	85		



WIDE BASE HEAVY DUTY SQUARE LINK

- FOR HEAVY DUTY OFF-ROAD APPLICATIONS SUCH AS PLOW, UTILITY AND TOW TRUCK USE
- RHD = NON-CAM STYLE
- HDQC = CAM STYLE

ALSO AVAILABLE: HEAVY DUTY TWISTED SQUARE LINK (ADD "TWIST" TO END OF THE PART NUMBER)

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS



HDQC PICTURED

CAM STYLE (1 PR/BAG) | **NON-CAM STYLE (1 PR/BAG)**

TIRE SIZE	STOCK NUMBER	WEIGHT/ PR (LBS)	STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	WIRE SIZE
385/65-22.5; 365/70-22.5; 365/80-22.5	3155HDQC	102	3155RHD	101	7213HDSL	10 MM
445/65-22.5; 395/85-20	3161HDQC	125	3161RHD	114	E6530S	
445/50-22.5; 445/55-22.5	3169HDQC	122	3169RHD	121		
425/65-22.5; 425/55-22.5; 455/55-22.5	3171HDQC	118	3171RHD	115		

NORDIC™ STUDDED

- FOR THE MOST CHALLENGING OFF-ROAD APPLICATIONS SUCH AS LOGGING, ICE ROADS, OIL FIELDS, ETC
- MADE WITH BORON ENHANCED ALLOY STEEL
- 7 MM BUILT WITH 6 MM SIDE CHAIN AND 6-LINK SPACING
- 8 MM BUILT WITH 8 MM SIDE CHAIN AND 4-LINK SPACING



SINGLE



DUAL TRIPLE



TRUCK

9/32" - 7 MM

TIRE SIZE	SINGLE (1 PR/BAG) NON-CAM STOCK NUMBER	SINGLE (1 PR/BAG) CAM STYLE STOCK NUMBER	WT /PR (LBS)	DUAL TRIPLE (1/2 PR/BAG) NON-CAM STOCK NUMBER	DUAL TRIPLE (1/2 PR/BAG) CAM STYLE STOCK NUMBER	WT / PR (LBS)	CROSS CHAIN
11-22.5; 10.00-20; 285/75-22.5 295/75-22.5; 275/80-22.5; 275/85-22.5	S343LW	S343LWQC	50	S743LW	S743LWQC	92	6913
11-24.5; 10.00-22; 305/85-22.5 305/75-24.5; 275/80-24.5; 285/80-24.5	S344LW	S344LWQC	53	S744LW	S744LWQC	98	
315/80-22.5; 11.00-20; 295/80-22.5 12-22.5; 315/75-24.5	S355LW	S355LWQC	58	S755LW	S755LWQC	110	6915LW
385/65-22.5	S372LW	S372LWQC	61	-	-	-	6916LW
425/65-22.5; 445/55-22.5; 455/55-22.5	S377LW	S377LWQC	68	-	-	-	6918LW
445/65-22.5; 14.00-20	S382LW	S382LWQC	74	-	-	-	6920LW



5/16" - 8 MM

TIRE SIZE	SINGLE (1 PR/BAG) NON-CAM STOCK NUMBER	SINGLE (1 PR/BAG) CAM STYLE STOCK NUMBER	WT / PR (LBS)	DUAL TRIPLE (1/2 PR/BAG) NON-CAM STOCK NUMBER	DUAL TRIPLE (1/2 PR/BAG) CAM STYLE STOCK NUMBER	WT / PR (LBS)	CROSS CHAIN
11-22.5; 10.00-20	S343HD	S343HDQC	78	S743HD	S743HDQC	138	6923
11-24.5; 10.00-22	S344HD	S344HDQC	84	S744HD	S744HDQC	146	
315/80-22.5; 11.00-20; 12-22.5	S355HD	S355HDQC	95	S755HD	S755HDQC	172	6925
385/65-22.5	S372HD	S372HDQC	95	-	-	-	6926
425/65-22.5; 445/55-22.5 455/55-22.5	S377HD	S377HDQC	101	-	-	-	6931HD
445/65-22.5; 14.00-20	S382HD	S382HDQC	110	-	-	-	6932HD

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

NORDIC™ tire chains engineered in Canada

TRYGG SUPER 7 STUDDED

- CONSTRUCTED OF NICKLE-HARDENED ALLOY STEEL
- LIGHT AND STRONG - 35% WEIGHT REDUCTION COMPARED TO CLASSIC 8
- TALLER OVERSIZED RECTANGLULAR STUDS INCREASE GRIP & STRENGTH
- SINGLE AND DUAL TRIPLES (6-LINK SPACING)
- TIGHT (4-LINK SPACING)

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

MADE IN NORWAY



STANDARD PACKAGING
Packed 1 Pair Per Bag
(Dual Triples Packed 1/2 Pair Per Bag)



SINGLE



DUAL TRIPLE



9/32" - 7 MM NON-CAM STYLE

TIRE SIZE	SINGLE (1 PR/BAG) STOCK NUMBER	SINGLE (1 PR/BAG) WEIGHT/ PR (LBS)	TIGHT (1 PR/BAG) STOCK NUMBER	TIGHT (1 PR/BAG) WEIGHT/ PR (LBS)	DUAL TRIPLE (1/2 PR/BAG) STOCK NUMBER	DUAL TRIPLE (1/2 PR/BAG) WEIGHT/ PR (LBS)	CROSS CHAIN
7.50-16; 215/85-16	490053	33	492053	42	-	-	307581
215/75-17.5; 235/70-16; 235/75-15	490062	33	492062	42	-	-	307582
225/70-19.5; 235/75-17.5; 235/85-16	490063	33	492063	42	-	-	307582
245/70-19.5; 245/75-17.5; 245/85-16; 255/85-16	490073	37	492073	48	-	-	307583
10-16.5; 265/70-15	490082	33	492082	42	-	-	307584
8.25-20; 9-22.5; 255/70-22.5	490165	42	492165	42	494165	81	307583
9.00-20; 10-22.5	490364	47	492364	61	-	-	307583
11-22.5; 295/75-22.5; 10.00-20; 275/80-22.5; 285/75-22.5; 285/80-22.5	490374	50	492374	63	494374	91	307584
11-24.5; 10.00-22; 295/75-24.5	490375	54	492375	66	494375	99	307584
12-22.5; 11.00-20; 295/80-22.5; 305/75-24.5; 315/75-22.5	490384	51	492384	66	494384	95	307585
12.00-20	490385	55	492385	70	494385	101	307585
12.00-24	490386	59	492386	81	494386	110	307585
315/80-22.5	490394	54	492394	76	494394	106	307586
14.00-24; 385/95-25	490408	73	492408	97	494408	130	307587
14.00-20; 13.50-20	490416	62	492416	81	494416	123	307588
385/65-22.5	490424	67	492424	79	494424	112	307589
425/65-22.5	490444	66	492444	88	494444	123	307591
445/65-22.5	490446	75	492446	97	494446	123	307591



9/32" - 7 MM CAM STYLE

TIRE SIZE	SINGLE (1 PR/BAG) STOCK NUMBER	SINGLE (1 PR/BAG) WEIGHT/ PR (LBS)	DUAL TRIPLE (1/2 PR/BAG) STOCK NUMBER	DUAL TRIPLE (1/2 PR/BAG) WEIGHT/ PR (LBS)	CROSS CHAIN
7.50-16; 215/85-16	491053	33	-	-	307581
215/75-17.5; 235/70-16; 235/75-15	491062	33	-	-	307582
225/70-19.5; 235/75-17.5; 235/85-16	491063	38	-	-	307582
245/70-19.5; 245/75-17.5; 255/85-16	491073	38	-	-	307583
10-16.5; 265/70-15	491082	33	-	-	307584
8.25-20; 9-22.5; 255/70-22.5	491165	42	495165	81	307583
9.00-20; 10-22.5	491364	47	-	-	307583
11-22.5; 295/75-22.5; 10.00-20; 275/80-22.5; 285/75-22.5; 285/80-22.5	491374	50	495374	90	307584
11-24.5; 10.00-22; 295/75-24.5	491375	51	495375	95	307584
12-22.5; 11.00-20; 295/80-22.5; 305/75-24.5; 315/75-22.5	491384	51	495384	95	307585
12.00-20	491385	55	495385	101	307585
12.00-24	491386	59	495386	110	307585
315/80-22.5	491394	55	495394	108	307586
14.00-24; 385/95-25	491408	73	495408	130	307587
14.00-20; 13.50-20	491416	62	495416	123	307588
385/65-22.5	491424	59	495424	112	307589
425/65-22.5	491444	66	495444	123	307591
445/65-22.5	491446	75	495446	123	307591

TRYGG CLASSIC 8 STUDDED

TRYGG MADE IN NORWAY

- ALL PURPOSE STUDDED TRUCK CHAIN
- SINGLE AND DUAL TRIPLE (4-LINK SPACING)
- DOUBLE DUTY (2-LINK SPACING)



SINGLE



DUAL TRIPLE

SINGLE (1 PR/BAG)

TIRE SIZE	5/16" - 8 MM NON-CAM STOCK NUMBER	5/16" - 8 MM CAM STYLE STOCK NUMBER	WEIGHT/ PR (LBS)	5/16" - 8 MM DOUBLE DUTY (1/2 PR/BAG) STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN
9.00-20; 10-22.5; 275/80-22.5	450364	457364	68	-	-	
11-22.5; 295/75-22.5; 10.00-20 285/75-22.5	460200	460201	75	452200	125	307081
11-24.5; 10.00-22; 295/75-24.5	460220	460221	79	452220	131	
12-22.5; 11.00-20; 295/80-22.5	460222	460223	81	452222	179	307082
385/65-22.5	450924	457424	89	452424	145	307088
12-24.5; 12.00-20; 11.00-22	460230	460231	88	452230	145	307082
12.00-24	460232	460233	101	452232	152	307083
315/80-22.5	460394	460395	82	452394	128	307085
425/65-22.5	450944	457444	95	452944	152	307088
445/65-22.5	450895	457895	106	452895	174	

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

DUAL TRIPLE (1/2 PR/BAG)

TIRE SIZE	5/16"- 8 MM NON-CAM STOCK NUMBER	WEIGHT/ PR (LBS)	5/16"- 8 MM CAM STYLE STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN
9.00-20; 10-22.5; 275/80-22.5	454364	125	457365	125	
11-22.5; 295/75-22.5; 10.00-20 285/75-22.5	464200	136	464201	136	307081
11-24.5; 10.00-22; 295/75-24.5	464220	142	464221	145	
12-22.5; 11.00-20; 295/80-22.5	464222	152	464223	152	307082
12-24.5; 12.00-20; 11.00-22	464230	161	464231	161	
12.00-24	464232	180	464233	223	307083
315/80-22.5	464394	156	464395	149	307085



STANDARD PACKAGING
Packed 1 Pair Per Bag
(Dual Triples Packed 1/2 Pair Per Bag)

TRYGG SQUARE ICE 7 & 8

TRYGG

MADE IN NORWAY

- MADE WITH NICKEL, MANGANESE AND BORON
- SQUARE LINKS BITE INTO ICE AND HARD-PACKED SNOW
- LEVER-STYLE FASTENERS KEEP THE CHAINS TIGHT TO THE TIRE
- DEEP CASE HARDENING AND THROUGH HARDENING FOR EXCELLENT RESISTANCE TO WEAR
- 7 MM BUILT WITH 6 MM SHORT LINK GRADE 80 SIDE CHAIN AND 7 MM CROSS CHAIN IN 6-LINK SPACING PROVIDES 15% WEIGHT REDUCTION WITHOUT ANY LOSS IN TRACTION OR SERVICE LIFE
- 8 MM BUILT WITH 8 MM SIDE AND CROSS CHAIN IN 4-LINK SPACING



SINGLE



DUAL TRIPLE



SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS

SINGLE (1 PR/BAG)

9/32" - 7 MM NON-CAM CAM STYLE

5/16" - 8 MM NON-CAM CAM STYLE

TIRE SIZE	STOCK NUMBER	STOCK NUMBER	WEIGHT/ PR (LBS)	STOCK NUMBER	STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN 7MM	CROSS CHAIN 8MM
225/85-16; 235/85-16	475080	475081	33	-	-	-	304744	-
255/75-22.5	475085	475086	40	-	-	-	304745	-
8.25-20; 9-22.5; 255/70-22.5	475089	475189	43	-	-	-	304744	-
9.00-20; 10-22.5; 275/80-22.5	475090	475091	45	-	-	-	304745	-
11-22.5; 295/75-22.5; 10.00-20 285/75-22.5; 295/70-22.5	475100	475101	47	475200HD	475201HD	73	304746	304884
11-24.5; 10.00-22; 295/75-24.5 315/80-22.5	475110	475111	48	475220HD	475221HD	75	304746	304884
12.00-20	475120	475121	53	475170HD	475171HD	81	304748	304886
12.00-24; 12-24.5	475130	475131	55	475230HD	475231HD	86	304749	304887
385/65-22.5	475123	475124	66	475323HD	475324HD	91	-	304888
445/50-22.5	475125	475126	64	475325HD	475326HD	94	304754	304892
425/65-22.5	475144	475145	70	475344HD	475345HD	90	304754	-
445/65-22.5	475127	475128	61	475427HD	475428HD	95	304750	304890

DUAL TRIPLE (1/2 PR/BAG)

9/32" - 7 MM NON-CAM CAM STYLE

5/16" - 8 MM NON-CAM CAM STYLE

TIRE SIZE	STOCK NUMBER	STOCK NUMBER	WEIGHT/ PR (LBS)	STOCK NUMBER	STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN 7MM	CROSS CHAIN 8MM
11-22.5; 295/75-22.5; 10.00-20 285/75-22.5; 295/70-22.5	469100	469101	84	469200HD	469201HD	132	304746	304884
11-24.5; 10.00-22; 295/75-24.5 315/80-22.5	469110	469111	87	469220HD	469221HD	138	304746	304884
12.00-20	469120	469121	93	469170HD	469171HD	147	304748	304886
12.00-24; 12-24.5	469130	469131	100	469230HD	469231HD	154	304749	304887

TRYGG SCAN TRAC 5

TRYGG

MADE IN NORWAY

- DESIGNED FOR HIGHWAY TRACTION AND FRONT WHEEL APPLICATIONS
- LIGHT AND STRONG 5 MM ALLOY
- WEAR BARS PROVIDE EXCELLENT GRIP AND INCREASE DURABILITY
- CAM STYLE

SPIDER BUNGEES OR RUBBER TIGHTENERS ARE SOLD SEPARATELY
PART # 0218
SEE PAGES 106-107 FOR DETAILS



	SINGLE		DUAL TRIPLE		
TIRE SIZE	STOCK NUMBER	WEIGHT/ PR (LBS)	STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN
215/70-16; 205/75-16; 225/70-15	477055	24	-	-	478457
215/75-17.5; 215/85-16; 225/75-15	477060	24	477061	46	478457
8.75-16.5; 30x9.50-15; 205/75-17.5; 225/75-16	477070	24	-	-	478457
7.50-16; 225/75-17.5; 245/75-16	477080	30	-	-	478495
9.5-17.5; 265/70-17	477081	31	-	-	478495
245/70-19.5	477083	29	-	-	478517
265/70-19.5	477084	29	-	-	478517
255/70-22.5	477085	31	-	-	478495
295/60-22.5	477086	31	-	-	478537
275/70-22.5; 255/80-22.5	477087	36	-	-	478537
295/70-22.5	477088	35	-	-	478537
8.25-20; 9-22.5	477089	31	-	-	478495
9.00-20; 10-22.5	477090	33	-	-	478497
11-22.5; 10.00-20; 295/75-22.5; 305/70-22.5 315/70-22.5	477100	40	477101	64	478537
11-24.5; 10.00-22; 11.00-20; 12-22.5 295/80-22.5	477110	41	477111	64	478537
315/80-22.5	477112	41	-	-	478537
245/70-17.5; 225/70-19.5	477126	24	-	-	478517
445/50-22.5	477190	40	-	-	478657
35x12.50-15	477220	35	-	-	478537
285/70-19.5; 33x12.50-15	477250	31	-	-	478495
385/65-22.5; 365/80-20	477320	44	-	-	478575
455/40-22.5	477323	35	-	-	478577
425/65-22.5	477325	42	-	-	478657
445/65-22.5	477327	44	-	-	478617



STANDARD PACKAGING
Packed 1/2 Pair Per Box
Select Part #'s may come in bags



PATTERN CLOSE-UP

TRYGG TRUCK GROUSER

TRYGG

MADE IN NORWAY

- MADE FOR SNOW BLOWER EQUIPPED COMMERCIAL TRUCKS
- DROP FORGED GROUSERS WITH 10 MM RINGS
- WIDE, ROUNDED BASE REDUCES TIRE WEAR
- GROUSERS ARE SHAPED TO THE RINGS SO THEY CAN'T LAY DOWN
- TIGHTENING RAIL INCLUDED

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
445/65-22.5	503008	250



GROUSER REPAIR KIT
PART # 520110



GROUSER CLOSE-UP




LOADER/GRADER
DEERE
624K-II

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST *2600* Page 62	SQUARE LINK *6500* Page 62	NORDIC STUDDED *2900* Page 63	MAXTRACK H-PATTERN *6500MT* Page 64	NORDIC STUDDED H-PATTERN *2900SHP* Page 64	DIAMOND PATTERN DRQ *500/600 DRQ* Page 65	SWISS FLEXI *570000* Page 69	SUGGESTED TIGHTENER *0200* Pgs. 106-107
13.00-24	2612	6512	2912	6515MT	2915SHP	-	-	0218
13.00-25	2612	6512	2912	6515MT	2915SHP	-	-	0218
13.6-28	2612	6512	2912	6515MT	2915SHP	-	570921	0220
14.00-20	2612	6512	2912	-	2915SHP	-	-	0220
14.00-21	2612	6512	2912	-	-	-	-	0218
14.00-24	2615	6515	2915	6515MT	2915SHP	540DRQ	570760	0220
14.00-25	2615	6515	2915	6515MT	2915SHP	540DRQ	570760	0220
14.5-20	2612	6512	2912	-	-	-	-	0218
14.75/80-20	2612	6512	2912	-	2915SHP	-	-	0218
14.9-24	2612	6512	2912	6515MT	2915SHP	-	570935	0220
15-19.5 R4 TIRE	3265HD	3165RHD	-	-	-	-	-	0218
15.5-25	2612	6512	2912	6515MT	2915SHP	-	570760	0220
16.00-20	2624	6524	2924	6524MT	2924SHP	-	570762	0220
16.00-21	2624	6524	2924	6524MT	2924SHP	-	-	0220
16.00-24	2627	6527	2927	6527MT	2927SHP	-	570781	0294
16.00-25	2627	6527	2927	6527MT	2927SHP	-	570781	0294
16.9-24	2615	6515	2915	6515MT	2915SHP	-	570945	0220
16.9-26	2615	6515	2915	6515MT	2915SHP	-	-	0218
16.9-28 R1-R4	-	-	-	6515MT	2915SHP	-	570950	0294
16.9-30	-	-	-	6515MT	2915SHP	-	570950	0294
17.5/65-20	2627	6527	2927	-	-	-	-	0218
17.5L-24	2615	6515	2915	6515MT	2915SHP	-	-	0220
17.5-25	2624	6524	2924	6524MT	2924SHP	580DRQ	570762	0220
18.00-25	2636	6536	2936	-	-	-	570782	0294
18.00-26	2636	6536	2936	-	-	-	-	0294
18.00-33	2642	6542	-	-	-	-	-	0294
18.4-30	-	-	-	6533MT	2933SHP	-	570950	0294
18.4-34	-	-	-	6545MT	2945SHP	-	570950	0220
19.5L-24	2627	6527	2927	6527MT	2927SHP	-	-	0220
20.5-25	2633	6533	2933	6533MT	2933SHP	592DRQ	570764	0294
20.8-34	-	-	-	6545MT	2945SHP	-	-	0294
21L-24	2636	6536	2936	6533MT	2933SHP	-	-	0220
23.1-26	-	-	-	6545MT	2945SHP	-	570970	0294
23.5-25	2645	6545	2945	6545MT	2945SHP	602DRQ	570766	0294
25/65-25	2645	6545	2945	6545MT	2945SHP	-	-	0294
25.5-25	2645	6545	2945	-	2945SHP	-	-	0296
26.5-25	2657	6557	2957	-	2957SHP	620DRSQ	570768	0296
29.5-25	2672	6572	2972	-	2972SHP	-	570772	0296
29.5-29	2675	6575	2975	-	2975SHP	-	-	0296
35/65-33	-	6580	-	-	-	-	-	0296
38/18.00-20	2612	6512	2912	-	-	-	-	0218
44/18.00-20	2612	6512	2912	-	-	-	-	0218
405/70-18	2612	6512	2912	-	-	-	570930	0218
445/65-19.5	2612	6512	2912	-	2912SHP	-	-	0218
400/70-20	2612	6512	2912	-	-	-	-	0218
405/70-20	2612	6512	2912	-	-	-	570930	0218
375/75-20	2612	6512	2912	-	-	-	-	0218

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST *2600* Page 62	SQUARE LINK *6500* Page 62	NORDIC STUDDED *2900* Page 63	MAXTRACK H-PATTERN *6500MT* Page 64	NORDIC STUDDED H-PATTERN *2900SHP* Page 64	DIAMOND PATTERN DRQ *500/600 DRQ* Page 65	SWISS FLEXI *570000* Page 69	SUGGESTED TIGHTENER *0200* Pgs. 106-107
355/80-20	3257	3157RHD	-	-	-	-	570926	0218
360/80-20	2612	6512	2912	-	2912SHP	-	-	0218
395/80-20	2615	6515	2915	-	-	-	-	0218
395/85-20	3461HH	3161RHD	-	-	-	-	570930	0218
495/55-22.5	2612	6512	2912	-	-	-	-	0218
420/70-24	2624	6524	2924	6515MT	2915SHP	-	570945	0218
440/70-24	2615	6515	2915	6515MT	2915SHP	-	570945	0220
445/70-24	2615	6515	2915	6515MT	2915SHP	-	570945	0220
460/70-24	2615	6515	2915	6515MT	2915SHP	-	570945	0220
495/70-24	2627	6527	2927	6527MT	2927SHP	-	570955	0220
500/70-24	2627	6527	2927	6527MT	2927SHP	-	570955	0220
380/85-24	2612	6512	2912	-	-	-	570935	0220
420/85-24	2615	6515	2915	6515MT	2915SHP	-	570945	0220
385/95-24	2615	6515	2915	6515MT	2915SHP	540DRQ	-	0220
550/65-25	2633	6533	2933	6533MT	2933SHP	592DRQ	570764	0220
600/65-25	2642	6542	-	-	-	-	-	0294
650/65-25	-	-	-	-	-	620DRSQ	-	0296
750/65-25	2657	6557	2957	-	2957SHP	-	570803	0296
555/70-25	2636	6536	2936	-	2933SHP	-	-	0296
755/70-25	2657	6557	2957	-	2957SHP	-	-	0296
385/95-25	2615	6515	2915	6515MT	2915SHP	540DRQ	570762	0218
620/75-26	-	-	-	6545MT	2945SHP	-	-	0296
420/85-26	-	-	-	6515MT	2915SHP	-	-	0296
440/65-28	2612	6512	2912	6515MT	2915SHP	-	570945	0220
340/85-28	2612	6512	2912	6515MT	2915SHP	-	570921	0220
875/65-29	2675	6575	2975	-	2975SHP	-	-	0296
480/85-34	-	-	-	6545MT	2945SHP	-	-	0296



ROUND TWIST & V-BAR

- FOR PLOWS, GRADERS, SCRAPERS & LOADERS
- REGULAR ROUND TWIST LINK AND V-BAR WITH ICE BREAKERS
- CARBON STEEL





4-LINK SPACING



2-LINK SPACING

TIRE SIZE	4-LINK STOCK NUMBER	WT/ PR (LBS)	2-LINK STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN	WIRE SIZE
13.00-24; 13.00-25; 14.00-20; 14.00-21; 15.5-25; 14.75/80-20	2612	113	2612-2	189	6630	10 MM
44/18.00-20; 445/65-19.5; 495/55-22.5; 360/80-20; 400/70-20	2612V	126	2612V-2	229	6830	
14.00-24; 14.00-25; 395/85-20; 385/95-24; 385/95-25; 17.5L-24	2615	123	2615-2	209	6630	
	2615V	151	2615V-2	278	6830	
17.5-25; 16.00-20; 16.00-21; 420/70-24	2624	161	2624-2	280	6640	11 MM
16.00-24; 16.00-25; 17.5/65-20; 19.5L-24	2627	178	2627-2	310		
20.5-25; 550/65-25	2633	188	2633-2	295	6650	
18.00-25; 18.00-26; 21L-24; 555/70-25	2636	206	-			
18.00-33; 600/65-25	2642	244	-			
23.5-25; 25.5-25	2645	330	-		6660	13.5 MM
26.5-25; 750/65-25; 755/70-25	2657	410	-		6670	
29.5-25	2672	516	-		6680	
29.5-29; 875/65-29	2675	531	-			

SQUARE LINK

- FOR PLOWS, GRADERS, SCRAPERS & LOADERS
- ALLOY STEEL FOR MAXIMUM STRENGTH
- REVERSIBLE - CAN BE RUN ON BOTH SIDES FOR LONGER SERVICE LIFE
- SQUARE LINK DESIGN FOR INCREASED TRACTION



SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGES 60-61



4-LINK SPACING



2-LINK SPACING

TIRE SIZE	4-LINK STOCK NUMBER	WEIGHT/ PR (LBS)	2-LINK STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	WIRE SIZE
13.00-24; 15.5-25; 495/55-22.5; 360/80-20; 400/70-20	6512	132	6512-2	210	E6530S	10 MM
14.00-24 SPECIAL	6514	100	6514-2	183	E6520S	8 MM
14.00-24; 14.00-25; 395/85-20; 17.5L-24	6515	149	6515-2	227	E6530S	10 MM
17.5-25; 16.00-20; 420/70-24	6524	180	6524-2	326	E6540SH	11 MM
16.00-24; 16.00-25; 17.5/65-20; 19.5L-24	6527	233	6527-2	372		
20.5-25; 550/65-25	6533	230	6533-2	392	E6550SH	
18.00-25; 18.00-26; 21L-24; 555/70-25	6536	242	6536-2	388		
18.00-33; 600/65-25	6542	292	6542-2	488		
23.5-25; 25.5-25	6545	324	6545-2	492	E6560SH	13.5 MM
26.5-25; 750/65-25; 755/70-25	6557	505	6557-2	632	E6570SH	
29.5-25	6572	412	6572-2	696	E6580SH	
29.5-29; 875/65-29	6575	554	6575-2	854		
35/65-33	6580	608	6580-2	1018	E6590SH	

TRYGG SQUARE ICE 11 & 13

- NORWEGIAN ALLOY STEEL IN 11 MM AND 13 MM
- REVERSIBLE - CAN BE RUN ON BOTH SIDES
- SQUARE LINK DESIGN FOR INCREASED TRACTION
- STANDARD 2-LINK SPACING

ALSO AVAILABLE IN 4-LINK SPACING

TRYGG

MADE IN NORWAY





2-LINK SPACING

TIRE SIZE	2-LINK STOCK NUMBER	WT/ PR (LBS)	WIRE SIZE	2-LINK STOCK NUMBER	WT/ PR (LBS)	WIRE SIZE
14.00-24; 14.00-25	509361-2	285	11 MM	509461-2	317	13 MM
16.00-24; 16.00-25	509362-2	341		509462-2	376	
17.5L-24; 17.5-25; 16.00-20	509371-2	318		509471-2	352	
20.5-25	509372-2	398		509472-2	466	
23.5-25	509381-2	455		509481-2	690	
26.5-25	509382-2	530		509482-2	860	

SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGES 60-61

NORDIC™ STUDDED

- FOR PLOWS, GRADERS, SCRAPERS & LOADERS ON MORE AGGRESSIVE TERRAIN
- PREMIUM ALLOY STEEL FOR MAXIMUM STRENGTH
- STUDDED LINK WITH EXTRA HARD TIPS



NORDIC™ tire chains



4-LINK SPACING

TIRE SIZE	4-LINK STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	2-LINK STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	WIRE SIZE
13.00-24; 13.00-25; 14.00-20; 14.00-21; 15.5-25 14.75/80-20; 44/18.00-20; 445/65-19.5; 495/55-22.5 360/80-20; 400/70-20	2912	126	6930N	-	-	-	10 MM
14.00-24; 14.00-25; 395/85-20; 385/95-24; 17.5L-24	2915	148		2915-2	256	6930N	
17.5-25; 16.00-20; 16.00-21; 420/70-24	2924	198	6940N	2924-2	350	6940N	11 MM
16.00-24; 16.00-25; 19.5L-24; 17.5/65-20	2927	244		2927-2	450		
20.5-25; 550/65-25	2933	261	6950N	2933-2	470	6950N	
18.00-25; 18.00-26; 21L-24; 555/70-25	2936	248		-	-	-	
23.5-25; 25.5-25	2945	324	6960N	2945-2	566	6960N	13.5 MM
26.5-25; 750/65-25; 755/70-25	2957	434	6970N	2957-2	850	6970N	
29.5-25	2972	528	6980N	-	-	-	
29.5-29; 875/65-29	2975	558		-	-	-	

MAXTRACK H-PATTERN

- FOR PLOWS, GRADERS, SCRAPERS & LOADERS
- ALLOY STEEL FOR INCREASED STRENGTH
- H-PATTERN PREVENTS CHAIN FROM FALLING INTO DEEP TIRE LUGS
- SQUARE LINKS IN A LINK-OVER-LINK DESIGN FOR IMPROVED TRACTION



SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGES 60-61



	3/8"- 10 MM			7/16"- 11 MM			17/32"- 13.5 MM		
TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN
13.00-24	6512MT-10	190	8902	6515MT-11	296	8903	-	-	-
14.00-24; 15.5-25; 16.9-24; 17.5L-24	6515MT-10	214					-	-	-
16.00-24; 16.00-25; 19.5L-24	6527MT-10	236		6527MT-11	356	8905	-	-	-
17.5-25; 16.00-20	-	-	-	6524MT-11	290		6524MT-13	320	8907
20.5-25; 550/65-25	-	-	-	6533MT-11	346	8906	6533MT-13	410	8908
23.5-25; 25/65-25	-	-	-	6545MT-11	384		6545MT-13	472	8909

NORDIC™ STUDDED H-PATTERN

- FOR PLOWS, GRADERS, SCRAPERS & LOADERS
- AGGRESSIVE TRACTION FOR EXTREME CONDITIONS
- PREMIUM ALLOY STEEL FOR MAXIMUM STRENGTH
- STUDDED LINK WITH EXTRA HARD TIPS
- H-PATTERN PREVENTS CHAIN FROM FALLING INTO DEEP TIRE LUGS





	3/8"- 10 MM			7/16"- 11 MM			17/32"- 13.5 MM		
TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN
13.00-24	2912SHP-10	222	8502	2915SHP-11	354	8503	-	-	-
14.00-24; 15.5-25; 16.9-24; 17.5L-24	2915SHP-10	232					-	-	-
16.00-24; 16.00-25; 19.5L-24	2927SHP-10	258		2927SHP-11	395	8504	-	-	-
17.5-25; 16.00-20	-	-	-	2924SHP-11	320		2924SHP-13	334	8507
20.5-25; 550/65-25	-	-	-	2933SHP-11	366	8505	2933SHP-13	400	8508
23.5-25; 25/65-25	-	-	-	2945SHP-11	386	8506	2945SHP-13	490	
26.5-25	-	-	-	-	-	-	2957SHP-13	600	8510
29.5-25	-	-	-	-	-	-	2972SHP-13	713	8511
29.5-29; 875/65-29	-	-	-	-	-	-	2975SHP-13	801	

PREMIUM DIAMOND PATTERN

- **PREMIUM** ALLOY DIAMOND PATTERN CHAIN FOR SNOW REMOVAL APPLICATIONS
- FOR PLOWS, GRADERS, SCRAPERS & LOADERS
- PULL CHAIN TIGHTENING SYSTEM

SINGLE DIAMOND LINK-OVER-LINK (TYPE DRQ)
SINGLE DIAMOND WITH WEAR BARS (TYPE WBQ)

DOUBLE DIAMOND LINK-OVER-LINK (TYPE DRSQ)
DOUBLE DIAMOND WITH WEAR BARS (TYPE WBSQ)



SINGLE DIAMOND
(DRQ PICTURED)

DRQ SINGLE DIAMOND LINK-OVER-LINK

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
14.00-24	538DRQ	225	8 MM
	540DRQ	288	10 MM
17.5-25	580DRQ	272	
20.5-25	592DRQ	449	11 MM
23.5-25	602DRQ	539	



DOUBLE DIAMOND
(WBSQ PICTURED)

WBQ SINGLE DIAMOND w/ WEAR BARS

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
14.00-24	540WBQ	300	10 MM
16.00-24	560WBQ	363	
17.5-25	580WBQ	290	
20.5-25	590WBQ	388	
	592WBQ	490	11 MM
23.5-25	600WBQ	435	10 MM
	602WBQ	553	11 MM
	613WBQ	800	13.5 MM

DRSQ DOUBLE DIAMOND LINK-OVER-LINK / **WBSQ DOUBLE DIAMOND w/ WEAR BARS**

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)	STOCK NUMBER	WEIGHT PER PAIR (LBS)	WIRE SIZE
14.00-24	540DRSQ	350	540WBSQ	375	10 MM
17.5-25	580DRSQ	350	580WBSQ	375	
20.5-25	590DRSQ	450	590WBSQ	432	
	592DRSQ	506	-	-	11 MM
23.5-25	600DRSQ	584	600WBSQ	509	10 MM
	602DRSQ	629	-	-	11 MM
26.5-25	620DRSQ	719	-	-	

NORDIC™ SUPER GRIP STUDDED

- FOR PLOWS, GRADERS, SCRAPERS & LOADERS
- AGGRESSIVE TRACTION FOR EXTREME CONDITIONS
- PREMIUM ALLOY STEEL FOR MAXIMUM STRENGTH
- STUDDED LINK WITH EXTRA HARD TIPS
- CONTINUOUS PATTERN PROVIDES EXCELLENT TRACTION IN ALL DIRECTIONS FOR STUDS TO DIG INTO TERRAIN





	3/8"- 10 MM		7/16"- 11 MM		17/32"- 13.5 MM	
TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)
13.00-24	-	-	2915NSG-11	308	-	-
14.00-24; 15.5-25; 16.9-24; 17.5L-24	2915NSG-10	250			-	-
17.5-25; 16.00-20	-	-	2924NSG-11	320	2924NSG-13	440
16.00-24; 16.00-25; 19.5L-24	-	-	2927NSG-11	336	2927NSG-13	465
20.5-25; 550/65-25; 555/70-25	-	-	2933NSG-11	368	2933NSG-13	496
23.5-25; 625/70-20	-	-	2945NSG-11	467	2945NSG-13	595



SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGES 60-61



TRYGG SMT FLEXI

MADE IN NORWAY

TRYGG

- A PERFECT FIT WITHOUT THE USE OF TOOLS
- SMT FLEXI USES STEEL ENHANCED WITH BORON, NICKEL, CHROMIUM AND MANGANESE; FULLY HARDENED FOR MAXIMUM DURABILITY
- 10 MM HOOKS AND 8 MM SIDE CHAIN
- OPTIONAL TIGHTENING RAIL AVAILABLE, PART #336030
- EXTENSION KITS AVAILABLE, SEE PAGE 108



5/16"- 8 MM

TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)
14.9-24	602903	165
14.5-20	602904	143
365/80-20; 375/75-20; 405/70-18; 405/70-20	602907	156
440/65-28; 420/70-24; 460/70-24; 440/70-24; 445/70-24	602910	187
17.5-25; 19.5L-24; 440/80-24; 480/65-28; 16.00-20	602911	213

3/8"- 9.5 MM

TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)
16.00-24; 16.00-25; 440/80-28	603901	262
13.00-24; 13.00-25; 13.6-28; 14.00-20; 14.9-24; 15.5-25	603903	216
14.00-24; 14.00-25	603906	222
14.5-20; 375/75-20; 400/70-18; 405/70-18	603907	183
20.5-25	603908	273
17.5-25; 16.00-20	603911	233





SMT FLEXI LINK
PART # 335508



TIGHTENING RAIL
PART # 336030

TRYGG SMT

MADE IN NORWAY

TRYGG

- GREAT FOR USE IN SNOW CLEARING, FORESTRY AND CONSTRUCTION
- OVERSIZED STUDS INCREASE GRIP AND LAST LONGER
- SMT PATTERN HOLDS THE CHAIN ON TOP OF THE TIRE LUGS, KEEPING THE STUDS IN CONSTANT CONTACT WITH THE TERRAIN
- SMT COMBO FITS MORE THAN ONE TIRE SIZE

	3/8"- 9.5 MM		7/16"-11 MM		1/2"- 13 MM		5/8"- 16 MM	
TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)
14-17.5	603092	171	-	-	-	-	-	-
14.00-24	603780	213	605780	276	-	-	-	-
16.00-24	-	-	605781	308	606781	442	-	-
15-19.5	603110	150	-	-	-	-	-	-
15.5-25	603760	198	605760	251	-	-	-	-
17.5-25	603762	218	605762	277	606762	379	-	-
20.5-25	603764	257	605764	330	606764	425	-	-
20.5-25L5	-	-	605765	345	606765	453	-	-
23.5-25	-	-	-	-	606766	480	608766	812
23.5-25L5	-	-	-	-	-	-	608767	865
26.5-25	-	-	-	-	-	-	608768	805
26.5-25L5	-	-	-	-	-	-	608769	862



SMT COMBO

TIRE SIZE	STOCK NUMBER	INCHES	MM	WEIGHT/ PR (LBS)
17.5-25; 16.9-30	606552	1/2"	13	442
20.5-25; 18.00-25	608965	5/8"	16	717
23.5-25; 18.00-25L5	608968	5/8"	16	860
26.5-25; 26.5-25L5; 29.5-25	608969	5/8"	16	932

SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGES 60-61


TRYGG BEAVER

TRYGG

MADE IN NORWAY

- MADE FOR CONSTRUCTION & FORESTRY USE
- HEAVY DROP FORGED GROUSERS WITH THREE STUD PROFILE
- PATTERN CONNECTED WITH 13 MM RINGS
- LOW LINK PROFILE FITS MACHINES WITH NARROW SPACE BETWEEN TIRES AND FENDERS
- TIGHT PATTERN OFFERS MOST COVERAGE AND HELPS PREVENT TIRE DAMAGE AND WEAR

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
17.5-25; 16.00-20	505041	539
20.5-25	505051	625
20.5-25L5	505052	686
23.5-25	505061	871
23.5-25L5	505062	876
26.5-25	505068	1063
26.5-25L5	505069	1041
29.5-25	505772	1144
29.5-25L5	505773	1380
29.5-29	505774	1208
29.5-29L5	505775	1327
35/65-33	505821	1628
35/65-33L5	505822	1791

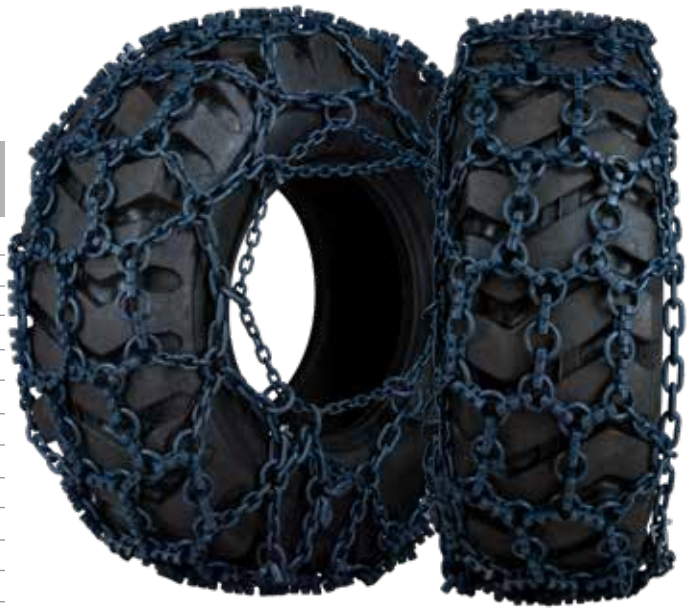



BEAVER / LYNX CLOSE-UP

TRYGG LYNX

- MADE FOR CONSTRUCTION & SNOW CLEARING USE
- HEAVY DROP FORGED GROUSERS WITH THREE STUD PROFILE
- PATTERN CONNECTED WITH 13 MM RINGS
- SAME AS BEAVER IN A MORE OPEN PATTERN

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
17.5-25; 14.00-24; 16.00-20	506050	460
20.5-25; 525/80-25	506051	506
23.5-25; 605/80-25	506052	601
23.5-25L5	506067	585
26.5-25; 685/80-25	506068	629
26.5-25L5	506069	634



TRYGG

MADE IN NORWAY

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408

TRYGG SWISS FLEXI

- GREAT FOR SNOW PLOWS
- COMBINES THE COMFORT OF A LIGHT CHAIN WITH THE SUPERIOR STRENGTH OF SUPER HARDENED WEAR BARS
- EXCELLENT GRIP AND LONG SERVICE LIFE
- AVAILABLE IN 8 MM AND 11.5 MM
- TENSIONING CHAIN AND MOUNTING INSTRUCTIONS INCLUDED
- EXTENSION KITS AVAILABLE, SEE PAGE 108



LENGTH MAY NEED TO BE ADJUSTED ACCORDING TO INSTRUCTIONS WHEN MOUNTING FOR THE FIRST TIME

TRYGG

MADE IN NORWAY

5/16"- 8 MM

TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)
14.00-24; 14.00-25; 15.5-25	570945	316

29/64"- 11.5 MM

TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)
14.00-24; 15.5-25	570760	339
14.00-25; 17.5-25; 16.00-20; 385/95-25	570762	375
16.00-24; 16.00-25	570781	404
20.5-25	570764	470
23.5-25	570766	527
26.5-25	570768	546
29.5-25	570772	804



SWISS FLEXI CLOSE-UP

TRYGG GROUSER

- THE ULTIMATE IN SNOW-CLEARING TRACTION AND OPERATING COMFORT
- DROP FORGED GROUSERS WITH 10 MM RINGS
- WIDE ROUNDED BASE REDUCES TIRE WEAR
- GROUSERS ARE SHAPED TO THE RINGS SO THEY CAN'T LAY DOWN
- TIGHTENING RAIL INCLUDED

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)
14.00-24	503040	249
16.00-24	503041	297
18.00-24	503042	341
15.5-25	503048	242
17.5-25 385/95-25	503050	253
20.5-25	503051	344
23.5-25	503052	395





GROUSER REPAIR KIT
PART # 520110



GROUSER CLOSE-UP

TRYGG

MADE IN NORWAY

FORKLIFT



PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	LIGHT WEIGHT SQUARE 4-LINK *2100/3100FLSL*	ROUND TWIST 2-LINK *1400-2*	SQUARE LINK 2-LINK *1400-2SL*	FORKLIFT CABLE *1400*	TRYGG HELENE *414000*	SUGGESTED TIGHTENER *0200*
	Page 71	Page 72	Page 72	Page 72	Page 73	Pgs. 106-107
250x15	2129FLSL	1408-2	1408-2SL	1400-15	-	0216
300x15	3129FLSL	1409-2	1409-2SL	-	414490	0216
6.00x9	-	1401-2	1401-2SL	-	-	0213
6.50x10	2108FLSL	1401-2	1401-2SL	1400-12	-	0213
7x14	-	1401-2	1401-2SL	-	-	0213
7.00x12	2110FLSL	1403-2	1403-2SL	1400-12	414320	0213
7.00x15	2116FLSL	1404-2	1404-2SL	1400-15	414330	0217
7.50x15	-	1405-2	1405-2SL	1400-15	-	0216
7.50x16	-	1409-2	1409-2SL	1400-15	-	0216
8.15x15	2116FLSL	1407-2	1407-2SL	1400-15	-	0217
8.25x15	2128FLSL	1405-2	1405-2SL	1400-15	414345	0216
20x15	-	1405-2	1405-2SL	1400-15	-	0213
21x7x15	-	1401-2	1401-2SL	1400-12	-	0213
21x8x9	-	1401-2	1401-2SL	1400-12	-	0213
21x8x15	-	1401-2	1401-2SL	1400-12	-	0213
23x10x12	-	1407-2	1407-2SL	1400-15	-	0213
28x8x15	-	1404-2	1404-2SL	1400-15	-	0217
28x9x15	2116FLSL	1403-2	1403-2SL	1400-12	414370	0217
28x12x15	-	1409-2	1409-2SL	1400-15	-	0217
28x12.50-15	3129FLSL	1409-2	1409-2SL	1400-15	-	0217
29x8x15	2116FLSL	1403-2	1403-2SL	1400-12	-	0217
30x8x15	-	1409-2	1409-2SL	1400-15	-	0217
180/85-12	-	1403-2	1403-2SL	1400-12	-	0213
250/70-15	-	1405-2	1405-2SL	1400-15	414380	0217

LIGHT WEIGHT SQUARE LINK

NEW PRODUCT





- **ECONOMY FORKLIFT CHAIN WITH THE STRENGTH OF 5.5MM SQUARE LINK ALLOY**
- **GREAT FOR OUTDOOR / LOT USE, NOT RECOMMENDED FOR CONCRETE FLOORS**
- **REVERSIBLE, CAN BE RUN ON BOTH SIDES**
- **4-LINK SPACING**

TIRE SIZE	4-LINK STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
6.50-10	**2108FLSL**	**15**	**6221SL**	**5.5 MM**
7.50-10; 7.00-12; 25x8.50-14	**2110FLSL**	**19**		
7.00-15; 28x9-15; 29x8-15; 8.15-15 27x8.50-15; 28x9.50-15	**2116FLSL**	**20**		
250-15; 27x10.50-15	**2129FLSL**	**22**	**6225SL**	
8.25-15	**2128FLSL**	**28**		
300-15; 28x12.50-15	**3129FLSL**	**27**	**6229SL**	

RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART #
BY TIRE SIZE ON PAGE 71

ROUND TWIST

- ROUND TWIST LADDER STYLE CHAIN
- 2-LINK SPACING
- CARBON STEEL





TIRE SIZE	2-LINK STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
6.5x10; 21x8x9; 21x7x15; 21x8x15	1401-2	33	6250	7 MM
7.00x12; 28x9x15; 29x8x15; 180/85-12	1403-2	55	6255	8 MM
7.00x15; 28x8x15	1404-2	53	6256	
7.50x15; 8.25x15; 20x15	1405-2	66		
8.15x15; 23x10x12	1407-2	58	6260	
250x15	1408-2	79	6256	
7.50x16; 28x12x15; 30x8x15; 300x15	1409-2	59	6254	7 MM

HEAVY DUTY SQUARE LINK

- SQUARE LINK LADDER STYLE CHAIN
- 2-LINK SPACING
- ALLOY STEEL FOR HEAVY DUTY APPLICATIONS
- GREAT FOR OUTDOOR USE, NOT RECOMMENDED FOR CONCRETE FLOORS





TIRE SIZE	2-LINK STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
6.5x10; 21x8x9; 21x7x15; 21x8x15	1401-2SL	37	6251SL	7 MM
7.00x12; 28x9x15; 29x8x15; 180/85-12	1403-2SL	57	6255SL	8 MM
7.00x15; 28x8x15	1404-2SL	56	6260SL	
7.50x15; 8.25x15; 20x15	1405-2SL	71		
8.15x15; 23x10x12	1407-2SL	60		
250x15	1408-2SL	78		
7.50x16; 28x12x15; 30x8x15; 300x15	1409-2SL	63	6253SL	7 MM

RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGE 71

UNIVERSAL FORKLIFT CABLE

- CABLE CHAIN FOR FORKLIFTS THAT HAVE LIMITED CLEARANCE
- AVAILABLE IN TWO WIDTHS (12" & 15")
- CUT THE LENGTH TO CUSTOM FIT YOUR TIRE
- TWICE THE NUMBER OF CROSS CABLES FOR BETTER COVERAGE AND A SMOOTHER RIDE
- GREAT OPTION FOR INDOOR/OUTDOOR USE

RUBBER TIGHTENERS (PART # 0213) AND 8" CABLE CUTTER INCLUDED.
1 PAIR PER BAG



INCLUDED



TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)	WIDTH (INCHES)	CROSS CHAIN	LENGTH (INCHES)	CAN SHORTEN TO (INCHES)
6.5x10; 7.00x12; 21x8x9; 28x9x15; 29x8x15; 21x8x15; 180/85-12	1400-12	19	12"	8860	84"	44"
250x15; 7.00x15; 7.50x15; 7.50x16; 8.15x15; 8.25x15; 20x15 23x10x12; 28x8x15; 30x8x15	1400-15	27	15"	8862	96"	51"

TRYGG HELENE

- VERSATILE CHAIN FOR FORKLIFTS
- DIAMOND PATTERN PROVIDES MANEUVERABILITY AND GRIP
- WEAR BARS WELDED ON ALL FACING LINKS
- GENTLER ON CONCRETE AND ASPHALT THAN STUDDED CHAINS
- ALLOY STEEL

TRYGG

MADE IN NORWAY

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)	WIRE SIZE
7.00-12	414320	46	7 MM
7.00-15	414330	48	
8.25-15	414345	57	
28x9x15	414370	55	
250/70-15	414380	57	
300-15	414490	70	



WEAR BAR CLOSE-UP



RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGE 71





SKID STEER

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.


TIRE SIZE	ROUND TWIST *1500-2*	SQUARE LINK *1500HDSL-2*	SQUARE LINK H-PATTERN *1500MT*	NORDIC STUDDED *1500STUDDED-2*	TRYGG SMT *602900*	TRYGG SAFETY GRIP *513100*	SUGGESTED TIGHTENER *0200*
	Page 75	Page 75	Page 76	Page 76	Page 77	Page 77	Pgs. 106-107
10x16.5	1501-2	1501HDSL-2	1501MT	1501STUDDED-2	602908	513179	0216
12x16.5	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	602908	513179	0216
12.0-18	1503-2	1503HDSL-2	-	1503STUDDED-2	602909	-	0216
12.5/70-16	1502-2	1502HDSL-2	-	1502STUDDED-2	-	-	0216
14x17.5	1503-2	1503HDSL-2	1503MT	1503STUDDED-2	603092	513387	0216
15-19.5	1504-2	1504HDSL-2	-	1504STUDDED-2	603110	513388	0216
18/625	1504-2	1504HDSL-2	-	1504STUDDED-2	-	-	0218
27x10.50-15	1500-2	1500HDSL-2	-	1500STUDDED-2	-	-	0216
31x5x9	1501-2	1501HDSL-2	-	1501STUDDED-2	-	-	0216
31x6x10	1501-2	1501HDSL-2	-	1501STUDDED-2	-	-	0216
31/10-20	1501-2	1501HDSL-2	-	1501STUDDED-2	-	-	0216
31x12.50-16.5	1502-2	1502HDSL-2	-	1502STUDDED-2	-	-	0216
31x13-16.5	1502-2	1502HDSL-2	-	1502STUDDED-2	-	513179	0216
31x15.5-15	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	602909	513305	0216
33x6x10	1502-2	1502HDSL-2	-	1502STUDDED-2	-	-	0216
33x6x11	1502-2	1502HDSL-2	-	1502STUDDED-2	-	-	0216
33x7x11	1503-2	1503HDSL-2	-	1503STUDDED-2	-	-	0216
33/12-20	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	-	-	0216
33x12.50-16.5	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	-	-	0216
33x15.5-16.5	1503-2	1503HDSL-2	1503MT	1503STUDDED-2	-	513305	0216
36x13.5-15	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	-	513305	0216
36/14-20	1503-2	1503HDSL-2	1503MT	1503STUDDED-2	-	513305	0216
39x15-22.5	1507-2	1507HDSL-2	-	1507STUDDED-2	-	-	0218
260/70-16.5	1501-2	1501HDSL-2	1501MT	1501STUDDED-2	602908	513179	0216
265/70-16.5	1501-2	1501HDSL-2	1501MT	1501STUDDED-2	602908	513179	0216
300/75-15	1502-2	1502HDSL-2	-	1502STUDDED-2	-	-	0216
305/70-16.5	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	602908	513179	0216
315/55-20	1502-2	1502HDSL-2	1502MT	1502STUDDED-2	-	-	0216
320/65-16.5	1502-2	1502HDSL-2	-	1502STUDDED-2	-	-	0216
355/55D625	1507-2	1507HDSL-2	-	1507STUDDED-2	-	-	0216
355/70-17.5	1503-2	1503HDSL-2	1503MT	1503STUDDED-2	-	513387	0216
360/85-20	2615-2	6515-2	6515MT	2915-2	-	-	0218
370/75-28	1508-2	1508HDSL-2	-	1508STUDDED-2	-	-	0220
385/65-19.5	1504-2	1504HDSL-2	-	1504STUDDED-2	-	-	0216
400/75-28	1509-2	1509HDSL-2	-	1509STUDDED-2	-	-	0216
405/70-18	1504-2	1504HDSL-2	-	1504STUDDED-2	602907	513396	0220
405/70-20	1504-2	1504HDSL-2	-	1504STUDDED-2	602907	513396	0218
445/50D710	2615-2	6515-2	6515MT	2915-2	-	-	0218

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408


ROUND TWIST



- ROUND TWIST LADDER STYLE DESIGNED FOR INDUSTRIAL EQUIPMENT
- 2-LINK SPACING OFFERS BETTER TIRE COVERAGE AND A SMOOTHER RIDE
- CARBON STEEL

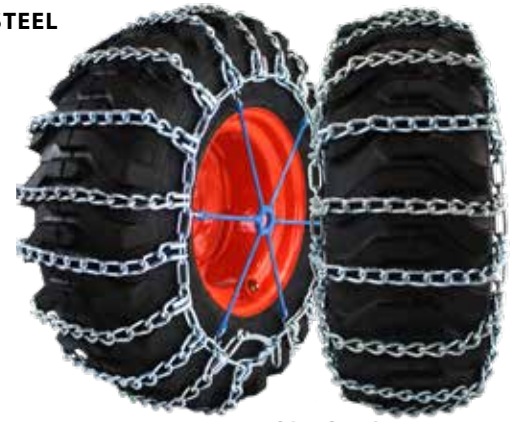

2-LINK SPACING

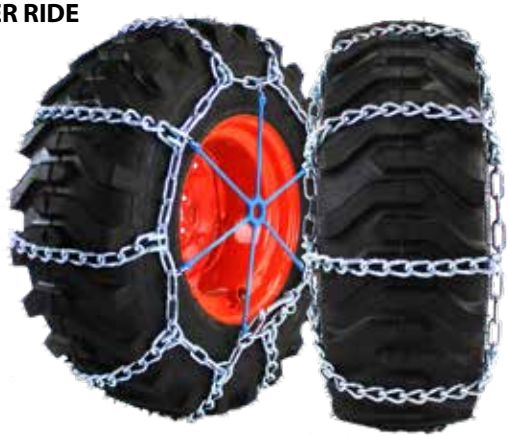

4-LINK SPACING

TIRE SIZE	2-LINK STOCK NUMBER	WEIGHT / PR (LBS)	4-LINK STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
27x10.50-15	1500-2	66	1500	34	6260	8 MM
10x16.5; 31/10-20; 31x6x10; 31x5x9; 260/70-16.5	1501-2	63	1501	37		
12x16.5; 31x15.5-15; 31x13-16.5; 36x13.5-15; 305/70-16.5 33/12-20; 33x6x11; 33x6x10	1502-2	73	1502	43	6268	
14x17.5; 36/14-20; 33x7x11; 33x15.5-16.5; 355/70-17.5	1503-2	88	1503	53		
355/55D625; 39x15-22.5	1507-2	98	1507	61		
370/75-28	1508-2	134	1508	87		
405/70-20; 15-19.5; 18/625; 385/65-19.5	1504-2	130	1504	80	7215	
400/75-28	1509-2	151	1509	95		

SQUARE LINK

RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGE 74

- SQUARE LINK LADDER STYLE DESIGNED FOR INDUSTRIAL EQUIPMENT
- 2-LINK SPACING OFFERS BETTER COVERAGE & INCREASED TRACTION
- ALLOY STEEL PROVIDES MORE TRACTION AND A LONGER LIFE THAN CARBON





2-LINK SPACING




4-LINK SPACING

TIRE SIZE	2-LINK STOCK NUMBER	WEIGHT / PR (LBS)	4-LINK STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
27x10.50-15	1500HDSL-2	81	1500HDSL	45	6260SL	8 MM
10x16.5; 31/10-20; 31x6x10; 31x5x9; 260/70-16.5	1501HDSL-2	75	1501HDSL	44	6263SL	
12x16.5; 31x15.5-15; 31x13-16.5; 36x13.5-15; 305/70-16.5 33/12-20; 33x6x11; 33x6x10	1502HDSL-2	87	1502HDSL	52	6268SL	
14x17.5; 36/14-20; 33x7x11; 33x15.5-16.5; 355/70-17.5	1503HDSL-2	95	1503HDSL	66		
355/55D625; 39x15-22.5	1507HDSL-2	136	1507HDSL	106		
370/75-28	1508HDSL-2	147	1508HDSL	93		
405/70-20; 15-19.5; 18/625; 385/65-19.5	1504HDSL-2	139	1504HDSL	86	7215SL	
400/75-28	1509HDSL-2	166	1509HDSL	102		

MAXTRACK H-PATTERN

- FOR SKID STEER, TELEHANDLER AND MAN LIFT
- ALLOY STEEL FOR INCREASED STRENGTH
- SQUARE LINKS FOR IIMPROVED TRACTION
- H-PATTERN PREVENTS CHAIN FROM FALLING INTO DEEP TIRE LUGS

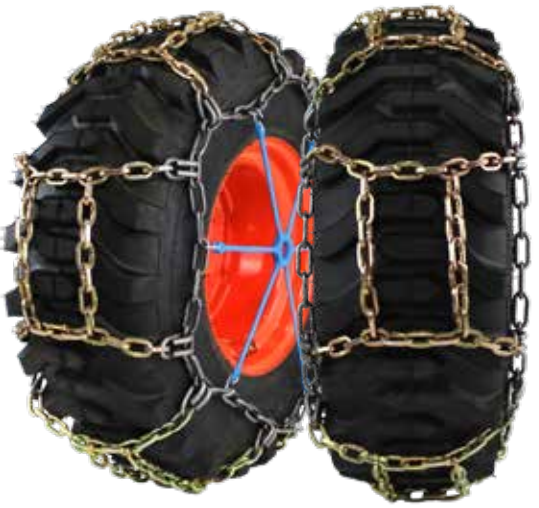



RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGE 74

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
10x16.5; 260/70-16.5; 265/70-16.5	1501MT	58	8914	8 MM
12x16.5; 305/70-16.5	1502MT	70	8918	
14x17.5; 355/70-17.5	1503MT	71		

NORDIC™ STUDDED

- STUDDED LINKS FOR THE MOST CHALLENGING OFF-ROAD APPLICATIONS
- BORON ENHANCED ALLOY STEEL
- 2-LINK SPACING OFFERS BETTER TIRE COVERAGE & INCREASED TRACTION







2-LINK SPACING **4-LINK SPACING**

TIRE SIZE	2-LINK STOCK NUMBER	WEIGHT / PR (LBS)	4-LINK STOCK NUMBER	WEIGHT / PR (LBS)	CROSS CHAIN	WIRE SIZE
27x10.50-15	1500STUDDED-2	85	1500STUDDED	52	6923N	8 MM
10x16.5; 31/10-20; 31x6x10; 31x5x9; 260/70-16.5	1501STUDDED-2	92	1501STUDDED	57		
12x16.5; 31x15.5-15; 31x13-16.5; 36x13.5-15 305/70-16.5; 33/12-20; 33x6x11; 33x6x10	1502STUDDED-2	111	1502STUDDED	66	6926N	
14x17.5; 36/14-20; 33x7x11; 33x15.5-16.5; 355/70-17.5	1503STUDDED-2	117	1503STUDDED	76		
355/55D625; 39x15-22.5	1507STUDDED-2	127	1507STUDDED	82		
370/75-28	1508STUDDED-2	171	1508STUDDED	107		
405/70-20; 15-19.5; 18/625; 385/65-19.5	1504STUDDED-2	176	1504STUDDED	70	7915	
400/75-28	1509STUDDED-2	218	1509STUDDED	122		

RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGE 74

QUALITY CHAIN CORP
MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408

TRYGG SMT FLEXI

- STUDDED LINKS FOR EXTREME TRACTION IN OFF-ROAD APPLICATIONS
- ALLOY STEEL ENHANCED WITH BORON, NICKEL, CHROMIUM AND MANGANESE
- FULLY HARDENED FOR MAXIMUM DURABILITY
- 10 MM HOOKS AND 8 MM SIDE CHAIN
- A PERFECT FIT WITHOUT THE USE OF TOOLS
- CAN BE CUSTOM FIT TO YOUR TIRE WHETHER BRAND NEW OR WORN DOWN
  EXTENSION KITS AVAILABLE, SEE PAGE 108



5/16"- 8 MM

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
10-16.5; 12-16.5; 260/70-16.5	602908	108
12.0-18; 31x15.5-15	602909	146

TRYGG

MADE IN NORWAY

TRYGG SAFETY GRIP

- TRYGG SAFETY GRIP 7 MM IS A VERSATILE CHAIN SUITABLE FOR ALL APPLICATIONS
- PERFECT FOR ON-ROAD SERVICE AND YARD WORK
- LIGHT WEIGHT, WHICH MAKES FREQUENT MOUNTING AND DISMOUNTING EASIER
- WEAR BARS ON EVERY OTHER LINK INCREASE GRIP AND PROLONG SERVICE LIFE
- HARD SPINNING MAY DAMAGE THE CHAIN

TRYGG SAFETY GRIP 7 MM IS MADE TO FIT SEVERAL DIFFERENT TIRE SIZES. IT IS NORMAL FOR THE USER TO HAVE TO CUT THE CHAIN TO GET A PROPER FIT.



9/32"- 7 MM

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
10-16.5; 12-16.5; 33x13-16.5; 260/70-16.5	513179	57
31x15.5-15; 33x15.5-16.5; 36x13.5-15; 36/14-20	513305	64
14-17.5	513387	71
15-19.5	513388	78
405/70-18; 405/70-20	513396	75



TRYGG

MADE IN NORWAY

RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART #
BY TIRE SIZE ON PAGE 74



ATV / UTV

TRYGG ALL TERRAIN 6

TRYGG

MADE IN NORWAY

- OVERSIZED STUDS PENETRATE ICE AND FROZEN GROUND
- FULL FLOATING DIAMOND PATTERN PROTECTS AGAINST TIRE WEAR

PACKED 1 PAIR PER BAG

0213



0216



0217





PLEASE NOTE: This is only a guide.
Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

1/4" - 6 MM

TIRE SIZE	STOCK NUMBER	SUGGESTED TIGHTENER	TIRE SIZE	STOCK NUMBER	SUGGESTED TIGHTENER	TIRE SIZE	STOCK NUMBER	SUGGESTED TIGHTENER
22x8x12	425220	0213	24x12x12	425240	0216	26x8x12	425225	0217
22x10x10	425220	0213	25x8x12	425230	0217	26x8x14	425225	0217
22x11x8	425220	0217	25x9x12	425230	0217	26x10x12	425250	0216
23x8.5x12	425220	0213	25x10x10	425230	0216	26x10x14	425250	0216
23x10x10	425220	0217	25x10x12	425230	0216	26x10.5x12	425250	0216
23x10x12	425220	0217	25x10.5x12	425230	0217	26x11x12	425250	0216
24x9x10	425220	0217	25x11x10	425240	0216	26x12x12	425250	0217
24x9x11	425220	0217	25x11x12	425240	0216	27x9x12	425250	0217
24x9x12	425220	0217	25x12x9	425240	0216	27x9x14	425250	0217
24x10x11	425230	0217	25x12x10	425240	0216	27x11x14	425250	0217
24x11x10	425230	0216	25x12.5x10	425250	0216	27x12x12	425250	0217
24x11.5x10	425230	0216	25x12.5x12	425250	0216	28x12x12	425255	0216

ATV & UTV

RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGES 78-79

V-BAR

- LADDER STYLE WITH ICE BREAKERS
- 2-LINK AND 4-LINK SPACING

U-GRIP

- DIAMOND PATTERN WITH U-SHAPED STUDS

PACKED 1 PAIR PER BAG



0213



0216



0217



4-LINK V-BAR - 5.3 MM



2-LINK V-BAR - 5.3 MM



U-GRIP - 5.75 MM

*2829 = 5.5 MM / **3828 & 3831 = 7 MM

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	4-LINK V-BAR LADDER	2-LINK V-BAR LADDER	U-GRIP DIAMOND PATTERN	SUGGESTED TIGHTENER	TIRE SIZE	4-LINK V-BAR LADDER	2-LINK V-BAR LADDER	U-GRIP DIAMOND PATTERN	SUGGESTED TIGHTENER
20x10x9	ATV-A	ATV-A-2	ATV-DBA	0213	25x10x12	ATV-C	ATV-C-2	ATV-DBB	0216
20x11x9	ATV-A	ATV-A-2	ATV-DBA	0213	25x10.5x12	ATV-C	ATV-C-2	ATV-DBD	0217
21x9x12	ATV-A	ATV-A-2	ATV-DBA	0213	25x11x9	ATV-C	ATV-C-2	ATV-DBD	0216
21x10x8	ATV-A	ATV-A-2	ATV-DBA	0213	25x11x10	ATV-C	ATV-C-2	ATV-DBD	0216
22x7x10	ATV-A	ATV-A-2	ATV-DBA	0213	25x11x12	ATV-C	ATV-C-2	ATV-DBD	0216
22x7x11	ATV-A	ATV-A-2	ATV-DBA	0213	25x12x9	ATV-C	ATV-C-2	ATV-DBC	0216
22x9x8	ATV-A	ATV-A-2	ATV-DBA	0213	25x12x10	ATV-C	ATV-C-2	ATV-DBC	0216
22x9x10	ATV-A	ATV-A-2	ATV-DBA	0213	25x12x12	ATV-C	ATV-C-2	ATV-DBC	0216
22x9x11	ATV-A	ATV-A-2	ATV-DBA	0213	25x12.5x10	ATV-D	ATV-D-2	ATV-DBC	0216
22x10x8	ATV-A	ATV-A-2	ATV-DBA	0213	25x12.5x12	ATV-D	ATV-D-2	ATV-DBC	0216
22x10x9	ATV-A	ATV-A-2	ATV-DBA	0213	26x8x12	ATV-B	ATV-B-2	ATV-DBB	0217
22x10x10	ATV-A	ATV-A-2	ATV-DBA	0213	26x8x14	ATV-B	ATV-B-2	ATV-DBE	0217
22x11x8	ATV-A	ATV-A-2	ATV-DBA	0217	26x9x12	ATV-C	ATV-C-2	ATV-DBD	0216
22x11x9	ATV-A	ATV-A-2	ATV-DBA	0217	26x9x14	ATV-C	ATV-C-2	ATV-DBD	0216
23x8x10	ATV-A	ATV-A-2	ATV-DBA	0213	26x10x12	ATV-C	ATV-C-2	ATV-DBD	0216
23x8x11	ATV-A	ATV-A-2	ATV-DBA	0213	26x10x14	ATV-C	ATV-C-2	ATV-DBD	0216
23x8x12	ATV-A	ATV-A-2	ATV-DBA	0213	26x10.5x12	ATV-C	ATV-C-2	ATV-DBD	0216
23x8.5x12	ATV-A	ATV-A-2	ATV-DBA	0213	26x11x12	ATV-D	ATV-D-2	ATV-DBC	0216
23x10x10	ATV-A	ATV-A-2	ATV-DBA	0217	26x11x14	ATV-D	ATV-D-2	ATV-DBC	0216
23x10x12	ATV-A	ATV-A-2	ATV-DBA	0217	26x12x12	ATV-D	ATV-D-2	ATV-DBD	0217
23x10.5x12	ATV-A	ATV-A-2	ATV-DBA	0217	27x8.5x15	ATV-D	ATV-D-2	ATV-DBD	0217
23x11x10	ATV-A	ATV-A-2	ATV-DBA	0217	27x9x12	ATV-D	ATV-D-2	ATV-DBD	0217
24x8x11	ATV-A	ATV-A-2	ATV-DBA	0213	27x9x14	ATV-D	ATV-D-2	ATV-DBD	0217
24x8x12	ATV-A	ATV-A-2	ATV-DBB	0213	27x10x12	ATV-D	ATV-D-2	ATV-DBD	0216
24x9x10	ATV-B	ATV-B-2	ATV-DBB	0217	27x11x12	ATV-D	ATV-D-2	ATV-DBD	0217
24x9x11	ATV-B	ATV-B-2	ATV-DBA	0217	27x11x14	ATV-D	ATV-D-2	ATV-DBD	0217
24x9x12	ATV-B	ATV-B-2	ATV-DBB	0217	27x12x12	ATV-D	ATV-D-2	ATV-DBF	0217
24x10x11	ATV-B	ATV-B-2	ATV-DBB	0217	28x9x14	ATV-D	ATV-D-2	ATV-DBD	0216
24x10x12	ATV-C	ATV-C-2	ATV-DBB	0217	28x10x12	ATV-D	ATV-D-2	ATV-DBD	0216
24x11x9	ATV-C	ATV-C-2	ATV-DBA	0216	28x11x14	ATV-D	ATV-D-2	ATV-DBD	0216
24x11x10	ATV-C	ATV-C-2	ATV-DBB	0216	28x12x12	ATV-D	ATV-D-2	ATV-DBF	0216
24x11x12	ATV-B	ATV-B-2	ATV-DBB	0216	29x9x14	ATV-D	ATV-D-2	-	0216
24x11.5x10	ATV-C	ATV-C-2	ATV-DBB	0216	29x11x14	2829*	2829-2*	-	0216
24x12x12	ATV-C	ATV-C-2	-	0216	30x10x15	2829*	2829-2*	-	0216
24x13x9	ATV-C	ATV-C-2	-	0216	31x10x14	3828**	3828-2**	-	0216
24x14x12	2829*	2829-2*	-	0216	32x10x14	3828**	3828-2**	-	0216
25x8x12	ATV-B	ATV-B-2	ATV-DBA	0217	35x10x14	3831**	3831-2**	-	0216
25x8.5x12	-	-	ATV-DBE	0213	240/75-10	ATV-B	ATV-B-2	ATV-DBB	0217
25x10x10	ATV-C	ATV-C-2	ATV-DBB	0216	290/65-10	ATV-C	ATV-C-2	ATV-DBD	0217
25x10x11	ATV-C	ATV-C-2	ATV-DBB	0216	270/60-12	ATV-C	ATV-C-2	ATV-DBB	0216



INSTALLATION TOOLS & TIGHTENER


STOCK NUMBER	APPLICATION	STANDARD PACKAGING	WEIGHT PER PKG (LBS)
350100	TRYGG Skidder Installation Tool - Extends to 17.5"	1 EACH	9
2506HD	Heavy Duty Installation Tool - Extends to 15"		15
671425	TRYGG Balder Track Installation Tool - Extends to 35"		30
2508-MT86	Genesis Track Installation Tool - Extends to 17.5"		27
0296	Link Shackle Tightener	1 PAIR	26


350100


2506HD


671425


2508-MT86


0296

NORDIC™ SKIDDER

RING STYLE
- ALLOY STEEL16 MM OR 18 MM CONNECTING LINKS & 28 MM RINGS

TIGHT RING STYLE
- RINGS SPACED CLOSER TOGETHER FOR BETTER CONTINUAL TRACTION
- 16 MM,18 MM OR 25 MM CONNECTING LINKS WITH 28 MM RINGS

NET STYLE
- ALLOY STEEL 16 MM OR 18 MM STUDDED CROSS PATTERNS THAT FORM A NET OVER THE TIRE

SHACKLE TIGHTENERS ARE SOLD SEPARATELY
PART # 0296
SEE PAGES 106-107



NR - NORDIC RING



NTR - NORDIC TIGHT RING



NN - NORDIC NET

5/8" - 16 MM

TIRE SIZE	NORDIC RING STOCK NUMBER	NORDIC RING WT PER PAIR (LBS)	NORDIC TIGHT RING STOCK NUMBER	NORDIC TIGHT RING WT PER PAIR (LBS)	NORDIC NET STOCK NUMBER	NORDIC NET WT PER PAIR (LBS)
23.1-26	NR231-16	662	NTR231-16	960	NN231-16	970
24.5-32; 28L-26	NR245-16	899	-	-	NN245-16	1015
30.5-32	NR305-16	991	-	-	NN305-16	1250

11/16" - 18 MM

TIRE SIZE	STOCK NUMBER	WT PER PAIR (LBS)	STOCK NUMBER	WT PER PAIR (LBS)	STOCK NUMBER	WT PER PAIR (LBS)
24.5-32; 28L-26	NR245-18	1023	NTR245-18	1237	NN245-18	1250
30.5-32	NR305-18	1152	NTR305-18	1267	NN305-18	1545
35.5-32	NR355-18	1255	-	-	NN355-18	1650

1" - 25 MM

TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)	STOCK NUMBER	WT/ PR (LBS)
30.5-32	-	-	NTR305-25	1980	-	-
35.5-32	-	-	NTR355-25	2180	-	-
73x44x32	-	-	NTR730-25	2104	-	-

TRYGG TROLL

TRYGG

MADE IN NORWAY

- TRYGG TROLL IS DESIGNED WITH LARGER GAUGE LINKS AND STUDS AROUND THE CROWN OF THE TIRE WHERE THE PRESSURE AND CONTACT IS THE GREATEST
- STIFF MESH PATTERNS MINIMIZE MOVEMENT AND KEEP STUDS VERTICAL
- DEEP CASE HARDENED ALLOY STEEL ENSURES DURABILITY AND LONG SERVICE LIFE

SHACKLE TIGHTENERS ARE SOLD SEPARATELY
PART # 0296
SEE PAGES 106-107

7/8" - 22 MM SINGLE DIAMOND

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)
30.5-32	628971	1458
35.5-32	628982	1882

7/8" - 22 MM DOUBLE DIAMOND

TIRE SIZE	STOCK NUMBER	WEIGHT PER PAIR (LBS)
30.5-32	628571	1823
780/50-28.5	628573	1527
35.5-32	628582	2242



SINGLE DIAMOND



DOUBLE DIAMOND

CENTER DIAMOND
7/8" - 22 MM LINKS
1" - 25 MM STUDS



SHOULDER DIAMOND
3/4" - 19 MM LINKS
7/8" - 22 MM STUDS





FORESTRY

TRYGG SMT

TRYGG

MADE IN NORWAY

- SMT PATTERN HOLDS THE CHAIN ON TOP OF THE TIRE LUGS, KEEPING THE STUDS IN CONSTANT CONTACT WITH THE TERRAIN
- FOR 16 MM OPTIONAL TIGHTENING RAIL AVAILABLE, PART #336040

SHACKLE TIGHTENERS ARE SOLD SEPARATELY
PART # 0296
SEE PAGES 106-107

5/8" - 16 MM

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
23.1-26; 18.4-34	608965	717
24.5-32; 28L-26	608968	860
30.5-32	608969	932

3/4" - 19 MM

TIRE SIZE	STOCK NUMBER	WEIGHT / PR (LBS)
24.5-32	609968	1058
30.5-32	609969	1135
35.5-32	609971	1289



SMT STUDDED PATTERN CLOSE-UP



MORE TRYGG FORESTRY OPTIONS AVAILABE, CALL FOR DETAILS

NORDIC™ GENESIS TRACKS

THE GENESIS TRACK SYSTEM WAS DESIGNED TO MAXIMIZE OPERATIONAL EFFICIENCY WHILE REDUCING COSTS AND MINIMIZING DOWNTIME.

THE FULLY FORGED 32 MM CONNECTING LINKS OFFER UNMATCHED DEPENDABILITY AND WEAR LIFE.

GENESIS TRACKS CAN TACKLE ANY TERRAIN YOU THROW AT THEM.



NOKIAN FOREST KING F2

TIRE SIZE	STOCK NUMBER	GROUSER PROFILE	WEIGHT PER PAIR (LBS)
710/45-26.5	MT710/45-3231	MOUNTAIN MT86	4920
750/55-26.5	MT750/55-3231	MOUNTAIN MT86	5840
780/50-28.5	MT780/50-3231	MOUNTAIN MT86	5840

KITS AVAILABLE FOR SINGLE WHEEL CONVERSION - CALL FOR DETAILS

TRACK LOCK INSTALLATION TOOL SOLD SEPARATELY

PART # 2508-MT86
SEE PAGE 80



CONNECTOR PART #'S:

KONNECT-125
125 MM



KONNECT-175
175 MM



KONNECT-225
225 MM



TRYGG BALDER SINGLE WHEEL TRACKS

MADE IN NORWAY

- STEEP SLOPE RUNNER
- CLIMBING GRIP AND STABILITY ON RUGGED MOUNTAINS
- POWERS THROUGH SNOW, MUD AND ICE
- EXTENDS LIFE OF WORN TIRES
- OUTLASTS CHAIN BY UP TO DOUBLE THE HOURS
- MADE OF BORON ENHANCED ALLOY STEEL

TRYGG

BALDER SKID SINGLE WHEEL

TIRE SIZE	STOCK NUMBER	CROSS BAR LENGTH (IN)	GROUSER PROFILE	WEIGHT PER PAIR (LBS)
30.5-32	670072	38"	26 MM - 1" DOUBLE CLEAT	3024
35.5-32	670083	44"	26 MM - 1" DOUBLE CLEAT	3261



CROSSBAR WITH RAISED RIDGE

THREE REMOVABLE CROSSBARS ALLOW THE OPERATOR TO KEEP THE TIGHTNESS ADJUSTED PROPERLY AS THE TIRES AND TRACKS WEAR OVER TIME



DOUBLE CLEATS ON EVERY CROSSBAR
1-3/4" X 7/8" X 1-3/8"



TRACK LOCK
8 TRACK LOCKS INCLUDED

671110 - SMALL TRACK LOCK
671120 - MEDIUM TRACK LOCK
671130 - LARGE TRACK LOCK



TRACK LOCK
INSTALLATION TOOL
SOLD SEPARATELY

PART # 671425
SEE PAGE 80



NORDIC™ DOUBLE DIAMOND U-GRIP

- INCREDIBLE DURABILITY DUE TO OUR UNIQUE HEAT TREATMENT PROCESS AND LARGE MATERIAL SIZE
- TOP MOUNTED U-STUDS MAXIMIZE TRACTION AND PREVENT THE CHAIN FROM ROLLING OVER
- DDU CHAINS ARE GREAT FOR OPERATORS LOOKING FOR OPTIMAL TRACTION AND WEAR LIFE
- DOUBLE DIAMOND PATTERN FORMS A NET OVER THE TIRE PROVIDING EXCELLENT COVERAGE
- 19 MM LINKS WITH 20 MM U STUDS



U-GRIP CLOSE-UP

3/4" - 19 MM DDU -DOUBLE DIAMOND

TIRE SIZE	STOCK NUMBER	WT / PR(LBS)
30.5-32	DDU3053234	1460



HEAVY DUTY INSTALLATION TOOL SOLD SEPARATELY

PART # 2506HD
SEE PAGE 80






TRACTOR
5820

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST *0800* Page 92	SQUARE LINK *0800SL* Page 92	DUO GRIP H-PATTERN *DUO200* Page 93	DUO GRIP H-PATTERN V-BAR *DUO200V* Page 93	LIGHT WT ALLOY DUO H-PATTERN *DUO200-7* Page 93	TRYGG SWISS FLEXI *570000* Page 94	TRYGG SMT FLEXI *602000 603000* Page 95	MAXTRACK SQUARE LINK H-PATTERN *6500MT* Page 97	PREMIUM STUDDED H-PATTERN *2900SHP* Page 97	SUGGESTED TIGHTENER *0200* Pgs. 106-107
7.50-18	0836	0836SL	DUO239	DUO239V	DUO239-7	-	-	-	-	0216
7.50-20	0836	0836SL	DUO239	DUO239V	DUO239-7	-	-	-	-	0216
8.3-16	3227	3127SLC	-	-	-	-	-	-	-	0216
8.3-24	0822	-	-	-	-	-	602905	-	-	0216
9.5-16	0829	0829SL	-	-	-	-	-	-	-	0216
9.5-18	0822	-	-	-	-	-	-	-	-	0216
9.5-20	0832	0832SL	DUO214	-	DUO214-7	-	602905	-	-	0216
9.5-24	0832	0832SL	DUO214	-	DUO214-7	-	602905	-	-	0218
9.5-28	0836	0836SL	DUO214	-	DUO214-7	-	-	-	-	0218
9.5-32	0838	0838SL	DUO226	-	DUO226-7	-	-	-	-	0218
9.5-48	-	-	DUO236	-	DUO236-7	-	-	-	-	0294
10/75-15.5	1501	1501HDSL	-	-	-	-	602908	1501MT	-	0216
10-16.5	1501	1501HDSL	-	-	-	-	602908	1501MT	-	0216
10-32	-	-	DUO218	-	DUO218-7	-	-	-	-	0218
10-38	-	-	DUO232	-	DUO232-7	-	-	-	-	0218
10.5/80-18	0832	0832SL	-	-	-	-	-	-	-	0216
11.00-16	0822	-	-	-	-	-	-	-	-	0218
11-28	-	-	DUO218	-	DUO218-7	-	-	-	-	0218
11-36	-	-	DUO232	-	DUO232-7	-	-	-	-	0220
11-38	-	-	DUO232	-	DUO232-7	-	-	-	-	0220
11.2-16	-	-	DUO214	-	DUO214-7	-	-	-	-	0216
11.2-24	0838	0838SL	DUO226	-	DUO226-7	570926	602902	-	-	0218
11.2-28	0838	0838SL	DUO229	-	DUO229-7	570921	602902	-	-	0218
11.2-32	-	-	DUO218	-	DUO218-7	-	-	-	-	0220
11.2-34	0846	-	DUO224	-	DUO224-7	-	-	-	-	0294
11.2-36	0846	-	DUO224	-	DUO224-7	-	-	-	-	0294
11.2-38	0862	-	DUO232	-	DUO232-7	-	-	-	-	0294
11.2-44	-	-	DUO236	-	DUO236-7	-	-	-	-	0294
12-28	-	-	DUO242	DUO242V	DUO242-7	-	-	-	-	0218
12-36	-	-	DUO246	DUO246V	DUO246-7	-	-	-	-	0294
12-16.5	1502	1502HDSL	-	-	-	-	602908	1502MT	-	0216
12.4-16	0836	0836SL	DUO239	DUO239V	DUO239-7	-	-	-	-	0216
12.4-24	0859	0859SL	DUO242	DUO242V	DUO242-7	570921	603910	-	-	0220
12.4-28	0856	-	DUO218	-	DUO218-7	570921	603910	-	-	0220
12.4-34	0876	-	DUO262	DUO262V	-	-	-	-	-	0220
12.4-36	0862	-	DUO232	-	DUO232-7	-	603904	-	-	0294
12.4-38	0862	-	DUO232	-	DUO232-7	-	603904	-	-	0294
12.4-40	-	-	DUO246	DUO246V	DUO246-7	-	-	-	-	0294
12.4-42	0866	-	DUO246	DUO246V	DUO246-7	-	-	-	-	0294
12.5-18	0834	0834SL	DUO210	-	DUO210-7	570926	602909	-	-	0218
12.5/80-18	0834	0834SL	DUO210	-	DUO210-7	-	602906	-	-	0216
12.5-20	0856	-	DUO229	-	DUO229-7	-	-	-	-	0218
13.5-16.1	0838	0838SL	DUO214	-	DUO214-7	-	-	-	-	0218
13.6-16	0850	-	-	-	-	570926	602904	-	-	0216
13.6-24	0856	-	DUO240	DUO240V	DUO240-7	570921	603907	-	-	0220
13.6-26	0858	-	DUO240	DUO240V	DUO240-7	-	-	-	-	0220
13.6-28	0859	0859SL	DUO242	DUO242V	DUO242-7	570921	603903	6512MT	2912SHP	0220
13.6-36	0866	-	DUO246	DUO246V	DUO246-7	-	603904	-	-	0294
13.6-38	0866	-	DUO246	DUO246V	DUO246-7	-	603904	-	-	0294
13.9-36	0866	-	DUO246	DUO246V	DUO246-7	-	-	-	-	0294
14-17.5	1503	1503HDSL	-	-	-	-	603092	1503MT	-	0216
14.5-20	0858	-	-	-	-	-	603907	-	-	0218
14.9-24	0859	0859SL	DUO242	DUO242V	DUO242-7	570935	603903	6512MT	2912SHP	0220
14.9-26	0869	-	DUO250	DUO250V	DUO250-7	570935	603903	-	-	0220

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST *0800* Page 92	SQUARE LINK *0800SL* Page 92	DUO GRIP H-PATTERN *DUO200* Page 93	DUO GRIP H-PATTERN V-BAR *DUO200V* Page 93	LIGHT WT ALLOY DUO H-PATTERN *DUO200-7* Page 93	TRYGG SWISS FLEXI *570000* Page 94	TRYGG SMT FLEXI *602000 603000* Page 95	MAXTRACK SQUARE LINK H-PATTERN *6500MT* Page 97	PREMIUM STUDDED H-PATTERN *2900SHP* Page 97	SUGGESTED TIGHTENER *0200* Pgs. 106-107
14.9-28	0869	-	DUO250	DUO250V	DUO250-7	570935	603906	-	-	0294
14.9-30	0876	-	DUO252	DUO252V	DUO252-7	570935	603906	-	-	0294
14.9-38	0871	-	DUO254	-	-	-	603901	-	-	0294
14.9-46	-	-	DUO256	DUO256V	-	-	-	-	-	0296
15-19.5 R4 TIRE	0859	0859SL	DUO239	DUO239V	DUO239-7	-	603110	-	-	0218
15-22.5	0852	-	-	-	-	-	-	-	-	0218
15.5-38	0879	-	DUO270	DUO270V	-	-	603901	-	-	0294
16.9-24	0874	0874SL	DUO262	DUO262V	-	570945	603906	6515MT	2915SHP	0218
16.9-26	0876	-	DUO262	DUO262V	-	-	603906	6515MT	2915SHP	0294
16.9-28 R1-R4	0876	-	DUO262	DUO262V	-	570950	603901	6515MT	2915SHP	0294
16.9-30	0877	-	DUO266	DUO266V	-	570950	603901	-	-	0294
16.9-32	0877	-	DUO266	DUO266V	-	-	-	-	-	0294
16.9-34	0879	-	DUO270	DUO270V	-	570950	603901	-	-	0294
16.9-38	0880	-	DUO272	DUO272V	-	570950	603902	-	-	0296
16.9-46	-	-	DUO256	DUO256V	-	-	-	-	-	0296
17.5L-24	0874	0874SL	DUO262	DUO262V	-	-	603911	6515MT	2915SHP	0220
18.4-16.1	0881	-	DUO264	DUO264V	-	-	-	-	-	0218
18.4-24	0883	0883SL	DUO268	DUO268V	-	-	-	-	-	0220
18.4-26	0883	0883SL	DUO268	DUO268V	-	570950	-	-	-	0294
18.4-28	0884	-	DUO269	DUO269V	-	-	-	-	-	0294
18.4-30	0885	0885SL	DUO271	DUO271V	-	570950	603902	6533MT	2933SHP	0294
18.4-34	0887	-	DUO273	DUO273V	-	570950	603902	6545MT	2945SHP	0294
18.4-38	0889	0889SL	DUO272	DUO272V	-	-	603909	-	-	0296
18.4-42	0894	0894SL	DUO277	DUO277V	-	-	-	-	-	0296
18.4-46	-	-	DUO277	DUO277V	-	-	-	-	-	0296
19.5L-24	0883	0883SL	DUO268	DUO268V	-	-	603911	6527MT	2927SHP	0220
19.5L-28	0876	-	DUO262	DUO262V	-	-	-	-	-	0294
19.5L-30	0877	-	DUO266	DUO266V	-	-	-	-	-	0294
20.5-46	-	-	DUO286	-	-	-	-	-	-	0296
20.8-34	0890	-	DUO272	DUO272V	-	-	-	6545MT	2945SHP	0296
20.8-38	0892	-	DUO276	-	-	-	-	-	-	0296
20.8-42	-	-	DUO286	-	-	-	-	-	-	0296
21L-24	0885	0885SL	DUO271	DUO271V	-	-	-	6533MT	2933SHP	0294
21.5-16	0882	-	-	-	-	-	-	-	-	0218
21.5L-16.1	0882	-	-	-	-	-	-	-	-	0218
23.1-26	0891	-	DUO280	-	-	570970	-	-	-	0294
23.1-28	-	-	DUO280	-	-	-	-	-	-	0294
23.1-30	0893	-	DUO281	-	-	-	-	-	-	0294
23.1-34	0895	-	DUO282	-	-	-	-	-	-	0296
24.5-32	-	-	DUO278	-	-	-	-	-	-	0296
40/19-19.5	-	-	DUO264	DUO264V	-	-	-	-	-	0218
41/14-20	0858	-	DUO240	DUO240V	DUO240-7	-	602904	-	-	0218
43/16-20	0852	-	DUO239	DUO239V	DUO239-7	570940	602907	-	-	0218
44X18.00-20	0874	0874SL	-	-	-	-	-	-	-	0218
260/70-16.5	1501	1501HDSL	-	-	-	-	602908	1501MT	-	0216
320/65-18	0836	0836SL	DUO239	DUO239V	DUO239-7	-	-	-	-	0216
360/70-18	0838	0838SL	-	-	-	-	-	-	-	0218
365/70-18	0838	0838SL	-	-	-	-	-	-	-	0218
335/80-18	0834	0834SL	DUO210	-	DUO210-7	570926	602909	-	-	0218
340/80-18	0836	0836SL	-	-	-	570926	-	-	-	0218
300/70-20	0832	0832SL	DUO214	-	DUO214-7	-	602906	-	-	0218
360/70-20	0838	0838SL	DUO218	-	DUO218-7	570926	602904	-	-	0218
400/70-20	0858	-	-	-	-	-	603907	-	-	0218
320/85-20	0838	0838SL	DUO218	-	DUO218-7	570926	-	-	-	0218

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST *0800*	SQUARE LINK *0800SL*	DUO GRIP H-PATTERN *DUO200*	DUO GRIP H-PATTERN V-BAR *DUO200V*	LIGHT WT ALLOY DUO H-PATTERN *DUO200-7*	TRYGG SWISS FLEXI *570000*	TRYGG SMT FLEXI *602000* *603000*	MAXTRACK SQUARE LINK H-PATTERN *6500MT*	PREMIUM STUDDED H-PATTERN *2900SHP*	SUGGESTED TIGHTENER *0200*
	Page 92	Page 92	Page 93	Page 93	Page 93	Page 94	Page 95	Page 97	Page 97	Pgs. 106-107
420/65-24	0859	0859SL	DUO242	DUO242V	DUO242-7	570940	603905	-	-	0220
440/65-24	0858	-	DUO240	DUO240V	DUO240-7	570940	603905	-	-	0220
540/65-24	0874	0874SL	-	-	-	570965	-	-	-	0294
320/70-24	0838	0838SL	DUO226	-	DUO226-7	570926	602902	-	-	0218
360/70-24	0852	-	DUO242	DUO242V	DUO242-7	570921	603907	-	-	0220
380/70-24	0858	-	DUO240	DUO240V	DUO240-7	570930	603907	-	-	0220
400/70-24	0858	-	DUO240	DUO240V	DUO240-7	-	-	-	-	0220
420/70-24	0869	-	DUO250	DUO250V	DUO250-7	570945	603905	6512MT	2912SHP	0294
440/70-24	0874	0874SL	DUO262	DUO262V	-	570945	603905	-	-	0220
445/70-24	0874	0874SL	DUO262	DUO262V	-	570945	603905	-	-	0220
460/70-24	0874	0874SL	DUO262	DUO262V	-	570945	602910	-	-	0220
480/70-24	0874	0874SL	DUO262	DUO262V	-	570955	603911	-	-	0294
495/70-24	0883	0883SL	DUO268	DUO268V	-	570955	603911	-	-	0294
500/70-24	0883	0883SL	DUO268	DUO268V	-	570955	603911	-	-	0294
400/80-24	0859	0859SL	DUO242	DUO242V	DUO242-7	570935	603905	-	-	0220
240/85-24	0832	0832SL	DUO214	-	DUO214-7	-	602905	-	-	0218
280/85-24	0838	0838SL	DUO226	-	DUO226-7	570926	602902	-	-	0218
320/85-24	0852	-	DUO242	DUO242V	DUO242-7	570921	603910	-	-	0218
340/85-24	0858	-	DUO240	DUO240V	DUO240-7	570921	603907	-	-	0218
380/85-24	0859	0859SL	DUO242	DUO242V	DUO242-7	570935	603903	-	-	0220
420/85-24	0874	0874SL	DUO262	DUO262V	-	570945	603906	-	-	0220
540/65-26	0876	-	DUO262	DUO262V	-	570965	-	-	-	0294
420/70-26	0876	-	DUO262	DUO262V	-	-	-	-	-	0294
480/70-26	-	-	DUO262	DUO262V	-	-	-	-	-	0294
520/70-26	0883	0883SL	DUO268	DUO268V	-	-	-	-	-	0294
480/80-26	0883	0883SL	DUO268	DUO268V	-	570955	-	-	-	0294
420/85-26	0876	-	DUO262	DUO262V	-	-	603906	-	-	0294
460/85-26	0883	0883SL	DUO268	DUO268V	-	570950	-	-	-	0294
420/65-28	0856	-	DUO218	-	DUO218-7	-	-	-	-	0220
440/65-28	0859	0859SL	DUO242	DUO242V	DUO242-7	570945	603905	-	-	0294
480/65-28	0869	-	DUO250	DUO250V	DUO250-7	570955	603911	-	-	0294
540/65-28	0876	-	DUO262	DUO262V	-	570965	-	-	-	0294
600/65-28	0895	-	DUO282	-	-	-	-	-	-	0294
320/70-28	0838	0838SL	DUO229	-	DUO229-7	570921	-	-	-	0220
360/70-28	0856	-	DUO218	-	DUO218-7	570921	-	-	-	0220
380/70-28	0859	0859SL	DUO242	DUO242V	DUO242-7	570935	603903	-	-	0220
480/70-28	0876	-	DUO262	DUO262V	-	570955	-	-	-	0294
420/80-28	0869	-	DUO250	DUO250V	DUO250-7	-	-	-	-	0294
440/80-28	0884	-	DUO269	DUO269V	-	-	603901	-	-	0220
320/85-28	0856	-	DUO218	-	DUO218-7	570921	603910	-	-	0220
340/85-28	0859	0859SL	DUO242	DUO242V	DUO242-7	570921	603903	-	-	0220
380/85-28	0869	-	DUO250	DUO250V	DUO250-7	570935	603906	-	-	0294
420/85-28	0876	-	DUO262	DUO262V	-	570950	603901	-	-	0294
540/65-30	0877	-	DUO266	DUO266V	-	570970	603908	-	-	0294
420/70-30	0876	-	DUO252	DUO252V	DUO252-7	570945	603906	-	-	0294
480/70-30	0877	-	DUO266	DUO266V	-	570960	603908	-	-	0294
520/70-30	0885	0885SL	DUO271	DUO271V	-	570970	603908	-	-	0296
620/70-30	0892	-	-	-	-	-	-	-	-	0294
620/75-30	0893	-	DUO281	-	-	-	-	-	-	0294
380/85-30	0876	-	DUO252	DUO252V	DUO252-7	570935	603906	-	-	0220
420/85-30	0877	-	DUO266	DUO266V	-	570950	603901	-	-	0294
460/85-30	0885	0885SL	DUO271	DUO271V	-	570950	603901	-	-	0294
480/85-30	-	-	-	-	-	-	-	6533MT	2933SHP	0294
420/90-30	0877	-	DUO266	DUO266V	-	-	-	-	-	0294

PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST *0800* Page 92	SQUARE LINK *0800SL* Page 92	DUO GRIP H-PATTERN *DUO200* Page 93	DUO GRIP H-PATTERN V-BAR *DUO200V* Page 93	LIGHT WT ALLOY DUO H-PATTERN *DUO200-7* Page 93	TRYGG SWISS FLEXI *570000* Page 94	TRYGG SMT FLEXI *602000 603000* Page 95	MAXTRACK SQUARE LINK H-PATTERN *6500MT* Page 97	PREMIUM STUDDED H-PATTERN *2900SHP* Page 97	SUGGESTED TIGHTENER *0200* Pgs. 106-107
650/75-32	-	-	DUO278	-	-	-	-	-	-	0296
230/90-32	-	-	DUO226	-	DUO226-7	-	-	-	-	0218
210/95-32	0856	-	DUO240	DUO240V	DUO240-7	-	-	-	-	0218
230/95-32	0856	-	DUO226	-	DUO226-7	-	-	-	-	0218
540/65-34	0885	0885SL	DUO271	DUO271V	-	570970	603908	-	-	0294
600/65-34	0887	-	DUO273	DUO273V	-	570975	603909	-	-	0296
480/70-34	0879	-	DUO270	DUO270V	-	570960	603908	-	-	0294
500/70-34	0879	-	DUO270	DUO270V	-	-	-	-	-	0296
520/70-34	0887	-	DUO273	DUO273V	-	570970	603909	-	-	0296
620/75-34	0895	-	DUO282	-	-	-	-	-	-	0296
320/85-34	0876	-	DUO262	DUO262V	-	-	-	-	-	0220
380/85-34	0879	-	DUO266	DUO266V	-	-	-	-	-	0294
385/85-34	0885	0885SL	DUO271	DUO271V	-	-	-	-	-	0220
420/85-34	0879	-	DUO270	DUO270V	-	570950	603902	-	-	0294
460/85-34	0887	-	DUO273	DUO273V	-	570950	603902	-	-	0294
480/85-34	0887	-	DUO273	DUO273V	-	-	-	-	-	0294
290/95-34	0876	-	DUO262	DUO262V	-	-	-	-	-	0220
320/95-34	0876	-	DUO262	DUO262V	-	-	-	-	-	0220
320/85-36	0877	-	DUO266	DUO266V	-	-	603904	-	-	0294
340/85-36	0885	0885SL	DUO271	DUO271V	-	-	603904	-	-	0220
210/95-36	0856	-	DUO218	-	DUO218-7	-	-	-	-	0220
270/95-36	0876	-	DUO262	DUO262V	-	-	-	-	-	0220
540/65-38	0880	-	DUO272	DUO272V	-	570970	603909	-	-	0296
650/65-38	0892	-	DUO276	-	-	570980	-	-	-	0296
480/70-38	0880	-	DUO272	DUO272V	-	-	603909	-	-	0296
580/70-38	0892	-	DUO276	-	-	570975	-	-	-	0296
710/70-38	-	-	DUO286	-	-	-	-	-	-	0296
380/80-38	0871	-	DUO254	-	-	-	-	-	-	0294
480/80-38	0889	0889SL	DUO272	DUO272V	-	-	603909	-	-	0296
320/85-38	0885	0885SL	DUO271	DUO271V	-	-	603904	-	-	0220
340/85-38	0879	-	DUO270	DUO270V	-	-	603904	-	-	0294
380/85-38	0879	-	DUO270	DUO270V	-	-	603901	-	-	0294
420/85-38	0880	-	DUO272	DUO272V	-	570950	603902	-	-	0296
460/85-38	0889	0889SL	DUO272	DUO272V	-	-	603909	-	-	0296
520/85-38	0892	-	DUO276	-	-	-	-	-	-	0296
290/90-38	0862	-	DUO232	-	DUO232-7	-	-	-	-	0294
230/95-38	-	-	DUO272	DUO272V	-	-	-	-	-	0220
270/95-38	-	-	DUO266	DUO266V	-	-	-	-	-	0294
230/95-40	-	-	DUO266	DUO266V	-	-	-	-	-	0220
650/65-42	-	-	DUO286	-	-	570980	-	-	-	0296
580/70-42	-	-	DUO286	-	-	-	-	-	-	0296
620/70-42	-	-	DUO286	-	-	-	-	-	-	0296
480/80-42	0894	0894SL	DUO277	DUO277V	-	-	-	-	-	0296
520/85-42	-	-	DUO286	-	-	-	-	-	2975SHP	0296
320/90-42	0880	-	DUO272	DUO272V	-	-	-	-	-	0294
420/80-46	-	-	DUO256	DUO256V	-	-	-	-	-	0296
480/80-46	0894	0894SL	DUO277	DUO277V	-	-	-	-	-	0296
520/85-46	-	-	DUO286	-	-	-	-	-	-	0296
380/90-46	0892	-	DUO256	DUO256V	-	-	-	-	-	0294
230/95-48	-	-	DUO236	-	DUO236-7	-	-	-	-	0294



ROUND TWIST & SQUARE LINK

- FOR TRACTORS AND BACKHOES
- AVAILABLE IN 4-LINK OR 2-LINK SPACING
- ENTRY LEVEL ROUND TWIST CARBON OR UPGRADE TO STRONGER SQUARE LINK ALLOY

PACKED 1/2 PAIR PER BAG

(3227 PACKED 1 PAIR PER BAG)

RUBBER OR SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PGS 88-91

NOTE: We can custom build most chains if a size or part number is not listed.



ROUND TWIST 4-LINK PICTURED



SQUARE LINK 2-LINK PICTURED

⚠ **NOTE: NOT INTENDED FOR LOADER/GRADER USE.**

4-LINK ROUND TWIST	WEIGHT/ PR (LBS)	2-LINK ROUND TWIST	WEIGHT/ PR (LBS)	ROUND TWIST CROSS CHAIN	4-LINK SQUARE LINK	WEIGHT/ PR (LBS)	2-LINK SQUARE LINK	WEIGHT/ PR (LBS)	SQUARE LINK CROSS CHAIN	WIRE SIZE
3227	35	-	-	6253	3127SLC	39	-	-	6253SL	7 MM
0822	72	-	-	6434	-	-	-	-	6434SL	10 MM
0829	60	0829-2	118		0829SL	60	0829SL-2	96		
0832	78	0832-2	125		0832SL	58	0832SL-2	100		
0834	81	0834-2	142	6445	0834SL	98	0834SL-2	151	6445SL	
0836	82	0836-2	141		0836SL	85	0836SL-2	152		
0838	104	-	-		0838SL	85	0838SL-2	152		
0846	121	-	-		-	-	-	-		
0850	76	-	-	7420	-	-	-	-	-	
0852	92	-	-	6445	-	-	-	-	-	
0856	102	-	-		-	-	-	-		
0858	108	-	-	7420	-	-	-	-	7420SL	
0859	112	0859-2	191		0859SL	125	0859SL-2	200		
0862	124	-	-	6445	-	-	-	-	-	
0866	146	-	-	7420	-	-	-	-	-	
0869	118	-	-		-	-	-	-		
0871	154	-	-		-	-	-	-		
0874	134	0874-2	248	7426	0874SL	134	0874SL-2	240	E6530S	
0876	150	-	-		-	-	-	-		
0877	155	-	-		-	-	-	-		
0879	162	-	-		-	-	-	-		
0880	168	-	-		-	-	-	-		
0881	134	-	-	9562	-	-	-	-	E6540SH	11 MM
0882	152	-	-		-	-	-	-		
0883	168	0883-2	315		0883SL	213	0883SL-2	380		
0884	186	-	-		-	-	-	-		
0885	180	0885-2	320		0885SL	208	0885SL-2	326		
0887	213	-	-		-	-	-	-		
0889	220	0889-2	421		0889SL	220	0889SL-2	352		
0890	236	-	-	6650	-	-	-	-	-	
0891	212	-	-	9567	-	-	-	-	-	
0892	256	-	-	6650	-	-	-	-	-	
0893	243	-	-	9567	-	-	-	-	-	
0894	240	0894-2	455	9562	0894SL	226	0894SL-2	438	E6540SH	
0895	266	-	-	9567	-	-	-	-	-	

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408

DUO GRIP H-PATTERN

- FOR TRACTORS AND BACKHOES
- H-PATTERN KEEPS CHAIN ON TOP OF TREAD AND PREVENTS IT FROM FALLING INTO TIRE LUGS
- V-BAR "ICE BREAKERS" FOR INCREASED TRACTION ON ICE AND PACKED SNOW
- 7 MM ALLOY FOR USE ON TRACTORS WITH LIMITED CLEARANCE AROUND FENDERS
- CARBON STEEL

PACKED 1/2 PAIR PER BAG

RUBBER OR SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PGS 88-91

⚠ NOTE: NOT INTENDED FOR LOADER/GRADER OR SKIDDER USE.



ROUND TWIST DUO GRIP H-PATTERN



V-BAR DUO GRIP H-PATTERN



7 MM LIGHT WEIGHT DUO GRIP H-PATTERN

STOCK NUMBER	WEIGHT/ PR (LBS)	CROSS CHAIN	V-BAR STOCK NUMBER	WEIGHT/ PR (LBS)	V-BAR CROSS CHAIN	WIRE SIZE	LIGHT WT ALLOY STOCK NUMBER	WEIGHT/ PR (LBS)	LIGHT WT ALLOY CROSS CHAIN	WIRE SIZE
DUO210	103	DUO293	-	-	-	10 MM	DUO210-7	87	DUO293LW	7 MM
DUO214	104	DUO292	-	-	-		DUO214-7	83	DUO292LW	
DUO218	135	DUO293	-	-	-		DUO218-7	106	DUO293LW	
DUO224	138	DUO292	-	-	-		DUO224-7	110	DUO292LW	
DUO226	114		-	-			DUO226-7	92		
DUO229	138	DUO293	-	-	-		DUO229-7	110	DUO293LW	
DUO232	164		-	-			DUO232-7	131		
DUO236	203		-	-			DUO236-7	162		
DUO239	114	DUO295	DUO239V	124	DUO295V		DUO239-7	94	DUO295LW	
DUO240	122		DUO240V	134			DUO240-7	98		
DUO242	136	DUO294	DUO242V	155	DUO294V		DUO242-7	109	DUO294LW	
DUO246	172		DUO246V	190			DUO246-7	146		
DUO250	136	DUO295	DUO250V	150	DUO295V		DUO250-7	109	DUO295LW	
DUO252	164		DUO252V	180			DUO252-7	139		
DUO254	184	DUO296	-	-	-					
DUO256	222	DUO297	DUO256V	244	DUO297V					
DUO262	156		DUO262V	176						
DUO264	118	DUO298	DUO264V	130	DUO298V					
DUO266	172	DUO297	DUO266V	190	DUO297V					
DUO268	153	DUO298	DUO268V	168	DUO298V					
DUO269	170		DUO269V	195						
DUO270	180	DUO297	DUO270V	198	DUO297V					
DUO271	176	DUO298	DUO271V	200	DUO298V					
DUO272	214		DUO272V	238						
DUO273	190		DUO273V	222						
DUO276	226	DUO299	-	-	-					
DUO277	263	DUO298	DUO277V	295	DUO298V					
DUO278	258	DUO301	-	-	-					
DUO280	186	DUO299	-	-	-					
DUO281	206		-	-						
DUO282	208		-	-						
DUO286	268	DUO301	-	-	-					



V-BAR PATTERN CLOSE-UP



TRYGG SWISS FLEXI

- GREAT FOR PLOWING
- COMBINES THE COMFORT OF A LIGHT CHAIN WITH THE SUPERIOR STRENGTH OF SUPER HARDENED WEAR BARS
- EXCELLENT GRIP AND LONG SERVICE LIFE
- TENSIONING CHAIN AND MOUNTING INSTRUCTIONS INCLUDED
- EXTENSION KITS AVAILABLE, SEE PAGE 108

LENGTH MAY NEED TO BE ADJUSTED ACCORDING TO INSTRUCTIONS WHEN MOUNTING FOR THE FIRST TIME



SWISS FLEXI WEAR BAR



SWISS FLEXI PATTERN



TRYGG

MADE IN NORWAY

5/16" - 8 MM

TIRE SIZE	STOCK NUMBER	WT / PR(LBS)
11.2-24; 12.5-18; 13.6-16; 320/70-24; 320/85-20 360/70-20; 335/80-18; 340/80-18; 280/85-24	570926	205
380/70-24	570930	227
16.9-24; 420/70-30; 420/85-24; 420/70-24; 420/70-30 440/65-28; 440/70-24; 445/70-24; 460/70-24	570945	316

TRYGG SMT

- OVERSIZED STUDS INCREASE GRIP AND LAST LONGER
- SMT PATTERN HOLDS THE CHAIN ON TOP OF THE TIRE LUGS, KEEPING THE STUDS IN CONSTANT CONTACT WITH THE TERRAIN
- FITS MORE THAN ONE TIRE SIZE
- OPTIONAL TIGHTENING RAIL AVAILABLE, PART #336040



TIRE SIZE	STOCK NUMBER	INCHES	MM	WEIGHT / PR (LBS)
18.4-30; 16.9-30; 16.9-34	606552	1/2"	13	442
23.1-34; 20.8-38	608968	5/8"	16	860



RUBBER OR SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PGS 88-91

TRYGG

MADE IN NORWAY

TRYGG SMT FLEXI

- A PERFECT FIT WITHOUT THE USE OF TOOLS
- SMT FLEXI USES STEEL ENHANCED WITH BORON, NICKEL, CHROMIUM AND MANGANESE; FULLY HARDENED FOR MAXIMUM DURABILITY
- 10 MM HOOKS AND 8 MM SIDE CHAIN
- OPTIONAL TIGHTENING RAIL AVAILABLE, PART #336030
- EXTENSION KITS AVAILABLE, SEE PAGE 108





5/16"- 8 MM

TIRE SIZE	STOCK NUMBER	WT / PR(LBS)
12.4-28; 13.6-28; 320/85-28; 340/85-28	602901	167
11.2-24; 11.2-28; 12.4-24; 280/85-24; 320/70-24; 320/85-24	602902	147
13.6-24; 14.9-24; 360/70-24; 380/70-24; 380/85-24 400/80-24	602903	165
13.6-16; 320/70-24; 360/70-20	602904	143
8.3-24; 9.5-20; 9.5-24; 240/85-24	602905	130
12.5/80-18; 300/70-20	602906	130
43/16-20	602907	156
260/70-16.5; 10-16.5; 12-16.5	602908	108
12.5-18; 335/80-18	602909	146
420/70-24; 460/70-24; 445/70-24; 440/65-24 420/65-24; 440/70-24; 440/65-28	602910	187
19.5L-24; 480/65-24; 480/70-24; 495/70-24; 500/70-24 480/65-28	602911	213



SMT FLEXI LINK
PART # 335508



TIGHTENING RAIL
PART # 336030

3/8"- 9.5 MM

TIRE SIZE	STOCK NUMBER	WT / PR(LBS)
14.9-38; 15.5-38; 16.9-28; 16.9-30; 16.9-34; 18.4-30 420/85-28; 420/85-30; 460/85-30; 440/80-28; 380/85-38	603901	262
16.9-38; 18.4-30; 18.4-34; 420/85-34; 460/85-34 480/70-34; 480/70-38; 420/85-38	603902	282
13.6-28; 14.9-24; 14.9-26; 380/70-28; 380/85-24; 380/85-28	603903	216
12.4-36; 12.4-38; 13.6-36; 13.6-38; 320/85-36; 340/85-36 320/85-38; 340/85-38	603904	235
440/65-24; 440/65-28; 400/80-24; 420/65-24; 420/70-24 440/70-24; 445/70-24	603905	207
14.9-28; 14.9-30; 16.9-24; 16.9-26; 380/85-28; 380/85-30 420/70-30; 420/85-24; 420/85-26	603906	222
13.6-24; 14.5-20; 340/85-24; 360/70-24; 380/70-24 400/70-20	603907	183
480/70-30; 480/70-34; 520/70-30; 540/65-30; 540/65-34	603908	273
18.4-38; 460/85-30; 460/85-38; 480/70-38; 520/70-34 540/65-38; 600/65-34	603909	317
12.4-24; 12.4-28; 13.6-24; 320/85-24; 320/85-28	603910	194
19.5L-24; 480/65-28; 480/70-24; 495/70-24 500/70-24	603911	233

TRYGG

MADE IN NORWAY

RUBBER OR SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PGS 88-91

TRYGG FAST TRAC

- RECTANGULAR STUDS PROVIDE 30% LARGER GRIP-AREA
- THE PROFESSIONAL CHOICE FOR SNOW CLEARING
- WORKS WELL WITH LIMITED SPACE UNDER THE FENDERS
- REMOVABLE TAIL SECTION AND SIDE CHAIN LINKS FOR EASY ADJUSTMENT



TRYGG

MADE IN NORWAY

5/16" - 8 MM

TIRE SIZE	STOCK NUMBER	WT / PR(LBS)
14.9-28; 14.9-30; 14.9-38; 15.5-38; 16.9-24 16.9-26; 16.9-28; 16.9-30; 16.9-34; 18.4-26 380/85-28; 380/85-30; 420/70-30; 420/85-28 420/85-30; 420/85-34; 440/80-28; 480/65-28 480/70-28	581020	154
18.4-26; 480/65-28; 480/70-24; 480/70-28 540/65-24; 540/65-28	581025	143
14.9-24; 43/16-20; 340/85-28; 360/70-24 360/70-28; 380/70-24; 380/70-28; 380/85-24 420/65-24; 420/70-24; 420/85-24; 440/65-24 440/65-28	581030	124
11.2-24; 11.2-28; 12.4-24; 12.4-28; 13.6-24 13.6-28; 320/70-28; 320/85-24; 320/85-28 340/85-24; 360/70-20	581035	110
11.2-16; 12.4-16; 13.6-16; 320/85-24 320/85-28	581040	103



SQUARE STUDS CLOSE-UP

TRYGG SAFETY GRIP

- SAFETY GRIP 7 MM IS A VERSATILE CHAIN FOR ALL APPLICATIONS
- PERFECT FOR ON-ROAD SERVICE AND YARD WORK
- LIGHT WEIGHT, MAKING MOUNTING AND DISMOUNTING EASIER
- WEAR BARS ON EVERY OTHER LINK INCREASE GRIP AND PROLONG SERVICE LIFE

TRYGG SAFETY GRIP 7 MM IS MADE TO FIT SEVERAL DIFFERENT TIRE SIZES. IT IS NORMAL FOR THE USER TO HAVE TO CUT THE CHAIN TO GET A PROPER FIT.



9/32" - 7 MM

TIRE SIZE	STOCK NUMBER	WT / PR(LBS)
8.3-24; 10-16.5; 12-16.5	513179	57
10.5/80-18	513302	71
11.2-16; 12.4-16	513305	64
19.5L-24; 480/70-24; 500/70-24	513313	62
11.2-24; 12.5-18; 14-17.5; 300/70-20 320/85-20	513387	71
15-19.5; 14.5-20	513388	78
400/70-20; 43/16-20; 14.5-20	513396	75
44x18.00-20; 400/80-24; 420/65-24 420/70-24; 440/65-24; 440/70-24 460/70-24	513397	95
14.9-26; 14.9-30; 16.9-24; 380/85-24	513399	101
12.5/80-18; 9.5-20	513504	64
11.2-28; 12.4-24; 13.6-24; 320/85-24	513512	86
13.6-28; 14.9-24; 340/85-28	513522	95

RUBBER OR SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PGS 88-91

TRYGG

MADE IN NORWAY

MAXTRACK H-PATTERN

- FOR TRACTORS AND BACKHOES
- ALLOY STEEL FOR INCREASED STRENGTH
- H-PATTERN PREVENTS CHAIN FROM FALLING INTO DEEP TIRE LUGS
- SQUARE LINKS IN A LINK-OVER-LINK DESIGN FOR IMPROVED TRACTION

⚠ NOTE: 1500MT SERIES ARE A SQUARE LINK H-PATTERN DESIGN. LINK-OVER-LINK ONLY AVAILABLE ON 6500MT SERIES.



6500MT SERIES PICTURED



LINK-OVER-LINK CLOSE-UP

5/16" - 8 MM

TIRE SIZE	STOCK NUMBER	WT/ PR (LBS)	CROSS CHAIN
10x16.5	1501MT	58	8914
12x16.5	1502MT	70	8918
14x17.5	1503MT	71	

3/8" - 10 MM / 7/16" - 11 MM / 17/32" - 13.5 MM

TIRE SIZE	3/8" STOCK NUMBER	3/8" WT/ PR (LBS)	3/8" CROSS CHAIN	7/16" STOCK NUMBER	7/16" WT/ PR (LBS)	7/16" CROSS CHAIN	17/32" STOCK NUMBER	17/32" WT/ PR (LBS)	17/32" CROSS CHAIN
13.6-28; 420/70-24; 14.9-24	6512MT-10	190	8902	6515MT-11	296	8903	-	-	-
17.5L-24; 16.9-24; 16.9-28	6515MT-10	214					-	-	-
19.5L-24	6527MT-10	236		6527MT-11	356	8904	-	-	-
18.4-30; 21L-24; 480/85-30	-	-	-	6533MT-11	346	8906	6533MT-13	410	8908
18.4-34; 20.8-34	-	-	-	6545MT-11	384		6545MT-13	472	8909

NORDIC™ STUDDED H-PATTERN

- FOR TRACTORS AND BACKHOES
- AGGRESSIVE TRACTION FOR EXTREME CONDITIONS
- PREMIUM ALLOY STEEL FOR MAXIMUM STRENGTH
- STUDDED LINK WITH EXTRA HARD TIPS
- H-PATTERN PREVENTS CHAIN FROM FALLING INTO DEEP TIRE LUGS

RUBBER OR SHACKLE STYLE TIGHTENERS ARE SOLD SEPARATELY

SUGGESTED PART # BY TIRE SIZE ON PGS 88-91



STUDDED LINK CLOSE-UP



3/8" - 10 MM / 7/16" - 11 MM / 17/32" - 13.5 MM

TIRE SIZE	3/8" STOCK NUMBER	3/8" WT/ PR (LBS)	3/8" CROSS CHAIN	7/16" STOCK NUMBER	7/16" WT/ PR (LBS)	7/16" CROSS CHAIN	17/32" STOCK NUMBER	17/32" WT/ PR (LBS)	17/32" CROSS CHAIN
13.6-28; 420/70-24; 14.9-24	2912SHP-10	222	8502	2915SHP-11	354	8503	-	-	-
17.5L-24; 16.9-24; 16.9-28	2915SHP-10	232					-	-	-
19.5L-24	2927SHP-10	258		2927SHP-11	395	8504	-	-	-
18.4-30; 21L-24; 480/85-30	-	-	-	2933SHP-11	366	8505	2933SHP-13	400	8508
18.4-34; 20.8-34	-	-	-	2945SHP-11	386	8506	2945SHP-13	490	
520/85-42	-	-	-	-	-	-	2975SHP-13	801	8511

GARDEN TRACTOR & SNOW BLOWER



PLEASE NOTE: This is only a guide. Actual fitments and clearances may vary. Please check prior to use.

NOTE: We can custom build most chains if a size or part number is not listed in this fitment chart. Call or visit www.qualitychaincorp.com for more info.

Quality Chain Corp. suggests that you check your vehicle owner's manual for information about the use of tire chains.

TIRE SIZE	ROUND TWIST LADDER *1300*	ROUND TWIST H-PATTERN *HP1300*	SUGGESTED TIGHTENER *0200*
	Page 99	Page 99	Pgs. 106-107
3.40x3.00-5	1309	-	-
4-8	1301	-	0213
4.10x3.50-4	1309	-	-
4.10x3.50-5	1317	-	-
4.10x3.50-6	1317	-	-
4.80-8	1301	-	0213
5-8	1322	-	0213
5.70-8	1322	-	0213
5.90-15	1303	HP1303	0217
6-12	1311	HP1311	0217
6-16	1307	HP1307	0216
7-12	1304	HP1304	0217
7-16	1307	HP1307	0216
7.2-16	1307	HP1307	0216
8-12	1304	HP1304	0216
8-15	1307	HP1307	0216
8-16	1325	HP1325	0216
10-3	1306	-	-
10-2.75	1306	-	-
10.25-3.25	1306	-	-
10.5-2.75	1306	-	-
12-3	1317	-	-
12x3.50-6	1317	-	-
12x4-6	1317	-	-

TIRE SIZE	ROUND TWIST LADDER *1300*	ROUND TWIST H-PATTERN *HP1300*	SUGGESTED TIGHTENER *0200*
	Page 99	Page 99	Pgs. 106-107
12x7-4	1321	-	-
12-12	1318	HP1318	-
12.25x3.50-6	1317	-	-
12.5x4.50-6	1321	-	-
13x4-5	1321	-	-
13x4-6	1321	-	-
13x5-6	1321	-	-
13x5-7	1321	-	-
13x5-8	1321	-	-
13x6.50-6	1301	-	-
14x4-6	1301	-	-
15x5-6	1314	-	-
15x6-6	1314	-	-
16x6.50-8	1308	HP1308	-
18x6.50-8	1312	HP1312	0213
18x8.50-8	1326	HP1326	0213
18x8.50-10	1326	HP1326	0213
18x9.50-8	1323	HP1323	0213
20x8-8	1308	HP1308	0213
20x8-10	1308	HP1308	0213
20x10-8	1302	HP1302	0213
20x10-10	1302	HP1302	0213
22x7-12	1304	HP1304	0213
22x9.50-12	1303	HP1303	0213

TIRE SIZE	ROUND TWIST LADDER *1300*	ROUND TWIST H-PATTERN *HP1300*	SUGGESTED TIGHTENER *0200*
	Page 99	Page 99	Pgs. 106-107
22x9.50-15	1303	HP1303	0213
22x10-8	1308	HP1308	0217
22x10-10	1308	HP1308	0217
23x7.50-12	1311	HP1311	0217
23x8.50-12	1304	HP1304	0217
23x8.50-14	1304	HP1304	0217
23x9.50-12	1303	HP1303	0217
23x10.50-12	1303	HP1303	0217
24x8.50-14	1303	HP1303	0217
24x12-12	1318	HP1318	0217
25x8.50-14	1307	HP1307	0217
25x8.50-15	1307	HP1307	0217
26x12-12	1318	HP1318	0216
27x8.50-14	1307	HP1307	0216
27x8.50-15	1307	HP1307	0216
27x12-12	1318	HP1318	0216
28x8.50-15	1307	HP1307	0216
29x12-15	1325	HP1325	0216
33x12.50-15	1325	HP1325	0216
215/50-10	1326	HP1326	0213
280/70-16	1325	HP1325	0216
305/60-12	1318	HP1318	0216

ROUND TWIST LADDER STYLE & H-PATTERN

- DESIGNED FOR SNOW BLOWERS & GARDEN TRACTORS
- 2-LINK SPACED LADDER STYLE OR H-PATTERN HOLDS CHAIN ON TOP OF TREAD ON DEEP LUGGED TIRES
- CARBON STEEL

PACKED 1 PAIR PER BAG

LADDER STYLE SPECS

STOCK NUMBER	WEIGHT/ PR (LBS)	OVERALL LENGTH (INCHES)	X-CHAIN WIDTH (INCHES)	X-CHAIN PER 1/2 PAIR	WIRE DIAMETER (MM)
1301	8	37.5"	9.15"	13	5.2 MM
1302	21	47.3"	15.15"	15	5.2 MM
1303	25	57"	14.15"	19	5.2 MM
1304	24	57"	12.15"	19	5.2 MM
1306	5	22.5"	5.51"	9	4 MM
1307	19	77.5"	12.74"	27	4.5 MM
1308	19	50"	12.15"	16	5.2 MM
1309	4	24.6"	6.14"	10	4 MM
1311	19	57.5"	11.15"	20	5.2 MM
1312	10	44.5"	11.15"	14	5.2 MM
1314	12	38.8"	10.15"	13	5.2 MM
1317	5	31.1"	6.14"	13	4 MM
1318	29	65.3"	16.15"	21	5.2 MM
1321	8	32.5"	10.23"	11	4.5 MM
1322	12	46.3"	10.15"	15	5.2 MM
1323	17	37.5"	15.15"	12	5.2 MM
1325	64	79.7"	20.5"	20	7 MM
1326	10	38.9"	12.94"	13	5.2 MM

H-PATTERN SPECS

STOCK NUMBER	WEIGHT/ PR (LBS)	OVERALL LENGTH (INCHES)	CROSS CHAIN PATTERNS	PATTERNS PER 1/2 PAIR	WIRE DIAMETER (MM)
-	-	-	-	-	-
HP1302	26	47.3"	6229HP	7	5.5 MM
HP1303	26	57"	6229HP	9	5.5 MM
HP1304	34	57"	6221HP	11	5.5 MM
-	-	-	-	-	-
HP1307	42	77.5"	6221HP	13	5.5 MM
HP1308	26	50"	6221HP	8	5.5 MM
-	-	-	-	-	-
HP1311	28	57"	6221HP	9	5.5 MM
HP1312	21	44.5"	6221HP	7	5.5 MM
-	-	-	-	-	-
-	-	-	-	-	-
HP1318	40	65.3"	6229HP	10	5.5 MM
-	-	-	-	-	-
-	-	-	-	-	-
HP1323	23	37.5"	6229HP	6	5.5 MM
HP1325	75	79.7"	6258HP	11	7 MM
HP1326	20	38.9"	6221HP	6	5.5 MM

New Specs & Fitments!








RUBBER TIGHTENERS ARE SOLD SEPARATELY
SUGGESTED PART # BY TIRE SIZE ON PAGE 98



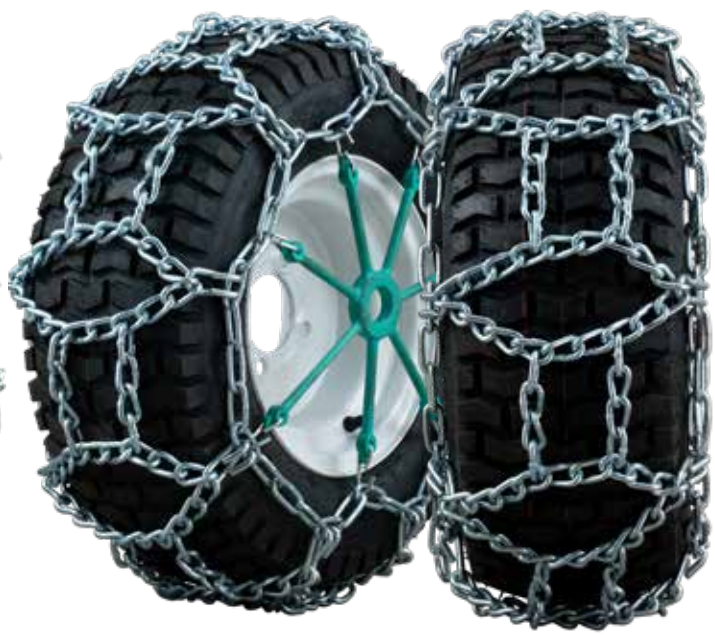



REPLACEMENT PARTS & ACCESSORIES

CONTINUOUS CROSS CHAIN

HARDENED ROUND TWIST
REGULAR AND PREMIUM



REGULAR



PREMIUM

REGULAR HARDENED **PREMIUM HARDENED**

STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
30177	24	-	-	1/0	11/64"	4.5 MM	.177	100'
30207	39	-	-	3/0	13/64"	5.2 MM	.207	
30218	49	A30218	49	4/0	7/32"	5.5 MM	.218	
30234	51	A30234	51	5/0	1/4"	6.4 MM	.234	
30281	66	-	-	6/0	9/32"	7 MM	.281	
30312	40	A30312	40	7/0	5/16"	8 MM	.312	50'
30375	64	A30375	64	9/0	3/8"	10 MM	.375	
30437	92	A30437	92	11/0	7/16"	11 MM	.437	
30531	140	A30531	140	14/0	17/32"	13.5 MM	.531	

V-BAR
REGULAR AND PREMIUM



REGULAR V-BAR



PREMIUM V-BAR

REGULAR V-BAR **PREMIUM V-BAR**

STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
38218	51	A38218	58	4/0	7/32"	5.5 MM	.218	100'
38281	43	A38281	44	6/0	9/32"	7 MM	.281	50'
38312	54	A38312	56	7/0	5/16"	8 MM	.312	
38375	80	A38375	82	9/0	3/8"	10 MM	.375	

ROUND TWIST ALLOY AND
PREMIUM STUDDED ALLOY



ROUND TWIST ALLOY



PREMIUM STUDDED ALLOY

ROUND TWIST ALLOY **PREMIUM STUDDED ALLOY**

STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
33218	49	-	-	4/0	7/32"	5.5 MM	.218	100'
33281	66	39281	94	6/0	9/32"	7 MM	.281	
33312	40	39312	62	7/0	5/16"	8 MM	.312	50'
33375	64	39375	90	9/0	3/8"	10 MM	.375	
33437	92	39437	98	11/0	7/16"	11 MM	.437	
33531	140	39531	150	14/0	17/32"	13.5 MM	.531	

SQUARE LINK ALLOY AND
TWISTED SQUARE LINK ALLOY



SQUARE LINK ALLOY



PREMIUM SQUARE LINK ALLOY



TWISTED SQUARE LINK ALLOY

SQUARE LINK ALLOY **PREMIUM SQUARE LINK ALLOY** **TWISTED SQUARE LINK ALLOY**

STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
31218	47	A31218	48	34218	47	4/0	7/32"	5.5 MM	.218	100'
31281	37	-	-	34281	38	6/0	9/32"	7 MM	.281	
31312	48	A31312	51	34312	54	7/0	5/16"	8 MM	.312	
31375	83	A31375	85	34375	89	9/0	3/8"	10 MM	.375	50'
31437	98	A31437	114	34437	115	11/0	7/16"	11 MM	.437	
31531	155	A31531	180	-	-	14/0	17/32"	13.5 MM	.531	

CONTINUOUS SIDE CHAIN

REGULAR AND PREMIUM UNHARDENED SIDE CHAIN AND HARDENED SIDE CHAIN



REGULAR




PREMIUM

REGULAR UNHARDENED		PREMIUM UNHARDENED		HARDENED						
STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
40177	23	-	-	-	-	1/0	11/64"	4.5 MM	.177	100'
40192	25	-	-	-	-	2/0	3/16"	4.8 MM	.192	
40218	35	A40218	35	AL40218H	35	4/0	7/32"	5.5 MM	.218	
40281	53	A40281	53	AL40281H	59	6/0	9/32"	7 MM	.281	
40312	69	A40312	69	AL40312H	70	7/0	5/16"	8 MM	.312	
40375	53	A40375	53	AL40375H	52	9/0	3/8"	10 MM	.375	
40437	75	A40437	75	AL40437H	75	11/0	7/16"	11 MM	.437	50'
40531	118	A40531	118	AL40531H	120	14/0	17/32"	13.5 MM	.531	

CAM SIDE CHAIN

PRE-CUT WITH FOUR CAMS AND ONE END FASTENER PER RAIL

STOCK NUMBER	WEIGHT / PKG (LBS)	END FASTENER	LENGTH (INCHES)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
40218C	31	15003	86"	4/0	7/32"	5.5 MM	.218	5 PCS
40281C	61	15NR6	120"	6/0	9/32"	7 MM	.281	
40312C	86			7/0	5/16"	8 MM	.312	



REPLACEMENT CAMS FOR SIDE CHAIN

STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
CAM6	HEAVY TRUCK	1	6/0	9/32"	7 MM	.281	1 PC
CAM7			7/0	5/16"	8 MM	.312	



HOOKS

HARDENED CROSS CHAIN HOOKS

REGULAR	PREMIUM							
STOCK NUMBER	STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
20177	-	PASSENGER	2	1/0	11/64"	4.5 MM	.177	50 PCS
20230	A20230		4	3/0	15/64"	5.9 MM	.230	
20250	A20250	LIGHT TRUCK	5	5/0	1/4"	6.4 MM	.250	
20312	A20312AL	MEDIUM TRUCK	8	7/0	5/16"	8 MM	.312	
20375	A20375AL	HEAVY TRUCK	12	9/0	3/8"	10 MM	.375	
20406	A20406	TRACTOR	17	10/0	13/32"	10.3 MM	.406	
20437	A20437AL	GRADER	22	11/0	7/16"	11 MM	.437	
20437S	-	SHORT PITCH	23	11/0	7/16"	11 MM	.437	
20531	A20531	LOADER	14	14/0	17/32"	13.5 MM	.531	25 PCS



REGULAR (STRAIGHT)




PREMIUM (BELL SHAPE)

SWIVEL HOOKS

STOCK NUMBER	APPLICATION (USE WITH)	WEIGHT / PKG (LBS)	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	STANDARD PACKAGE
20375JH	8 MM	9	3/8"	10 MM	.375	50 PCS
20437JH	8 MM	13	7/16"	11 MM	.437	
20563JH	10 MM	20	9/16"	14 MM	.563	
20563JHL	10 & 11 MM	25	9/16"	14 MM	.563	
20437SP	8 & 10 MM	14	7/16"	11 MM	.437	
20375RJH	8 MM	30	3/8"	10 MM	.375	



"JH" SWIVEL J HOOK



"SP" SWIVEL J HOOK



"RJH" RUGGO HOOK

ACCESSORIES

SIDE CHAIN FASTENERS

BAR STYLE FASTENER

STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	OVERALL LENGTH (INCHES)	STANDARD PACKAGE	PICTURE
5308	PASSENGER, LIGHT TRUCK	2	3"	25 PCS	1
5309	MEDIUM, HEAVY TRUCK	6.3	6"		
5310	TRACTOR	10	8.5"		
5313	MEDIUM TRUCK	6.3	6"		


1




CAM STYLE FASTENER

STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	OVERALL LENGTH (INCHES)	STANDARD PACKAGE	PICTURE
15003	LIGHT TRUCK	5	3"	25 PCS	2
15004	MEDIUM, HEAVY TRUCK	10	3.25"		
15008	HEAVY GRADER	0.9	4.5"		
15007	LIGHT GRADER	0.4	3.5"		3
15005	HEAVY GRADER	0.8	4.5"		

2

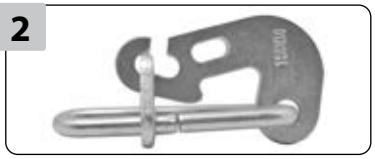


3

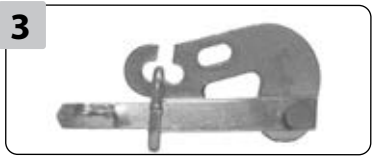

PREMIUM BOOMER STYLE FASTENER

STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	OVERALL LENGTH (INCHES)	STANDARD PACKAGE	PICTURE
15NR4	LIGHT TRUCK BOOMER STYLE FITS 5.0 - 5.5 MM SIDE CHAIN	0.2	4.75"	25 PCS	4
15NR6	HEAVY TRUCK BOOMER STYLE FITS 6.0 - 8.0 MM SIDE CHAIN	0.5	6.5"		
15NR9	GRADER BOOMER STYLE FITS 9.5 - 11 MM SIDE CHAIN	0.9	8"		

4

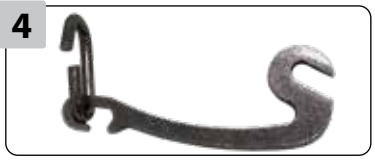

CHAIN REPAIR PLIERS

STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	OVERALL LENGTH (INCHES)	STANDARD PACKAGE	PICTURE
7301	PASSENGER	0.3	6"	1 EACH	5
7300HD	PASSENGER, LIGHT TRUCK	2.8	14"		6
QV1893	VOLT TRUCK REPAIR PLIER	7	30.5"		7
7502S	ALL TRUCK, TRACTOR SHORT HANDLE	8.1	24"		8
7302	ALL TRUCK, TRACTOR LONG HANDLE	10	36"		9

5



6



7



8



9





BOLT/CHAIN CUTTERS

STOCK NUMBER	APPLICATION	WEIGHT / PKG (LBS)	OVERALL LENGTH (INCHES)	STANDARD PACKAGE	PICTURE
BC18	PASSENGER	2.9	18"	1 EACH	10
BC24	LIGHT TRUCK	5.5	24"		
BC30	MEDIUM, HEAVY TRUCK	8.3	30"		
BC36	ALL TRUCK, TRACTOR	12.7	36"		


10



QUICK HOOKS

STOCK NUMBER	APPLICATION	WEIGHT/ PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	INSIDE PITCH (INCHES)	STANDARD PACKAGE	PICTURE
10218	PASSENGER	1	4/0	7/32"	5.5 MM	1.875"	25 PCS	1
10250	GARDEN TRACTOR		5/0	1/4"	6.4 MM			
10281	LIGHT TRUCK	2	6/0	9/32"	7 MM	2.125"		
10312	MEDIUM TRUCK		7/0	5/16"	8 MM	2.5"		
10375	HEAVY TRUCK	4	9/0	3/8"	10 MM	2.125"		
10406	TRACTOR	6	10/0	13/32"	10.3 MM	3"		


1



PREMIUM QUICK HOOKS

STOCK NUMBER	APPLICATION	WEIGHT/ PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	INSIDE PITCH (INCHES)	STANDARD PACKAGE	PICTURE
10N95-7	LIGHT TRUCK	0.18	6/0	9/32"	7 MM	1.7"	1 EACH	2
10N95	HEAVY TRUCK	0.2	7/0	5/16"	8 MM	2"		

2



CROSS CHAIN REPAIR LINKS

STOCK NUMBER	APPLICATION	WEIGHT/ PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	STANDARD PACKAGE	PICTURE
9233	PASSENGER	1	3/0	13/64"	5.2 MM	50 PCS	3
9253	LIGHT TRUCK	2	5/0	1/4"	6.4 MM		
9263	MEDIUM TRUCK	4	6/0	9/32"	7 MM		
9273	HEAVY TRUCK	5	7/0	5/16"	8 MM		

3



SQUARE LINK CROSS CHAIN REPAIR LINKS

STOCK NUMBER	APPLICATION	WEIGHT/ PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	STANDARD PACKAGE	PICTURE
9280	GRADER	8	9/0	3/8"	10 MM	10 PCS	4
9282	LOADER	13	11/0	7/16"	11 MM		
9284	GIANT OTR	22	14/0	17/32"	13.5 MM		

4



SIDE CHAIN REPAIR LINKS

STOCK NUMBER	APPLICATION	WEIGHT/ PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	INSIDE PITCH (INCHES)	STANDARD PACKAGE	PICTURE
9116A	PASSENGER	2	4/0	7/32"	5.5 MM	1.208"	50 PCS	5
9116B	LIGHT TRUCK	3	5/0	1/4"	6.4 MM	1.581"		
9116C	TRUCK	7	7/0	5/16"	8 MM	1.457"		
9116D	GRADER	11	9/0	3/8"	10 MM	1.639"		
9116E	LOADER	3	11/0	7/16"	11 MM	2.379"	10 PCS	
9116F	GIANT OTR	5	14/0	17/32"	13.5 MM	2.157"		

5



REPAIR RINGS TO REPAIR NET & DIAMOND PATTERN CHAINS

STOCK NUMBER	APPLICATION	WEIGHT/ PKG (LBS)	NOMINAL SIZE	WIRE SIZE (INCHES)	METRIC WIRE SIZE	STANDARD PACKAGE	PICTURE
RING-6	TRUCK / TRACTOR	1	5/0	1/4"	6.4 MM	1 EACH	6
RING-13	LOADER / GRADER		14/0	17/32"	13.5 MM		
RING-16	GIANT OTR		-	5/8"	16 MM		

6



COLD SHUTS

STOCK NUMBER	WIRE SIZE (INCHES)	LENGTH (INCHES)	INSIDE WIDTH (INCHES)	WEIGHT / PKG (LBS)	WORKING LOAD LIMIT (LBS)	STANDARD PACKAGE	PICTURE
CS312	5/16"	1.22"	1.06"	1	1,250	10 PCS	7
CS375	3/8"	1.45"	1.33"	1.6	1,900		
CS437	7/16"	1.5"	1.55"	2.6	2,650		

7



SHACKLES CHAIN, ANCHOR AND PIN COUPLER STYLES



GALVANIZED SCREW PIN CHAIN SHACKLE

STOCK NUMBER	WORKING LOAD LIMIT (LBS)
SGC218	700
SGC250	1,000
SGC312	1,500
SGC375	2,000
SGC437	3,000
SGC531	4,000
SGC625	6,500
-	-



ALLOY SCREW PIN ANCHOR SHACKLE

STOCK NUMBER	WORKING LOAD LIMIT (LBS)	WIRE SIZE (INCHES)	METRIC WIRE SIZE
-	-	7/32"	5.5 MM
SAC250	2,000	1/4"	6.4 MM
SAC312	2,800	5/16"	8 MM
SAC375	4,000	3/8"	10 MM
SAC437	5,200	7/16"	11 MM
SAC531	6,600	17/32"	13.5 MM
SAC625	10,000	5/8"	16 MM
SAC750	14,000	3/4"	19 MM



GALVANIZED PIN COUPLER SHACKLE

STOCK NUMBER	APPLICATION (USE WITH)
-	-
PCS250	6-8 MM
PCS312	8-9.5 MM
PCS375	9.5-11 MM
-	-
PCS531	13-16 MM
PCS625	16-19 MM
PCS750	19-22 MM



TRYGG PIN COUPLER SHACKLE

STOCK NUMBER	APPLICATION (USE WITH)
-	-
-	-
-	-
520210-3	9.5-11 MM
-	-
520215	13-16 MM
520218	16-19 MM
520221	19-22 MM



TRYGG PIN REMOVAL TOOL

STOCK NUMBER
-
350005
-
350006

CAM TOOLS "T" AND "L" HANDLES

T-HANDLE L-HANDLE

STOCK NUMBER	WEIGHT / PKG (LBS)	STOCK NUMBER	WEIGHT / PKG (LBS)	APPLICATION	STANDARD PACKAGE
T2800	11.25	L2800	10	HEAVY TRUCK	25 PCS

T-HANDLE




L-HANDLE




QUICK LINKS

STOCK NUMBER	WIRE SIZE (INCHES)	METRIC WIRE SIZE	DIMENSIONS (INCHES) A	B	C	D	E	WT/ PKG (LBS)	WORKING LOAD LIMIT (LBS)	STANDARD PACKAGE
QL125	1/8"	3.2 MM	0.19"	1.13"	1.38"	0.38"	0.19"	0.2	220	10 PCS
QL192	3/16"	4.8 MM	0.28"	1.5"	1.88"	0.5"	0.25"	0.4	660	
QL281	9/32"	7 MM	0.38"	1.75"	2.25"	0.56"	0.28"	0.8	880	
QL312	5/16"	8 MM	0.5"	2.31"	2.88"	0.69"	0.38"	1.6	1,760	
QL375	3/8"	10 MM		2.44"	3.13"	0.75"	0.44"	2.4	2,200	
QL437	7/16"	11 MM	0.53"	2.69"	3.5"	0.81"	0.5"	3.8	2,600	
QL531	17/32"	13.5 MM	0.59"	3.19"	4.13"	0.94"	0.53"	5.6	3,300	

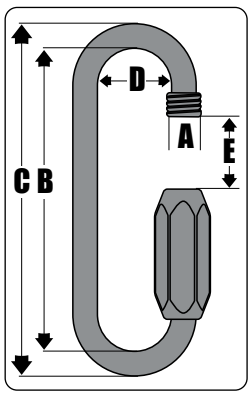

SNAP HOOKS

STOCK NUMBER	WIRE SIZE (INCHES)	METRIC WIRE SIZE	DIMENSIONS (MM) A1	A	B	D	L	WT/ PKG (LBS)	WORKING LOAD LIMIT (LBS)	STANDARD PACKAGE
SH440	5/32"	4 MM	9	5	6.5	7	40	0.2	200	10 PCS
SH550	3/16"	4.8 MM	10	6	7.5	8	50	0.4	220	
SH660	1/4"	6.4 MM	13	8	9	9	60	0.6	260	
SH770	9/32"	7 MM			10		70	1	400	
SH880	5/16"	8 MM			11.5		80	1.4	500	
SH990	11/32"	9 MM	14		13		90	2	550	
SH1010	3/8"	10 MM	15	12	15	13	100	2.6	770	
SH1112	7/16"	11 MM	18	14	19	15	120	4	980	
SH1214	15/32"	11.9 MM	20	13	18	19	140	2.8	1200	
SH1316	1/2"	12.7 MM	22	14	20	26	160	3.9		
SH1418	17/32"	13.5 MM	25	21	25	32	180	4.9	1600	
SH1520	9/16"	14.3 MM				40	200	6	1800	

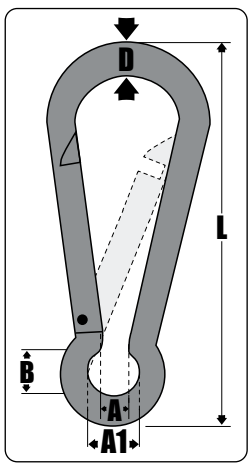

WHICH TIGHTENER IS RIGHT FOR YOU?

⚠ WARNING: ALWAYS WEAR EYE PROTECTION WHEN INSTALLING RUBBER BUNGEES, TIGHTENERS OR STRAPS.

When deciding which tightener is correct for your application, begin with what vehicle type you have and reference the information below to help find the correct product.

THIS IS ONLY A GUIDE. ACTUAL TIGHTENER MAY VARY BASED ON OVERALL TIRE DIAMETER. PLEASE CHECK PRIOR TO USE.

PASSENGER CAR

TIGHTENER	PART NUMBER	COLOR & MATERIAL	FITS RIM SIZE
SPIDER BUNGEE	0212	YELLOW RUBBER	13" - 22"
ROUND RUBBER TIGHTENER	0214	BLACK RUBBER	
VOLT	*SEE PAGE 15 FOR CORRECT VOLT BUNGEE BY PART NUMBER*		

LIGHT TRUCK / SUV

TIGHTENER	PART NUMBER	COLOR & MATERIAL	FITS RIM SIZE
SPIDER BUNGEE	0216	BLUE RUBBER	14" - 24"
ROUND RUBBER TIGHTENER	0225	BLACK RUBBER	
SPRING TIGHTENER	0272	SILVER ZINC	
VOLT	*SEE PAGE 27 FOR CORRECT VOLT BUNGEE BY PART NUMBER*		

COMMERCIAL TRUCK

TIGHTENER	PART NUMBER	COLOR & MATERIAL	FITS RIM SIZE
SPIDER BUNGEE	0218	ORANGE RUBBER	20" - 24.5"
ROUND RUBBER TIGHTENER	0229	BLACK RUBBER	
SPRING TIGHTENER	0273	SILVER ZINC	
VOLT	*SEE PAGE 43 FOR CORRECT VOLT BUNGEE BY PART NUMBER*		

LOADER / GRADER

PAGES 60-61 FOR SUGGESTED TIGHTENER BY TIRE SIZE

TIGHTENER	PART NUMBER	COLOR & MATERIAL	FITS RIM SIZE
SPIDER BUNGEE	0220	BLACK RUBBER	20" - 24"
LINK SHACKLE TIGHTENER	0294	GOLD ZINC	
LINK SHACKLE TIGHTENER	0296	GOLD ZINC	25" - UP

TRACTOR

PAGES 88-91 & 98 FOR SUGGESTED TIGHTENER BY TIRE SIZE

TIGHTENER	PART NUMBER	COLOR & MATERIAL	FITS RIM SIZE
SPIDER BUNGEE	0213	GREEN RUBBER	8" - 10"
SPIDER BUNGEE	0217	RED RUBBER	12" - 18"
SPIDER BUNGEE	0218	ORANGE RUBBER	18" - 20"
SPIDER BUNGEE	0220	BLACK RUBBER	24" - 28"
LINK SHACKLE TIGHTENER	0294	GOLD ZINC	20" - 28"
LINK SHACKLE TIGHTENER	0296	GOLD ZINC	28" - UP

FORKLIFT / SKID STEER

PAGES 71 & 74 FOR SUGGESTED TIGHTENER BY TIRE SIZE

TIGHTENER	PART NUMBER	COLOR & MATERIAL	FITS RIM SIZE
SPIDER BUNGEE	0213	GREEN RUBBER	8" - 10"
SPIDER BUNGEE	0216	BLUE RUBBER	12" - 18"
SPIDER BUNGEE	0218	ORANGE RUBBER	18" - UP

ATV / UTV

PAGES 78-79 FOR SUGGESTED TIGHTENER BY TIRE SIZE

TIGHTENER	PART NUMBER	COLOR & MATERIAL	*TIRE DIAMETER*
SPIDER BUNGEE	0213	GREEN RUBBER	20" - 22"
SPIDER BUNGEE	0217	RED RUBBER	23" - 24"
SPIDER BUNGEE	0216	BLUE RUBBER	25" - UP




0218 SPIDER BUNGEE PICTURED





0296 LINK SHACKLE PICTURED


SPIDER BUNGEES

STOCK NUMBER	APPLICATION	NUMBER OF ARMS	WEIGHT / PR (LBS)	STANDARD PACKAGE	PICTURE
0212	PASSENGER	6	1	30 PR	1
0216	LIGHT TRUCK / SUV				2
0218	COMMERCIAL TRUCK		1.6		3
0220	TRACTOR / LIGHT LOADER	7	3	20 PR	4
0213	SMALL ATV / UTV GARDEN TRACTOR SNOW BLOWER		1	30 PR	5
0217	LARGE ATV / UTV FORKLIFT / SKID STEER				6












ROUND RUBBER TIGHTENERS

STOCK NUMBER	APPLICATION	WEIGHT/ PR (LBS)	STANDARD PACKAGE	PICTURE
QV1172	VOLT PASSENGER	0.4	30 PR	7
QV1174	VOLT PASSENGER, LIGHT TRUCK	0.5		
QV1176	VOLT LIGHT TRUCK			
QV1870	VOLT TRUCK	0.6		8
QV1874				
QV1876				
QV1882				
0214	PASSENGER	0.5	30 PR	9
0225	LIGHT TRUCK / SUV	0.6		
0229	COMMERCIAL TRUCK	1		













WARNING: ALWAYS WEAR EYE PROTECTION WHEN INSTALLING RUBBER BUNGEES, TIGHTENERS OR STRAPS.

METAL SPRING TIGHTENERS


STOCK NUMBER	APPLICATION	WEIGHT/ PR (LBS)	STANDARD PACKAGE	PICTURE
0272	LIGHT TRUCK / SUV	1.5	1 PR	11
0273	COMMERCIAL TRUCK	5.7		






LINK SHACKLE TIGHTENERS


STOCK NUMBER	APPLICATION	FITS RIM SIZE	WEIGHT/ PR (LBS)	STANDARD PACKAGE	PICTURE
0294	TRACTOR & LIGHT LOADER	20"- 24"	22	1 PR	12
0296	TRACTOR, LOADER/GRADER & SKIDDER	25" - UP	26		





NATURAL RUBBER BUNGEE STRAPS

STOCK NUMBER	DESCRIPTION	STANDARD PACKAGE	PICTURE
0209	9 INCH STRAP	50 PCS / BOX (5 BUNDLES OF 10 PCS)	13
0215	15 INCH STRAP		
0221	21 INCH STRAP		
0231	31 INCH STRAP		
0241	41 INCH STRAP		

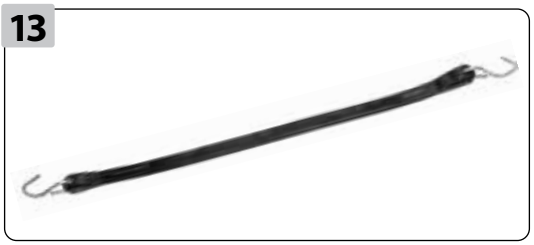

PARTS AND ACCESSORIES

MADE IN NORWAY



CONTINUOUS SIDE CHAIN

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	LINK PITCH LENGTH	STANDARD PACKAGE
311060	50	6 MM	38 MM	100′
311061	45	6 MM SUPER	34 MM	
311070	56	7 MM	42 MM	
311081	37.5	8 MM	50 MM	50′
311096	56	9.5 MM	50 MM	
311095	52	9.5 MM	62.5 MM	
311110	72.5	11 MM	60 MM	
311131	107.5	13 MM	60 MM	
311132	94	13 MM	81 MM	



BOOMER FASTENER WITH LINK

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
331220	3.8	4 MM	5 - 5.5 MM	25 PCS
331230	8.3	6 MM	6 - 7 MM	
331240	13.8	8 MM	8 MM	
331250	25.3	10 MM	9.5 - 11 MM	



BOOMER FASTENER WITH SHACKLE

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
334070	7.8	6 MM	6 - 7 MM	25 PCS
334080	16.5	8 MM	8 MM	



INNER LOCK / FLAT C-HOOK

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
333220	2.8	8 MM	6 - 7 MM	25 PCS
333230	5	9 MM	8 - 10 MM	



REPAIR RINGS

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
520111	2	9.5 MM	10 MM	1 EACH
520112	3	13 MM	13 MM	




SWISS FLEXI 3-LINK REPAIR KIT

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
306203	.5	8 MM	5709XX	1 EACH
306403	1.3	11.5 MM	5707XX	



SWISS FLEXI EXTENSION



SMT EXTENSION

TRYGG EXTENSION KITS

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
SWISS FLEXI				1 PAIR
570-03	20	8 MM	570945	
570-08	55.6	11.5 MM	570764-66	
570-09	61		570768	
570-12	50		570760	
570-13	45		570762	
SMT				
600290	12	8 MM	8 MM SMT	
600390	18	9.5 MM	9.5 MM SMT	

TRYGG PIN REMOVAL TOOL
SEE PAGE 105



PIN COUPLERS

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	FOR USE WITH	STANDARD PACKAGE
520210-3	1	10 MM	9.5 - 11 MM	3 PCS
520215	20	16 MM	13 - 16 MM	1 EACH
520218	41.3	19 MM	16 - 19 MM	
520221	50	22 MM	19 - 22 MM	

PARTS AND ACCESSORIES

TRYGG

MADE IN NORWAY



CONTINUOUS SQUARE ICE CROSS CHAIN

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	LINK PITCH LENGTH	STANDARD PACKAGE
305070	69	7 MM	25 MM	100′
305080	100	8 MM	28 MM	
305100	71	10 MM	36 MM	50′
305110	60.7	11.5 MM	41.5 MM	33′



CONTINUOUS STUDDED CROSS CHAIN

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	LINK PITCH LENGTH	STANDARD PACKAGE
301072	94	7 MM SUPER	29.5 MM	100′
301080	65	8 MM	29.5 MM	
301095	85.5	9.5 MM	36.5 MM	50′
301110	123.5	11 MM	42 MM	
301130	161	13 MM	56 MM	



CROSS CHAIN HOOKS

STOCK NUMBER	WEIGHT / PKG (LBS)	METRIC WIRE SIZE	PITCH LENGTH	STANDARD PACKAGE
320060	4	6 MM	35 MM	
320080	8.5	8 MM	43 MM	
320081	10	8 MM HYBRID	57 MM	50 PCS
320100	16	10 MM	57 MM	
320110	22.5	11 MM	61 MM	
320130	18	13 MM	70 MM	25 PCS



TIGHTENING RAILS

STOCK NUMBER	WEIGHT / PKG (LBS)	FOR USE WITH	STANDARD PACKAGE
336030	19.4	8, 9.5 & 11 MM	1 EACH
336040	37.7	13 & 16 MM	

SEE PAGE 110 FOR HOW TO MEASURE

(INSIDE OF HOOK TO INSIDE OF HOOK)

TRYGG STUDDED CROSS CHAIN WITH HOOKS



CROSS CHAIN SPECIFICATIONS | HOOK SPECIFICATIONS

CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
307581	12.66"	8	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307582	13.82"	9	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307583	14.98"	10	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307584	16.14"	11	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307585	17.3"	12	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307586	18.46"	13	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307587	19.62"	14	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307588	20.78"	15	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307589	21.94"	16	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307590	23.1"	17	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307591	24.26"	18	9/32"	7 MM	.281	320080	9/32"	8 MM	.312	ALLOY	25 PCS
307081	16.08"	10	5/16"	8 MM	.312	320100	3/8"	10 MM	.375	ALLOY	25 PCS
307083	17.24"	11	5/16"	8 MM	.312	320100	3/8"	10 MM	.375	ALLOY	25 PCS
307085	18.4"	12	5/16"	8 MM	.312	320100	3/8"	10 MM	.375	ALLOY	25 PCS
307087	20.72"	14	5/16"	8 MM	.312	320100	3/8"	10 MM	.375	ALLOY	25 PCS
307088	23.04"	16	5/16"	8 MM	.312	320100	3/8"	10 MM	.375	ALLOY	25 PCS
307121	16.32"	8	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307122	17.76"	9	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307123	19.2"	10	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307124	20.64"	11	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307125	22.08"	12	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307126	23.52"	13	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307127	24.96"	14	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS
307128	26.4"	15	3/8"	9.5 MM	.375	320110	7/16"	11 MM	.437	ALLOY	25 PCS

WIRE DIAMETER CROSS REFERENCE CHART

NOMINAL WEIGHTS AND DIMENSIONS ARE SUBJECT TO TOLERANCE OF PLUS OR MINUS 4%

NOMINAL SIZE	GAUGE	FRACTIONAL (INCHES)	METRIC
1/0	.177	11/64"	4.5 MM
2/0	.192	3/16"	4.8 MM
3/0	.207	13/64"	5.2 MM
4/0	.218	7/32"	5.5 MM
5/0	.250	1/4"	6.4 MM
6/0	.281	9/32"	7 MM
7/0	.312	5/16"	8 MM
8/0	.344	11/32"	9 MM
9/0	.375	3/8"	10 MM
10/0	.406	13/32"	10.3 MM
11/0	.437	7/16"	11 MM
13/0	.500	1/2"	13 MM
14/0	.531	17/32"	13.5 MM


FINDING YOUR REPLACEMENT CROSS CHAIN


To find the correct replacement cross chain for your application, follow these simple steps and refer to the tables on pages 111 - 115.



STEP 1:

Determine what type of chain you have. (If possible, measure wire diameter)

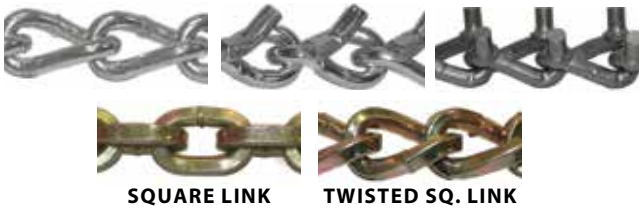

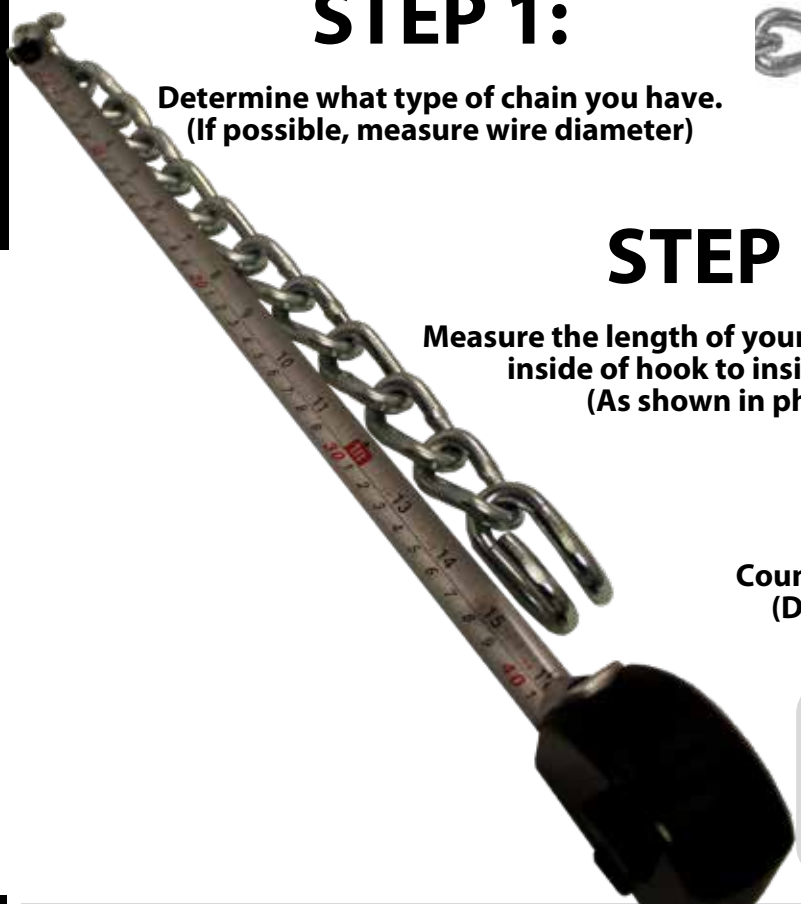

STEP 2:

Measure the length of your cross chain from inside of hook to inside of hook. (As shown in photos)

STEP 3:

Count the number of links in your cross chain. (Do not count the outside hooks as links)

USE THIS INFORMATION TO FIND YOUR REPLACEMENT CROSS CHAIN ON THE FOLLOWING PAGES.

REPLACEMENT CROSS CHAIN

SEE PAGE 110 FOR HOW TO MEASURE

(INSIDE OF HOOK TO INSIDE OF HOOK)

ROUND TWIST



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
6219	12.12"	9	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6221	13.24"	10	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6221LM	13.24"	10	7/32"	5.5 MM	.218	A20250	1/4"	6.4 MM	.250	ALLOY	25 PCS
6223	14.08"	11	7/32"	5.5 MM	.218	20312	5/16"	8 MM	.312	CARBON	25 PCS
6225	15.12"	12	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6225LM	15.12"	12	7/32"	5.5 MM	.218	A20250	1/4"	6.4 MM	.250	ALLOY	25 PCS
6229	17.1"	14	7/32"	5.5 MM	.218	20312	5/16"	8 MM	.312	CARBON	25 PCS
6250	13.32"	8	9/32"	7 MM	.281	20312	5/16"	8 MM	.312	CARBON	25 PCS
6251	14.37"	9	9/32"	7 MM	.281	A20250	1/4""	6.4 MM	.250	CARBON	25 PCS
6251CL	14"	11	15/64"	5.9 MM	.230	A20281	9/32"	7 MM	.281	ALLOY	25 PCS
6251LM	14.37"	9	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6253	15.62"	10	9/32"	7 MM	.281	A20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6253CL	16.25"	13	15/64"	5.9 MM	.230	A20281	9/32"	7 MM	.281	ALLOY	25 PCS
6253LM	15.62"	10	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6254	16.84"	11	9/32"	7 MM	.281	20312	5/16"	8 MM	.312	CARBON	25 PCS
6255	12.88"	7	5/16"	8 MM	.312	20312	5/16"	8 MM	.312	CARBON	25 PCS
6256	14.62"	8	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6256HH	14.62"	8	5/16"	8 MM	.312	20406	13/32"	10.3 MM	.406	CARBON	25 PCS
6258	17.25"	11	9/32"	7 MM	.281	20375	3/8"	10 MM	.375	CARBON	25 PCS
6259	18.12"	12	9/32"	7 MM	.281	A20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6260	16.01"	9	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6260HH	16.01"	9	5/16"	8 MM	.312	20406	13/32"	10.3 MM	.406	CARBON	25 PCS
6260LM	16.01"	9	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
6263	17.4"	10	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6263LM	17.4"	10	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
6265	23.12"	16	9/32"	7 MM	.281	20375	3/8"	10 MM	.375	CARBON	25 PCS
6266	18.79"	11	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6267	24.37"	17	9/32"	7 MM	.281	A20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6268	20.36"	12	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6434	17.36"	11	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	25 PCS
A6434	17.36"	11	3/8"	10 MM	.375	A20406	13/32"	10.3 MM	.406	ALLOY	25 PCS
6434HH	17.36"	11	3/8"	10 MM	.375	20437S	7/16"	11 MM	.437	CARBON	25 PCS
6438	20.5"	13	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	25 PCS
6438HH	20.5"	13	3/8"	10 MM	.375	20437S	7/16"	11 MM	.437	CARBON	25 PCS
6445	21.14"	14	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	25 PCS
A6445	21.14"	14	3/8"	10 MM	.375	A20406	13/32"	10.3 MM	.406	ALLOY	25 PCS
6453HH	16.56"	10	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	25 PCS
6630	24.5"	17	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	10 PCS
A6630	25"	17	3/8"	10 MM	.375	A20406	13/32"	10.3 MM	.406	ALLOY	10 PCS
6640	28"	15	7/16"	11 MM	.437	20437	7/16"	11 MM	.437	CARBON	10 PCS
A6640	28"	15	7/16"	11 MM	.437	A20437AL	7/16"	11 MM	.437	ALLOY	10 PCS
6650	34.4"	19	7/16"	11 MM	.437	20437	7/16"	11 MM	.437	CARBON	10 PCS
A6650	34.4"	19	7/16"	11 MM	.437	A20437AL	7/16"	11 MM	.437	ALLOY	10 PCS
6660	37.75"	19	17/32"	13.5 MM	.531	20531	17/32"	13.5 MM	.531	CARBON	5 PCS
A6660	39.3"	19	17/32"	13.5 MM	.531	A20531	17/32"	13.5 MM	.531	ALLOY	5 PCS
6670	44.5"	22	17/32"	13.5 MM	.531	20531	17/32"	13.5 MM	.531	CARBON	5 PCS
6680	51.5"	26	17/32"	13.5 MM	.531	20531	17/32"	13.5 MM	.531	CARBON	5 PCS
7213	21.57"	13	5/16"	8 MM	.312	A20281	9/32"	7 MM	.281	CARBON	25 PCS

(ROUND TWIST CROSS CHAIN CONTINUES ON PAGE 112)

REPLACEMENT CROSS CHAIN

SEE PAGE 110 FOR HOW TO MEASURE

(INSIDE OF HOOK TO INSIDE OF HOOK)

ROUND TWIST

(CONTINUED FROM PAGE 111)



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
7213CL	21.75"	15	9/32"	7 MM	.281	A20281	9/32"	7 MM	.281	ALLOY	25 PCS
7213LM	21.5"	13	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
7214	22.96"	14	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
7214LM	23"	14	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
7215	24.35"	15	5/16"	8 MM	.312	A20281	9/32"	7 MM	.375	CARBON	25 PCS
7215CL	24.5"	17	9/32"	7 MM	.281	A20281	9/32"	7 MM	.281	ALLOY	25 PCS
7215LM	24.35"	15	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
7216	31.3"	20	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
7420	23.66"	16	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	10 PCS
7426	27.44"	19	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	10 PCS
7465XD	17.4"	10	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
9562	31.29"	17	7/16"	11 MM	.437	20437	7/16"	11 MM	.437	CARBON	10 PCS
9567	39.1"	22	7/16"	11 MM	.437	20437	7/16"	11 MM	.437	CARBON	10 PCS

V-BAR



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
5814	10.18"	7	13/64"	5.2 MM	.207	20230	15/64"	5.9 MM	.230	CARBON	25 PCS
5820	12.02"	9	13/64"	5.2 MM	.207	20230	15/64"	5.9 MM	.230	CARBON	25 PCS
5824	14"	11	13/64"	5.2 MM	.207	20230	15/64"	5.9 MM	.230	CARBON	25 PCS
5822	12.94"	10	13/64"	5.2 MM	.207	20230	15/64"	5.9 MM	.230	CARBON	25 PCS
5826	16"	13	13/64"	5.2 MM	.207	20230	15/64"	5.9 MM	.230	CARBON	25 PCS
6819	12.12"	9	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6821	13.12"	10	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6822	14.37"	9	9/32"	7 MM	.281	20312	5/16"	8 MM	.312	CARBON	25 PCS
6825	15.12"	12	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	25 PCS
6830	25"	17	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	10 PCS
6853	15.64"	10	9/32"	7 MM	.281	20312	5/16"	8 MM	.312	CARBON	25 PCS
6858	17.25"	11	9/32"	7 MM	.281	20375	3/8"	10 MM	.375	CARBON	25 PCS
6859	18.12"	12	9/32"	7 MM	.281	20312	5/16"	8 MM	.312	CARBON	25 PCS
6860	16.01"	9	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6863	17.4"	10	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS
6866	18.79"	11	5/16"	8 MM	.312	20375	3/8"	10 MM	.375	CARBON	25 PCS

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408

REPLACEMENT CROSS CHAIN

SEE PAGE 110 FOR HOW TO MEASURE
(INSIDE OF HOOK TO INSIDE OF HOOK)

SQUARE LINK



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
6221SL	14.18"	11	7/32"	5.5 MM	.218	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6225SL	15.4"	13	7/32"	5.5 MM	.218	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6229SL	18.25"	15	7/32"	5.5 MM	.218	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6251SL	14.5"	9	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6253SL	17"	11	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6255SL	12"	7	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
6259SL	19"	13	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6260SL	16.04"	9	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
6263SL	18.76"	11	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
6268SL	21.48"	13	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
E6520S	27″	17	5/16″	8 MM	.312	A20406	13/32″	10.3 MM	.406	ALLOY	25 PCS
E6520N	26″	17	5/16″	8 MM	.312	A20406	13/32″	10.3 MM	.406	ALLOY	25 PCS
E6530S	26.5″	17	3/8″	10 MM	.375	A20437AL	7/16″	11 MM	.437	ALLOY	10 PCS
E6530N	25.75″	15	3/8″	10 MM	.375	A20437AL	7/16″	11 MM	.437	ALLOY	5 PCS
E6540SH	32.25″	17	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	10 PCS
E6540N	32″	17	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6550SH	35.5″	19	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	10 PCS
E6550N	35.5″	19	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6560SH	38.69″	21	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6560N	39″	19	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6570SH	45.72″	25	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6570N	44.5″	25	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6580SH	51.83″	29	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6580N	52″	27	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
E6590SH	56.7″	31	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
7213HDSL	20.75"	13	3/8"	10 MM	.375	A20437AL	7/16"	11 MM	.437	ALLOY	10 PCS
7215SL	24.25"	15	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
7419SL	21.3"	13	3/8"	10 MM	.375	A20437AL	7/16"	11 MM	.437	ALLOY	10 PCS

TWISTED SQUARE LINK



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
6221SLTWIST	13.25"	10	7/32"	5.5 MM	.218	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6225SLTWIST	15"	12	7/32"	5.5 MM	.218	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6251SLTWIST	14.5"	9	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6253SLTWIST	15.5"	10	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6260SLTWIST	16.01"	9	5/16"	8 MM	.312	A20375	3/8"	10 MM	.375	ALLOY	25 PCS
6263SLTWIST	17.25"	10	5/16"	8 MM	.312	A20375	3/8"	10 MM	.375	ALLOY	25 PCS
6268SLTWIST	22"	13	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
7214SLTWIST	23.5"	14	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS
7215SLTWIST	24.75"	15	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS

REPLACEMENT CROSS CHAIN

SEE PAGE 110 FOR HOW TO MEASURE

(INSIDE OF HOOK TO INSIDE OF HOOK)

STUDDED



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
6912	15.13"	10	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	25 PCS
6913	16.13"	11	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	25 PCS
6915	18.63"	13	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6915LW	18.25"	13	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6916LW	19.75"	14	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6918LW	22.2"	16	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6920LW	23.75"	18	9/32"	7 MM	.281	A20312AL	5/16"	8 MM	.312	ALLOY	25 PCS
6923	17.13"	11	5/16"	8 MM	.312	A20393	3/8"	10 MM	.393	ALLOY	25 PCS
6925	19.38"	13	5/16"	8 MM	.312	A20393	3/8"	10 MM	.393	ALLOY	25 PCS
6926	20.63"	14	5/16"	8 MM	.312	A20393	3/8"	10 MM	.393	ALLOY	25 PCS
6930N	26″	14	3/8″	10 MM	.375	A20437AL	7/16″	11 MM	.437	ALLOY	10 PCS
6931HD	23"	16	5/16"	8 MM	.312	A20393	3/8"	10 MM	.393	ALLOY	10 PCS
6932HD	25.13"	18	5/16"	8 MM	.312	A20393	3/8"	10 MM	.393	ALLOY	10 PCS
6935N	17.4″	11	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	10 PCS
6940N	29.75″	15	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	10 PCS
6950N	36.4″	19	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	10 PCS
6960N	39.11″	17	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
6970N	44.5″	19	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
6980N	51.5″	27	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
7915	24.5"	18	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	25 PCS



ROUND TWIST H-PATTERN

CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
6221HP	13"	10	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	10 PCS
6229HP	17"	14	7/32"	5.5 MM	.218	20250	1/4"	6.4 MM	.250	CARBON	10 PCS
6258HP	18"	12	9/32"	7 MM	.281	20312	5/16"	8 MM	.312	CARBON	10 PCS
DUO292	18.25″	9	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO293	20″	10	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO294	22″	11	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO295	23.3″	12	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO296	25.25″	13	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO297	26.75″	14	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO298	31.5″	17	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO299	35.25″	19	3/8″	10 MM	.375	20406	13/32″	10.3 MM	.406	CARBON	5 PCS
DUO301	38"	21	3/8"	10 MM	.375	20406	13/32"	10.3 MM	.406	CARBON	5 PCS
DUO292LW	18.5"	9	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	5 PCS
DUO293LW	20"	10	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	5 PCS
DUO295LW	23.5"	12	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	5 PCS
DUO294LW	21.75"	11	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	5 PCS
DUO297LW	26.75"	14	9/32"	7 MM	.281	A20344	11/32"	9 MM	.344	ALLOY	5 PCS

MORE CHAIN STYLES & FITMENTS AVAILABLE ON OUR WEBSITE: WWW.QUALITYCHAINCORP.COM
EMAIL: INFO@QUALITYCHAINCORP.COM OR CALL US DIRECT: (503) 614-9664 / CA & NV CUSTOMERS CALL: (916) 409-0408

REPLACEMENT CROSS CHAIN

SEE PAGE 110 FOR HOW TO MEASURE
(INSIDE OF HOOK TO INSIDE OF HOOK)

SQUARE LINK H-PATTERN



LINK-OVER-LINK PATTERN PICTURED

⚠ NOTE: LINK-OVER-LINK ONLY AVAILABLE ON 8902 - 8909 PATTERNS.
8914 - 8922 PATTERNS ARE A STANDARD SQUARE LINK H-PATTERN DESIGN.

CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
8902	28.5″	19	3/8″	10 MM	.375	A20437AL	7/16″	11 MM	.437	ALLOY	1 EACH
8903	28.75″	15	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8905	35.5″	19	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8906	37.5″	21	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8907	36.5″	19	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8908	38.75″	21	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8909	42″	23	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8914	18"	11	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	1 EACH
8918	23.25"	15	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	1 EACH
8922	28.25"	19	5/16"	8 MM	.312	A20375AL	3/8"	10 MM	.375	ALLOY	1 EACH

STUDDED H-PATTERN



CROSS CHAIN SPECIFICATIONS						HOOK SPECIFICATIONS					
CROSS CHAIN STOCK NUMBER	INSIDE LENGTH HOOK TO HOOK (INCHES)	NO. OF LINKS	WIRE SIZE (INCHES)	METRIC WIRE SIZE	GAUGE	HOOK STOCK NUMBER	HOOK WIRE SIZE (INCHES)	HOOK METRIC WIRE SIZE	HOOK GAUGE	X-CHAIN STEEL TYPE	STD PKG
8502	29.1″	16	3/8″	10 MM	.375	A20437AL	7/16″	11 MM	.437	ALLOY	5 PCS
8503	29.5″	15	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
8504	32.9″	17	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
8505	36.1″	19	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	5 PCS
8506	39.3″	21	7/16″	11 MM	.437	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8507	35.6″	15	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8508	39.6″	17	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8510	45.6″	20	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH
8511	47.6″	21	17/32″	13.5 MM	.531	A20531	17/32″	13.5 MM	.531	ALLOY	1 EACH

WHAT DO I NEED TO BE LEGAL?

NEED HELP FIGURING OUT WHAT MAKES YOU D.O.T. LEGAL WHEN DRIVING IN STATES WITH CHAIN LAWS?

ARE CHAINS LEGAL?

Tire chains are legal in all 50 states and, in certain areas, are REQUIRED! Certain states have some restrictions prohibiting the use of studded chains on paved roads.

HOW MANY DO I NEED?

Use the links on the next page to look up chain requirements for each state with tire chain laws. If the state you are looking for is not listed, visit the D.O.T. website for that state.

ARE EASYSOX LEGAL?


EasySox have been approved for use on passenger, light truck, SUV and commercial trucks in all 50 states. This includes states that require certification for fabric traction devices such as Washington and Colorado.



STATE CHAIN REQUIREMENTS FOR TRUCKS


Note: This is only a guide. Actual chain requirements vary from state to state.

DUAL AXLE CHAINING DIAGRAM:

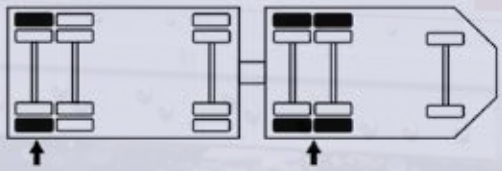

Chains on trailers may be staggered front and back.

All drive wheels may be required to use chains if conditions warrant.

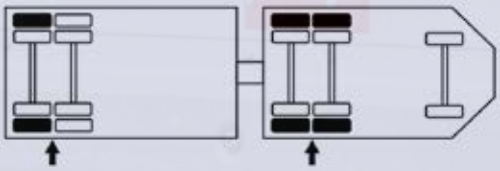


Two outside wheels must be chained.

All drive wheels may be required to use chains if conditions warrant.

SINGLE AXLE CHAINING DIAGRAM:

LINK CHAIN REQUIRED ON ALL DRIVE TIRES

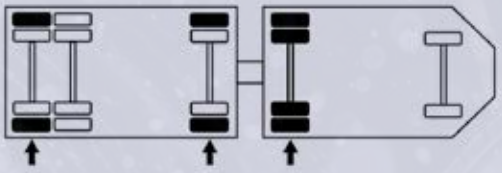

Chains on trailers may be staggered front and back.

Drive axle must be chained.



Two outside wheels must be chained.

Drive axle must be chained.



COMMON CHAIN LAW STATES:

VISIT EACH STATE'S DEPARTMENT OF TRANSPORTATION WEBSITE FOR SPECIFIC CHAIN REGULATIONS

OREGON: ***WWW.TRIPCHECK.COM/PAGES/MINIMUM-CHAIN-REQUIREMENTS.ASP***

WASHINGTON: ***WSDOT.COM/TRAVEL/REAL-TIME/MOUNTAINPASSES/TIRESANDCHAINS COMMERCIAL-VEHICLE-CHAIN-REQUIREMENTS***

CALIFORNIA: ***DOT.CA.GOV/TRAVEL/WINTER-DRIVING-TIPS/CHAIN-REQUIREMENTS***


NEVADA: ***WWW.NEVADADOT.COM/HOME/SHOWDOCUMENT?ID=96***

WYOMING: ***DOT.STATE.WY.US/home/travel/winter/chain_law.html***

COLORADO: ***CSP.COLORADO.GOV/CHAIN-LAW-INFORMATION***

VISIT OUR WEBSITE!

YOUR ULTIMATE TOOL FOR TIRE CHAIN INFORMATION!

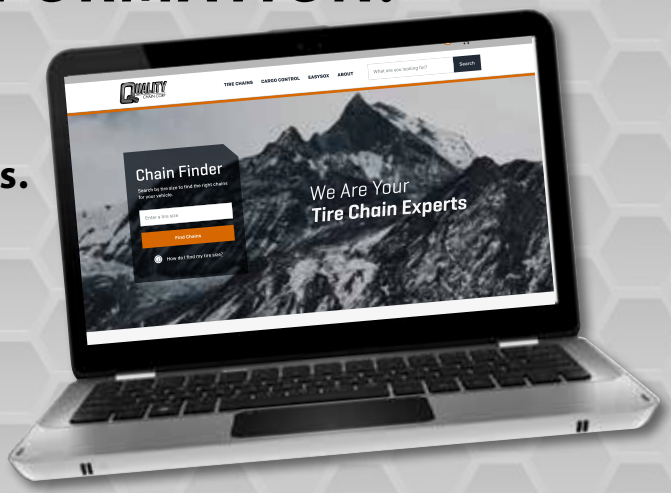


EASY!

Browse our large selection of products. Search by part number or tire size!

HELPFUL!

View installation videos and instructions. Find specifications on all our products.

Industry information, warranties, warnings, terms and conditions of sale and other important information available at the click of your finger. Don't forget to sign up for our newsletter to receive new product updates and specials!

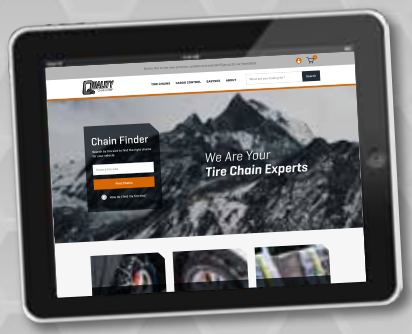

FAST!

Create a shortcut on your desktop and bookmark our page for instant access!

ALSO DESIGNED FOR USE WITH YOUR MOBILE DEVICE!



SCAN QR CODE TO GO DIRECTLY TO OUR WEBSITE

For more information, up-to-date tire fitments, installation videos or to download this catalog to your computer; visit our website at:

WWW.QUALITYCHAINCORP.COM

STANDARD CHAIN SPECIFICATIONS

STOCK NUMBER	X-CHAIN PER 1/2 PAIR	X-CHAIN DIAMETER	LINKS PER X-CHAIN	X-CHAIN WIDTH	SIDE CHAIN LENGTH
LIGHT TRUCK / SUV					
1661	12	0.385	N/A	13.5″	75″
1663	14	0.385	N/A	14.5″	85″
1665	12	0.385	N/A	14.5″	74.5″
1669	13	0.385	N/A	14.5″	80″
1673	12	0.385	N/A	15.5″	75″
1675	14	0.385	N/A	15.5″	85″
1678	15	0.385	N/A	15.5″	90.5″
1679	14	0.385	N/A	16.25″	85″
1680	14	0.385	N/A	17.5″	85″
1681	15	0.385	N/A	17″	90″
2214(QC), 2814(QC)	15	0.218	10	13.12″	86.2″
2216(QC), 2816(QC)	12	0.218	10	13.12″	71.3″
2219(QC), 2819(QC)	13	0.218	10	13.12″	77.5″
2221(QC), 2821(QC)	14	0.218	10	13.12″	80.9″
2228(QC), 2828(QC)	14	0.218	12	15.12″	82.7″
2229(QC), 2829(QC)	12	0.218	12	15.12″	72.3″
2435HH	9	0.312	8	14.62″	72.8″
2437HH	10	0.312	8	14.62″	79.3″
2439HH	10	0.312	9	16.01″	77.2″
2440HH	11	0.312	9	16.01″	84″
3210(QC), 3810(QC)	13	0.218	12	15.12″	76.4″
3227(QC), 3827(QC)	10	0.281	10	15.62″	76.6″
3228(QC), 3828(QC)	11	0.281	10	15.62″	82″
3229(QC), 3829(QC)	10	0.281	12	18.12″	77.4″
3231(QC), 3831(QC)	11	0.281	12	18.12″	84″
3235(QC), 3835(QC)	12	0.281	12	18.12″	91.2″
TRUCK					
2141SLC	14	0.281	9	14.60″	106.5″
2145SLC	15	0.281	9	14.60″	113.3″
2147SLC	13	0.281	11	16.75″	106″
2149SLC	15	0.281	11	16.75″	115.6″
2239(QC), 2839(QC)	13	0.281	9	14.37″	98.8″
2241(QC), 2841(QC)	14	0.281	9	14.37″	106.5″
2245(QC), 2845(QC)	15	0.281	9	14.37″	113.3″
2247(QC), 2847(QC)	14	0.281	10	15.62″	106.5″
2249(QC), 2849(QC)	15	0.281	10	15.62″	115.6″
2251(QC), 2851(QC)	14	0.312	9	16.01″	114″
2255(QC), 2855(QC)	14	0.312	10	17.40″	115.9″
2441HH	11	0.375	11	17.36″	88.9″
2445HH	12	0.375	11	17.36″	97.1″
2448HH	13	0.375	11	17.36″	103.9″
2452HH	14	0.375	11	17.36″	110.2″
3255(QC), 3255LMC	14	0.312	13	21.57″	106.2″
3261(QC), 3261LMC	16	0.312	14	22.96″	119.8″
3269(QC), 3269LMC	13	0.312	15	24.35″	101.8″
3271(QC), 3271LMC	14	0.312	15	24.35″	106.9″

STOCK NUMBER	X-CHAIN PER 1/2 PAIR	X-CHAIN DIAMETER	LINKS PER X-CHAIN	X-CHAIN WIDTH	SIDE CHAIN LENGTH
LOADER / GRADER					
2612 (V)	14	0.375	17	25″	114.6″
2615(V)	16	0.375	17	25″	126.1″
2624 (V)	13	0.437	15	28″	121.5″
2627 (V)	15	0.437	15	28″	138.9″
2633	14	0.437	19	34.4″	128″
2636	15	0.437	19	34.4″	138.9″
2642	18	0.437	19	34.4″	164.9″
2645	15	0.531	19	39.3″	143.7″
2657	17	0.531	22	44.5″	161.7″
2672	17	0.531	26	51.5″	161.7″
2675	18	0.531	26	51.5″	170.7″
TRACTOR					
DUO210	7	0.375	10	20″	102″
DUO214	7	0.375	9	18.25″	108.5″
DUO218	9	0.375	10	20″	131.9″
DUO226	8	0.375	9	18.25″	119.1″
DUO229	8	0.375	10	20″	119.1″
DUO239	7	0.375	12	23.3″	108.5
DUO240	8	0.375	12	23.3″	119.1″
DUO241	6	0.375	11	22″	90″
DUO242	9	0.375	11	22″	131.9″
DUO246	11	0.375	11	22″	161.6″
DUO250	9	0.375	12	23.3″	131.9″
DUO252	10	0.375	12	23.3″	144.6″
DUO256	13	0.375	14	26.75″	206.6″
DUO262	9	0.375	14	26.75″	131.9″
DUO266	10	0.375	14	26.75″	144.6″
DUO268	8	0.375	17	31.5″	123.4″
DUO269	9	0.375	17	31.5″	131.9″
DUO270	11	0.375	14	26.75″	161.6″
DUO271	9	0.375	17	31.5″	140.4″
DUO272	11	0.375	17	31.5″	165.9″
DUO273	10	0.375	17	31.5″	148.9″
DUO276	12	0.375	19	35.25″	172.3″
DUO277	13	0.375	17	31.5″	198″
DUO278	9	0.375	21	39.5″	180″
DUO280	9	0.375	19	35.25″	130.2″
DUO281	10	0.375	19	35.25″	145.4″
SKID STEER					
1501-2	18	0.312	9	16.01"	77.87"
1502-2	18	0.312	12	20.36"	77.87"
1503-2	22	0.312	12	20.36"	92.36"
ATV / UTV					
ATV-A	9	.207	12	14"	52"
ATV-B	10	.207	12	14"	54"
ATV-C	10	.207	12	14"	56"
ATV-D	12	.250	12	15.12"	67.5"



CORPORATE HEADQUARTERS - HILLSBORO, OR



ADDITIONAL WAREHOUSES

- ROCKLIN, CA
- CEDAR RAPIDS, IA

FOR MORE INFORMATION, UPDATED TIRE FITMENTS, INSTALLATION VIDEOS OR TO DOWNLOAD THIS CATALOG;
VISIT OUR WEBSITE AT: WWW.QUALITYCHAINCORP.COM

PROUDLY OFFERING

YOUR ONE-STOP SHOP FOR ALL CARGO CONTROL PRODUCTS



QUALITY CARGO CONTROL

Go online and visit our cargo control website!
QUALITYCARGOCONTROL.COM

WEB SLING & TIE DOWN ASSOCIATION MEMBER TM

SPECIALIZING IN:
FLATBED, INDUSTRIAL, INTERIOR VAN, AUTO HAULING, HARDWARE & CUSTOM STRAPS

QUALITY CHAIN CORP

TIRE CHAINS FOR ALL YOUR NEEDS
PRODUCT AND SERVICE SECOND TO NONE!