




High Volt




3365 NW 215th Ave.
Hillsboro, OR 97124

Installation Instructions

SAE CLASS "S" CLEARANCE APPROVED

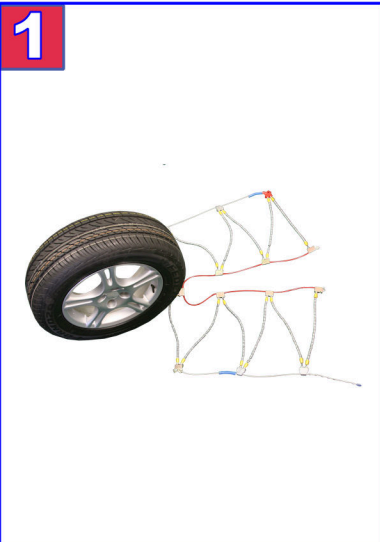

1) Park vehicle on level ground and away from traffic. Set emergency brake. Chains are to be installed on drive axle wheels (example: rear wheel drive, place chains on rear tires. Front wheel drive, place chains on front tires.)

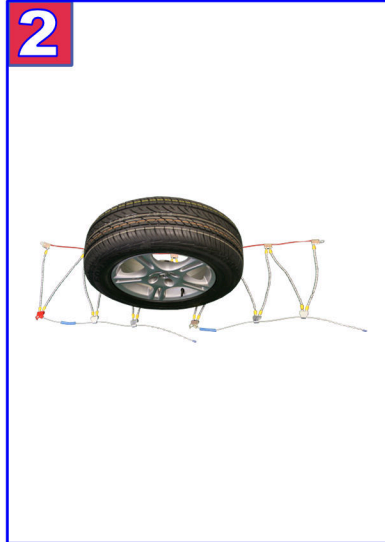

2) Lay cable chain on ground with smooth side of the cross member hooks (stamped "Tire Side") facing up. Move the chain in a sweeping motion under the vehicle so the chain continues around the back-side of the tire.



3) Reach around the back of the tire with both arms and grab both ends of the non-split side cable that is furthest away from you. Pull both ends to the top of the tire so the fasteners can be seen and handled more easily. Fasten the rear side cable by connecting the quick hook to the chain link.



4) Next, center the cable chain on the tire so that each side cable extends equally down the side walls of the tire. At the top front of the tire, take the "Nubbed" end of the outside cable and thread it through the red key hole fastener.



5) Grab the outside cable with both hands and pull it towards you to create as much slack as possible; then take the "Nubbed" end of the lower outside cable (near the ground) and thread it through the gold key hole fastener. Make sure that both fasteners (top and bottom) are adjusted within one "Nub" of each other.



6) Move the vehicle forward or backwards 5 - 10 feet. Re-tighten both fasteners as equally as possible to remove any excess slack.



7) To secure the "Nubbed" ends of the outside cable, move the blue spiral plastic over them using a turning motion.



8) Chain tighteners and/or adjusters should not be used on the High Volt. Box 8 shows a High Volt chain that has been correctly installed.

Warranties DISCLAIMER OF WARRANTIES:

1. This product is warranted free from defects in workmanship and material for thirty (30) days from delivery to a user. No other express warranty is given and no affirmation of seller, by words or action, shall constitute a warranty.
2. The above warranty is made only to the dealer, retailer, or other direct customer of Quality Chain Corporation. Quality Chain makes no warranty to the ultimate user and prohibits the transfer of the warranty given above to its direct customer to any subsequent purchaser, including but not limited to, the ultimate user.
3. REMEDIES: The Buyer's sole remedy for breach of any warranty is limited exclusively to obtaining, at the discretion of Quality Chain, either credit, repair or replacement of any product sold hereunder. Product shall be returned to place of purchase, transportation prepaid within thirty (30) days after delivery to a user and within ten (10) days of discovery of alleged defect, and which Quality Chain's inspection shall determine to be defective. Buyer shall not be entitled to recover any incidental or consequential damages. No material shall be returned without written consent of the seller.